
Monitoring Relays True RMS 3-Phase, 3-Phase+N, Multi-function Type DPB71



- TRMS 3-phase over and under voltage, phase sequence and phase loss monitoring relay
- Detects when all 3 phases are present and have the correct phase sequence
- Detects if all the 3-phase-phase or phase-neutral voltages are within the set limits
- . Upper and lower limits separately adjustable
- Measures on own power supply
- Selection of measuring range by DIP-switches
- Adjustable voltage on relative scale
- Adjustable delay function (0.1 to 30 s)
- Output: 5 A SPDT relay N.È.
- For mounting on DIN-rail in accordance with DIN/EN 50 022
- 35.5 mm DIN-rail housing
- LED indication for relay, alarm and power supply ON

Product Description

3-phase or 3-phase+neutral line voltage monitoring relay for phase sequence, phase loss, over and under voltage (separately adjustable set points) with built-in time delay function.

Supply ranges from 208 to 480 VAC covered by two multivoltage relays.

35.5 mm wide housing suitable both for back and front panel mounting.

Ordering Key	DPB 71 C M23
Housing ————————————————————————————————————	
Item number — Output —	
Power supply ————	

Type Selection

Mounting	Output	Supply: 208 to 240 VAC	Supply: 380 to 480 VAC
DIN-rail	SPDT	DPB 71 C M23	DPB 71 C M48

Input Specifications

_ 	
Input L1, L2, L3, N Note: Connect the neutral only	Terminals L1, L2, L3, N Measure on own supply
if it is intrinsically at the star centre	
Measuring ranges	
208 to 240 Δ VAC	177 to 275 Δ VAC
380 to 480 ∆ VAC	323 to 550 Δ VAC
Ranges	
Upper level	+2 to +22%
I ower level	of the nominal voltage
201101 10101	of the nominal voltage
Note: The input voltage	
must not exceed the maximum	
rated voltage or drop below	
the minumum rated voltage reported above.	
Hysteresis	
Set points from 2 to 4%	1%
Set points from 4 to 22%	2%

Output Specifications

SPDT relay		
250 VAC		
μ		
5 A @ 250 VAC		
5 A @ 24 VDC		
2.5 A @ 250 VAC		
2.5 A @ 24 VDC		
≥ 30 x 10 ⁶ operations		
≥ 10 ⁵ operations		
(at 5 A, 250 V, $\cos \varphi = 1$)		
≤ 7200 operations/h		
_ / 200 operations/11		
011/40/		
2 kVAC (rms)		
4 kV (1.2/50 μs)		



Supply Specifications

Overvoltage cat. III Power supply (IEC 60664, IEC 60038) Rated operational voltage through terminals: L1, L2, L3, N 208 to 240 VAC ± 15% M23 - Delta Voltage: 45 to 65 Hz M48 - Delta Voltage: 380 to 480 VAC ± 15% 45 to 65 Hz M48 - Star Voltage: 220 to 277 VAC ± 15% 45 to 65 Hz Rated operational power DPB71CM23 13 VA @ 230 ∆VAC, 50 Hz DPB71CM48 13 VA @ 400 ΔVAC, 50 Hz Supplied by L1 and L3

General Specifications

Power ON delay	1 s ± 0.5 s or 6 s ± 0.5 s
Reaction time Incorrect phase sequence or total phase loss Voltage level	< 200 ms (input signal variation from -20% to +20% or from +20% to -20% of set value)
Alarm ON delay Alarm OFF delay	< 200 ms (delay < 0.1 s) < 200 ms (delay < 0.1 s)

General Specifications (cont.)

(15 min warm-up time) ± 1000 ppm/°C ± 10% on set value ± 50 ms ± 0.5% on full-scale LED, green	
LED, red (flashing 2 Hz during delay time) LED, yellow	
IP 20 3 -20 to 60°C, R.H. < 95% -30 to 80°C, R.H. < 95%	
35.5 x 81 x 67.2 mm	
Approx. 100 g	
Max. 0.5 Nm according to IEC 60947	
UL, CSA	
Yes	
Electromagnetic Compatibility According to EN 61000-6-2 According to EN 61000-6-3	

Mode of Operation

Connected to the 3 phases (and neutral) DPB71 operates when all 3 phases are present at the same time, the phase sequence is correct and the phase-phase (or phase-neutral) voltage levels are within set limits.

If one or more phase-phase

or phase-neutral voltages exceeds the upper set level or drops below the lower set level, the red LED starts flashing 2 Hz and the output relay releases after the set time period. If the phase sequence is wrong or one phase is lost, the output relay releases immediately.

Only 200 ms delay occurs. The failure is indicated by the red LED flashing 5 Hz during the alarm condition.

Example 1

(mains network monitoring)
The relay monitors over and under voltage, phase loss and correct phase sequence.

Example 2

(load monitoring)

The relay releases in case of interruption of one or more phases, when one or more voltages drop below the lower set level or exceed the upper set level.

Function/Range/Level and Time Delay Setting

Adjust the input range setting the DIP switches 3 and 4 as shown below.

Select the desired function setting the DIP switches 1 and 2 as shown below.

To access the DIP swiches open the grey plastic cover as shown below.



Selection of level and time delay:

Upper knob:

Setting of lower level on rel-


ative scale.

Centre knob:

Setting of upper level on relative scale.

Lower knob:

Setting of delay on alarm time on absolute scale (0.1 to 30 s).



Power ON delay


ON: $6s \pm 0.5s$ OFF: $1s \pm 0.5s$


Monitored voltage

ON: Phase-Neutral OFF: Phase-Phase


Measuring range				
SW3	ON	ON	OFF	OFF
SW4	ON	OFF	ON	OFF
M23 Ph-Ph Voltage	208 VAC	220 VAC	230 VAC	240 VAC
M48 Ph-Ph Voltage	380 VAC	400 VAC	415 VAC	480 VAC
M48 Ph-N Voltage	220 VAC	230 VAC	240 VAC	277 VAC

Wiring Diagrams



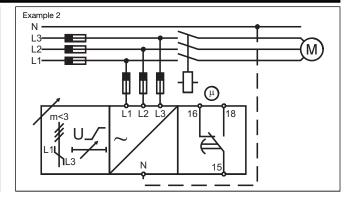

Operation Diagrams

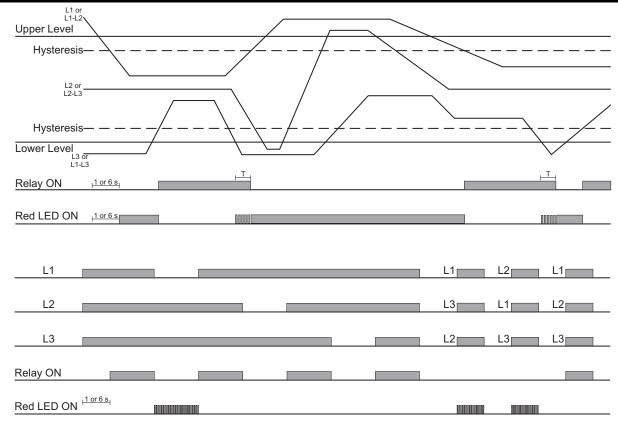

Dimensions

