

Multifunction Timers Types DMB51

Product Description

Multi-voltage timer with 7 knob-selectable functions and 7 knob-selectable time ranges within 0.1s and 100h. Housing 17.5 mm wide suitable for back and front panel mounting. Wide power supply range: 12 to 240 VAC/DC.

Property

- Selectable time range 0.1 s to 100 h
- 7 knob selectable functions:
 - Op - delay on operate
 - In - interval
 - Io - interval on trigger open
 - Id - double interval
 - Dr - delay on release
 - R - symmetrical recycler ON first
 - Rb - symmetrical recycler OFF first
- Automatic or manual start
- Repeatability: $\leq 0.2\%$
- Output: 5 A SPDT
- For mounting on DIN-rail in accordance with DIN/EN 50 022
- 17.5 mm DIN-rail housing (DIN 43880)
- Combined AC and DC power supply
- LED indication for relay status and power supply ON

Type Selection

Mounting	Output	Housing	Supply:
DIN-rail	SPDT	Mini-D	12 to 240 VAC/DC

Supply Specifications

Power supply	Overvoltage cat. II
Rated operational voltage through terminals:	(IEC 60664, IEC 60038) 12 to 240 VDC + 10% -15% and 12 to 240 VAC + 10% -15%, 45 to 65 Hz
Voltage interruption	≤ 10 ms
Rated operational power	AC supply: 4 VA DC supply: 1.5 W

General Specifications

Power ON delay	≤ 100 ms
Indication for	
Power supply ON	LED, green
Output relays ON	LED, yellow (flashing when timing)
Environment	(EN 60529)
Degree of protection	IP 20
Pollution degree	2 (IEC 60664)
Operating temperature	-20° to +60°C, R.H. < 95%
Storage temperature	-30° to +80°C, R.H. < 95%
Housing	
Dimensions	17.5 x 81 x 67.2 mm
Material	PA66
Weight	75 g
Screw terminals	
Tightening torque	Max. 0.5 Nm according to IEC EN 60947
Approvals	UL, CSA RINA
CE Marking	Yes
EMC	
Immunity	Electromagnetic Compatibility According to EN 61000-6-2
Emissions	According to EN 61000-6-3



Output Specifications

Output	SPDT
Rated insulation voltage	250 VAC (rms)
Contact Ratings (AgSnO₂)	μ
Resistive loads	AC 1 5 A @ 250 VAC DC 12 5 A @ 24 VDC
Small inductive loads	AC 15 2.5 A @ 250 VAC DC 13 2.5 A @ 24 VDC
Mechanical life	$\geq 30 \times 10^6$ operations
Electrical life	$\geq 10^5$ operations (at 5 A, 250 V, $\cos \varphi = 1$)
Operating frequency	< 7200 operations/h
Dielectric strength	
Dielectric voltage	2 kVAC (rms)
Rated impulse withstand voltage	2.5 kV (1.2/50 μ s)

Time Specifications

Time ranges	
Knob selectable	0.1 to 1 s ,1 to 10 s 6 to 60 s ,60 to 600 s 0.1 to 1 h ,1 to 10 h 10 to 100 h
Setting accuracy	$\leq 5\%$
Repeatability	$\leq 0.2\%$
Time variation	
Within rated power supply	$\leq 0.05\%/V$
Within ambient temperature	$\leq 0.2\%/^{\circ}C$
Reset	
Manual reset of time and/or relay	Close the trigger contact between pins A1 and Y1
Pulse duration	≥ 100 ms
Power supply interruption	≥ 200 ms
Automatic start	Connect pins A1 and Y1

Time Setting

Upper knob: Setting of function: Op - delay on operate In - interval Io - interval on trigger open Id - double interval Dr - delay on release R - symmetrical recycler (ON first) Rb - symmetrical recycler (OFF first)	Centre knob: Time setting on relative scale: 1 to 10 with respect to the chosen range. Lower knob: Setting of time range
--	---

Mode of Operation

**Function Op
Delay on operate**
The time period begins as soon as the trigger contact is closed.
At the end of the set delay time the relay operates and does not release until the trigger contact is closed again or the power supply is disconnected. If the trigger contact is closed before the end of the delay time, the device resets and a new time period starts.

**Function In
Interval**
The relay operates and the time period begins as soon as the trigger contact is closed. The relay releases at the end of this period or when the power supply is disconnected. The relay operates again when the trigger contact is closed again. If the trigger contact is closed before the end of the delay time, the device resets and a new time period starts.

**Function Io
Interval on trigger open**
The relay operates and the time period begins as soon as the trigger contact is opened. At the end of the set delay or when the power supply is disconnected the relay releases. The relay operates again when the trigger contact is opened again. If the trigger contact is opened before the end of the delay time the relay keeps ON and a new time period begins.

**Function Id
Double interval**
The relay operates and the time period begins as soon as the trigger contact is closed. The relay releases at the end of this period or when the power supply is disconnected. When the trigger contact is opened the relay operates again for the set delay period. If the trigger contact is opened before the end of the first time period the second one begins; if the trigger contact is closed before the end of the second time period the device resets and the first time period begins again.

**Function Dr
Delay on release**
The relay operates as soon as the trigger contact is closed. The time period begins when the trigger contact is opened. The relay releases at the end of the set delay time or when the power supply is disconnected. The relay operates again when the input contact is closed again. If it is opened before the end of the delay time the relay keeps ON, a new time period begins as soon as the contact is closed again.



**Function R
Symmetrical recycler, ON-time period first**
The relay operates and the time period begins as soon as the input contact is closed. After the set delay period the relay releases for the same time period. This sequence continues with equal ON- and OFF-time periods until the power supply is interrupted.

**Function Rb
Symmetrical recycler, OFF-time period first**
The time period begins as soon as the input contact is closed. The relay is OFF during the set delay period, after this time it operates for the same time period. This sequence continues with equal OFF- and ON-time periods until the power supply is interrupted.








Additional Load
It's possible to wire an additional load (i.e. a relay) between pins Y1 and A2, driven by the trigger contact without damaging the device.

Yellow LED working mode
Timing: Slow blinking
Relay ON: See operation diagrams
Incorrect knobs position: Fast blinking


Operating Diagrams

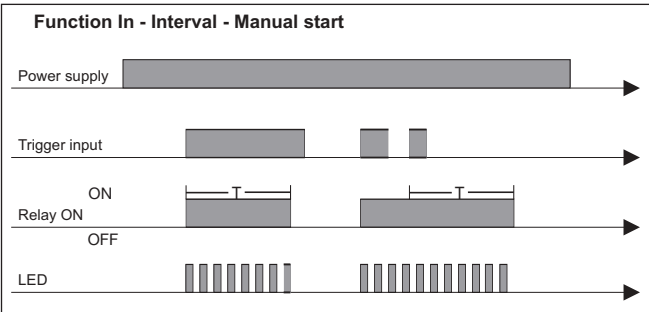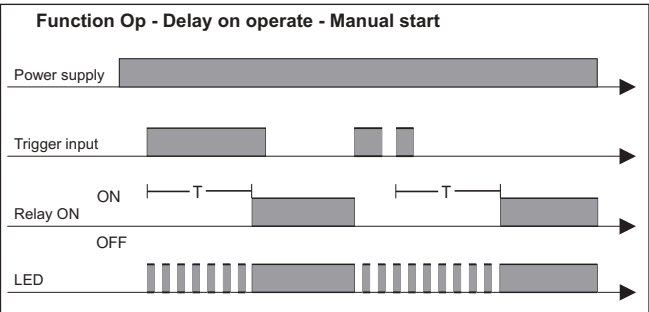

Operating Diagrams (cont.)

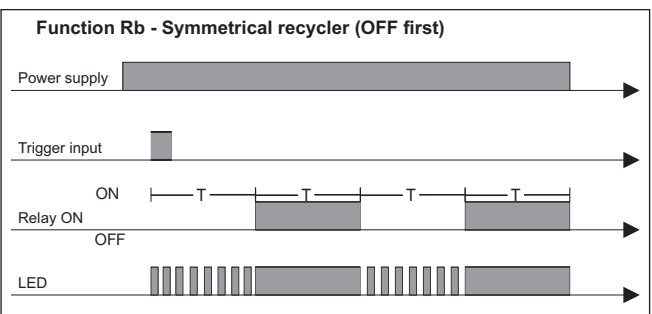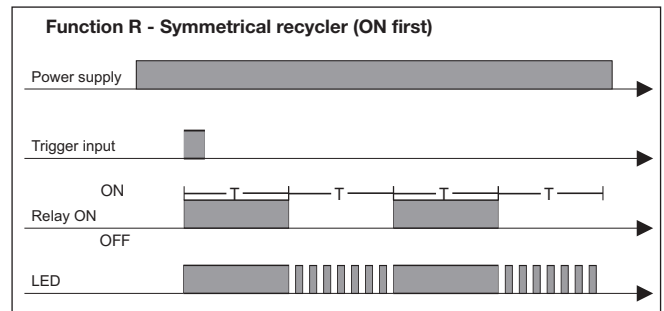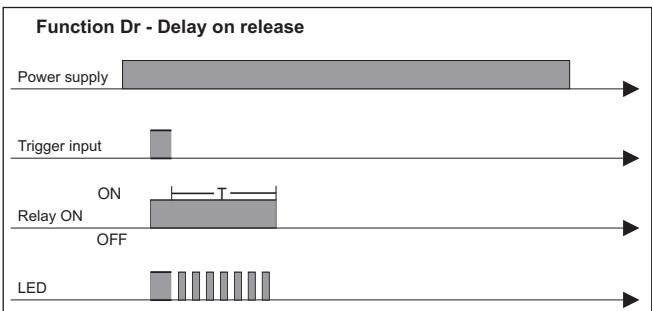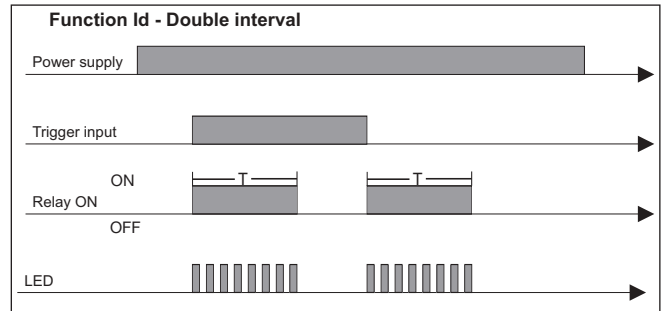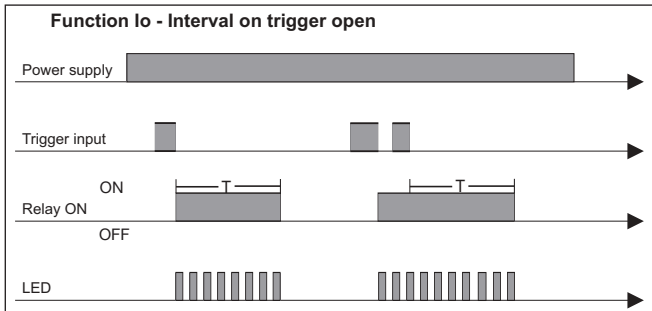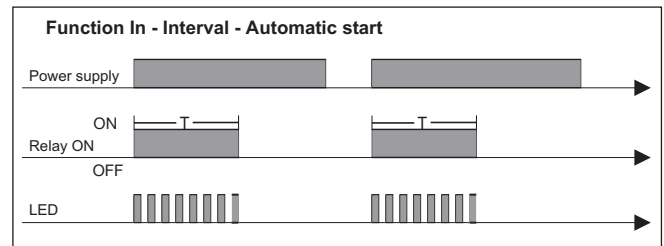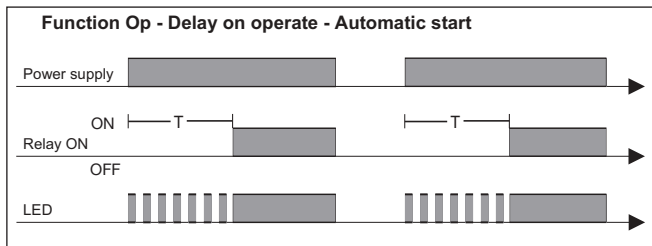

Wiring Diagram

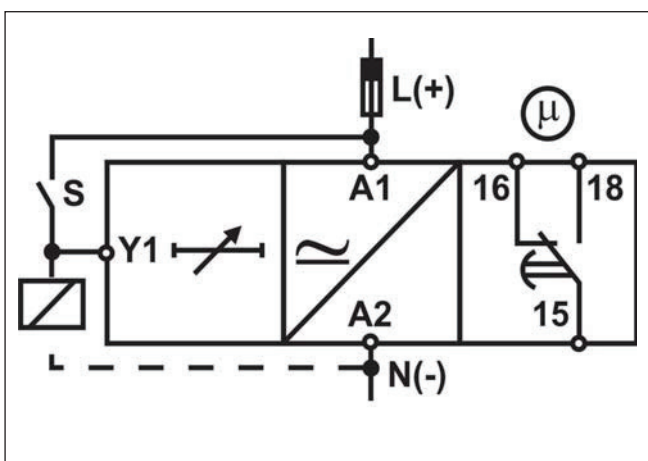

Dimensions

