





#### **FEATURES**

- RoHS compliant
- UL60950 recognized
- Power density 0.42W/cm³
- Wide temperature performance at full 1 watt load, -40°C to 60°C
- Single and dual outputs
- UL 94V-0 package material
- No heatsink required
- Footprint 1.91cm<sup>2</sup>
- SIP package style
- 5.2kVDC isolation
- 3V, 5V & 12V input
- 3V, 5V, 9V, 12V and 15V output
- Internal SMD construction
- Fully encapsulated with toroidal magnetics
- Pin compatible with the NMV series SIP DC/DC converters
- MTTF up to 13 million hours
- Custom solutions available

# **PRODUCT OVERVIEW**

The NMJ series are dual and single output DC/DC converters in a 7 pin SIP package style offering pin and functionality compatibility with the NMV series SIP DC/DC converters. The NMJ series is UL60950 recognized and suitable for applications where safety and miniaturisation are of paramount importance. Isolation barrier approved for supplementary/reinforced insulation - see page 2.







SELECTION GUIL	DE						
Order Code	Nominal Input Voltage	Output Voltage	Output Current	Ripple & Noise <sup>4</sup>	Efficiency (Min.)	Isolation Capacitance	MTTF <sup>1</sup>
	V	V	mA	mV p-p	%	pF	kHrs
NMJ0505SC	5	±5	±100	40	60	3.0	4950
NMJ0509SC	5	±9	±55	30	65	3.0	3832
NMJ0512SC	5	±12	±42	20	65	3.0	2770
NMJ0515SC	5	±15	±33	20	65	3.0	1903
NMJ1205SC	12	±5	±100	40	60	3.0	3688
NMJ1209SC	12	±9	±55	30	65	3.0	3029
NMJ1212SC	12	±12	±42	20	65	3.0	2324
NMJ1215SC	12	±15	±33	20	65	3.0	1682
NMJ0303SAC	3.3	3.3	303	70	66	3.0	13780
NMJ0503SAC	5	3.3	303	60	64	3.0	13460
NMJ0505SAC	5	5	200	50	68	3.0	13360
NMJ0509SAC	5	9	111	50	72	3.0	12700
NMJ0512SAC	5	12	83	50	71	3.0	11490
NMJ0515SAC	5	15	66	50	71	3.0	9980
NMJ1205SAC	12	5	200	50	69	3.0	8447
NMJ1209SAC	12	9	111	50	73	3.0	8176
NMJ1212SAC	12	12	83	50	73	3.0	7660
NMJ1215SAC	12	15	66	50	74	3.0	6950
When operated with a	additional extern	al load capacitar	ce the rise time	of the input volta	age will determin	ne the maximum e	external

capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

INPUT CHARACTE	RISTICS				
Parameter	Conditions	Min.	Тур.	Max.	Units
	Continuous operation, 3V input types	2.97	3.3	3.63	
Voltage range	Continuous operation, 5V input types	4.5	5	5.5	V
	Continuous operation, 12V input types	10.8	12	13.2	

<b>OUTPUT CHARACTERIST</b>	rics					
Parameter	Conditions	Min.	Тур.	Max.	Units	
Rated Power <sup>2</sup>	T <sub>A</sub> =-40°C to 60°C			1	W	
Voltage Set Point Accuracy	See tolerance envelopes					
Line regulation	High Vin to low Vin		1.0	1.2	%/%	
Load regulation Single outputs	10% load to rated load, xx03		10.0	15.0	%	
	10% load to rated load, 0505		7.0	10.0		
	10% load to rated load, 0509, 0512, 0515		6.0	10.0		
	10% load to rated load, 12xx		5.0	7.0		
	10% load to rated load, 5V output types		10.0	15.0		
Load regulation	10% load to rated load, 9V output types		6.0	10.0	%	
Dual outputs	10% load to rated load, 12V output types		6.0	10.0		
	10% load to rated load, 15V output types		6.0	10.0		
Zero Load Power Consumption	All types		250		mW	

ABSOLUTE MAXIMUM RATINGS	
Short-circuit protection <sup>3</sup>	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Input voltage V <sub>IN</sub> , NMJ03 types	5V
Input voltage V <sub>IN</sub> , NMJ05 types	7V
Input voltage V <sub>IN</sub> , NMJ12 types	15V

- 1. Calculated using MIL-HDBK-217 FN2 calculation model with nominal input voltage at full load.
- See derating graph.
   Supply voltage must be discontinued at the end of the short circuit duration.
- 4. See ripple & noise test method.


  All specifications typical at T<sub>A</sub>=25°C, nominal input voltage and rated output current unless otherwise specified.





<b>ISOLATION CHARACTERI</b>	STICS				
Parameter	Conditions	Min.	Тур.	Max.	Units
Isolation test voltage	Flash tested for 1 second	5200			VDC
Resistance	Viso= 500VDC		1		GΩ

GENERAL CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Curitahing fraguanay	Single output		45		kHz
Switching frequency	Dual output		70		КПZ

TEMPERATURE CHARACTERIS	RITICS				
Parameter	Conditions	Min.	Тур.	Max.	Units
Specification	All output types	-40		60	
Storage		-55		130	°C
Case Temperature above ambient	All output types			33	
Cooling	Free air convection				







### **TECHNICAL NOTES**

#### **ISOLATION VOLTAGE**

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NMJ series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 5.2kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

The NMJ series has been recognized by Underwiters Laboratory to 300Vrms for Supplementary Insulation and 150Vrms for Reinforced Insulation.

#### REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

#### **SAFETY APPROVAL**

The NMJ series has been recognised by Underwriters Laboratory (UL) to UL 60950 for supplementary insulation up to 300Vrms and reinforced insulation up to 150Vrms at a maximum ambient temperature of 60°C. File number E179522 applies.

#### **ROHS COMPLIANCE INFORMATION**



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish on this product series is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The series is backward compatible with Sn/Pb soldering systems.

For further information, please visit www.murata-ps.com/rohs




#### **OUTPUT RIPPLE REDUCTION**

By using the values of inductance and capacitance stated, the output ripple at the rated load is lowered to 5mV p-p max.


#### **Component selection**

Capacitor: It is required that the ESR (Equivalent Series Resistance) should be as low as possible, ceramic types are recommended. The voltage rating should be at least twice (except for 15V output), the rated output voltage of the DC/DC converter.

Inductor: The rated current of the inductor should not be less than that of the output of the DC/DC converter. At the rated current, the DC resistance of the inductor should be such that the voltage drop across the inductor is <2% of the rated voltage of the DC/DC converter. The SRF (Self Resonant Frequency) should be >20MHz.




	Inductor			Capacitor		
	L, μH	Through Hole	SMD	C, μF	Size	V rating, V
3.3V single output types		Consult Factory				
5V single output types		Consult Factory				
9V single output types		Consult Factory				
12V single output types	Consult Factory					
15V single output types	Consult Factory					



	Inductor					
	L, μH	Through Hole	SMD	C, µF	Size	V rating, V
5V dual output types	22	22R223C	82223C	4.70	1206	10
9V dual output types		Consult Factory				
12V dual output types	68	22R224C	82224C	0.47	0805	25
15V dual output types			Consult Fac	tory		



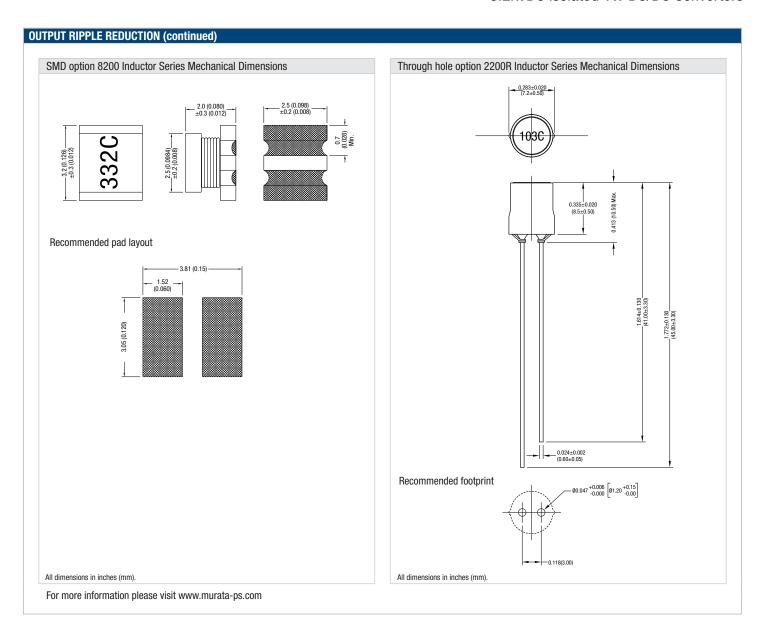



# CHARACTERISATION TEST METHODS


#### Ripple & Noise Characterisation Method

Ripple and noise measurements are performed with the following test configuration.

C1	1uF X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC/DC converter
C2	10uF tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC/DC converter with an ESR of less than $100 \text{m}\Omega$ at $100 \text{ kHz}$
C3	100nF multilayer ceramic capacitor, general purpose
R1	$450\Omega$ resistor, carbon film, +/-1% tolerance
R2	$50\Omega$ BNC termination
T1	3T of the coax cable through a ferrite toroid
RLOAD	Resistive load to the maximum power rating of the DC/DC converter. Connections should be made via twisted wires
R3	50Ω resistor, carbon film, +/-1%

Measured values are multiplied by 10 to obtain the specified values.

# Differential Mode Noise Test Schematic

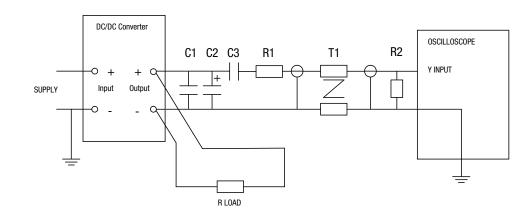

 $+V_{\text{IN}}$ 

-VIN


-Vout


 $+V_{\text{OUT}}$ 




# 5.2kVDC Isolated 1W DC/DC Converters

# PACKAGE SPECIFICATIONS MECHANICAL DIMENSIONS 0.77 (19.50) 0.39 0.49 (12.50) 0.18 (4.60) 6\* 0.022(0.55)0.14 (3.60) 0.018 (0.45) 0.022 (0.55) 0.1 (2.54) 0.018 (0.45) Weight: 4.3a 0.094 (2.40) 0.012 (0.30) 0.008 (0.20) -0.074±0.03 (1.88±0.75) All dimensions in inches $\pm 0.01$ (mm $\pm 0.25$ mm). All pins on a 0.1 (2.54) pitch and within $\pm 0.01$ (0.25) of true position. \* Pin not fitted on single output variants.



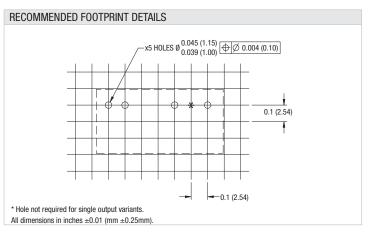

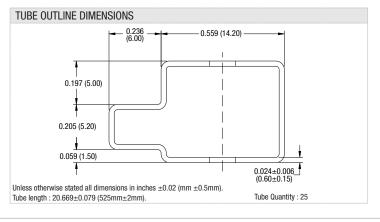

# muRata Ps Murata Power Solutions

Murata Power Solutions. Inc.

11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356

www.murata-ps.com email: sales@murata-ps.com ISO 9001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2008 Murata Power Solutions, Inc. USA: Mansfield (MA), Tel: (508) 339-3000, email: sales@murata-ps.com Canada: Toronto, Tel: (866) 740 1232, email: toronto@murata-ps.com

UK: Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com

Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com France:

Germany: München, Tel: +49 (0)89-544334-0, email: munich@murata-ps.com

Tokyo, Tel: 3-3779-1031, email: sales\_tokyo@murata-ps.com Japan: Osaka, Tel: 6-6354-2025, email: sales\_osaka@murata-ps.com

Website: www.murata-ps.jp

China: Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com

Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com