

# Monitoring Relays

## 1-Phase AC/DC Over Voltage - AC Over Current

### Types DUA01, PUA01



- AC/DC over voltage monitoring relay
- Selection of measuring range by DIP-switches
- Measuring ranges: 2 to 20 VAC/DC, 5 to 50 VAC/DC, 20 to 200 VAC/DC, 50 to 500 VAC/DC, 0.4 to 4 V<sub>p</sub> AC
- Adjustable voltage limit on relative scale
- Adjustable hysteresis
- Programmable latching at set level
- Output: 8 A SPDT relay normally de-energized
- For mounting on DIN-rail in accordance with DIN/EN 50 022 (DUA01) or plug-in module (PUA01)
- 22.5 mm Euronorm housing (DUA01) or 36 mm plug-in module (PUA01)
- LED indication for relay and power supply ON
- Galvanically separated power supply


### Product Description

DUA01 and PUA01 are precise AC/DC over voltage monitoring relays. They can also be used as 1-phase or 3-phase over current monitoring relays when connected with MI or MP current transformers.

Owing to the built-in latch function, the ON-position of the relay output can be maintained. The red LED indicates the alarm status.

### Ordering Key

**DUA 01 C B23 500V**

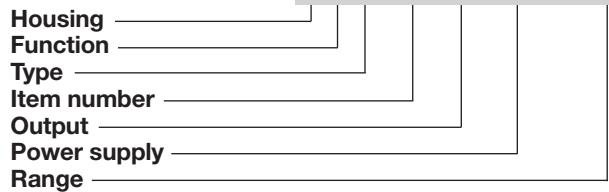

### Type Selection

Mounting	Output	Supply: 24 VDC	Supply: 48 VDC	Supply: 24/48 VAC	Supply: 115/230 VAC
DIN-rail	SPDT	<b>DUA 01 C 724 500V</b>	<b>DUA 01 C 748 500V</b>	<b>DUA 01 C B48 500V</b>	<b>DUA 01 C B23 500V</b>
Plug-in	SPDT	<b>PUA 01 C 724 500V</b>	<b>PUA 01 C 748 500V</b>	<b>PUA 01 C B48 500V</b>	<b>PUA 01 C B23 500V</b>

### Input Specifications

<b>Input</b> (voltage level)	DUA01: Terminals Y1, Y2 PUA01: Terminals 5, 7	
<b>Measuring ranges</b>	<b>Int. resist.</b>	<b>Max. volt.</b>
Direct		
Selectable by DIP-switches		
2 to 20 VAC/DC	> 500 kΩ	600 V
5 to 50 VAC/DC	> 500 kΩ	600 V
20 to 200 VAC/DC	> 500 kΩ	600 V
50 to 500 VAC/DC	> 500 kΩ	600 V
0.4 to 4 V <sub>p</sub> AC	> 500 kΩ	600 V
MI and MP CT ranges	<b>AAC rms</b>	<b>Max. curr.</b>
1-ph.:		
3-ph.:		
MI 5	0.5 to 5 A	20 AAC
MP 3005		
MI 20	2 to 20 A	50 AAC
MP 3020		
MI 100	10 to 100 A	250 AAC
MP 3100		
MI 500	50 to 500 A	750 AAC
MP 3500		
<b>Note:</b>	The input voltage cannot raise over 300 VAC/DC with respect to ground (PUA01 only)	
<b>Contact input</b>	Terminals Z1, Y1 Terminals 8, 9	
DUA01		
PUA01		
Disabled	> 10 kΩ	
Enabled	< 500 Ω	
Latch disable	> 500 ms	

### Output Specifications

<b>Output</b>	SPDT relay
Rated insulation voltage	250 VAC
<b>Contact ratings</b> (AgSnO <sub>2</sub> )	μ
Resistive loads	AC 1
	DC 12
Small inductive loads	AC 15
	DC 13
<b>Mechanical life</b>	≥ 30 x 10 <sup>6</sup> operations
<b>Electrical life</b>	≥ 10 <sup>5</sup> operations (at 8 A, 250 V, cos φ = 1)
<b>Operating frequency</b>	≤ 7200 operations/h
<b>Dielectric strength</b>	
Dielectric voltage	≥ 2 kVAC (rms)
Rated impulse withstand volt.	4 kV (1.2/50 μs)

## Supply Specifications

<b>Power supply</b> Rated operational voltage through terminals: A1, A2 or A3, A2 (DUA01) 2, 10 or 11, 10 (PUA01) 724: 748: B48: B23:	Overvoltage cat. III (IEC 60664, IEC 60038)  24 VDC ± 20%, insulated 48 VDC ± 20%, insulated 24/48 VAC ± 15% 45 to 65 Hz, insulated 115/230 VAC ± 15% 45 to 65 Hz, insulated
<b>Dielectric voltage</b> Supply to input Supply to output Input to output	<b>DC supply</b> 2 kV 4 kV 4 kV <b>AC supply</b> 4 kV 4 kV 4 kV
<b>Rated operational power</b> AC DC	4 VA 2 W

## General Specifications

<b>Reaction time</b> Alarm ON delay  Alarm OFF delay	< 100 ms (voltage rising from -20% to +20% set value) < 300 ms (voltage decreasing from +20% to -20% set value)
<b>Accuracy</b> Temperature drift Repeatability	(15 min warm-up time) ± 1000 ppm/°C ± 0.5% on full-scale
<b>Indication for</b> Power supply ON Output relay ON	LED, green LED, red
<b>Environment</b> Degree of protection Pollution degree Operating temperature Storage temperature	(EN 60529) IP 20 3 (DUA01), 2 (PUA01) -20 to 60°C, R.H. < 95% -30 to 80°C, R.H. < 95%
<b>Housing dimensions</b> DIN-rail version Plug-in version	22.5 x 80 x 99.5 mm 36 x 80 x 94 mm
<b>Weight</b>	Approx. 150 g
<b>Screw terminals</b> Tightening torque	Max. 0.5 Nm acc. to IEC 60947
<b>Approvals</b>	UL, CSA (except 748)
<b>CE Marking</b>	Yes
<b>EMC</b> Immunity Emission	Electromagnetic Compatibility According to EN 61000-6-2 According to EN 61000-6-3

## Mode of Operation

DUA01 and PUA01 monitor both AC and DC over voltage. When connected with MI or MP current transformer (using the 0.4 - 4 V<sub>p</sub> range) they can monitor 1-phase or 3-phase AC currents up to 500 A.

### Example 1

(connection between terminals Z1, Y1 or 8, 9 - latch function enabled)

The relay operates and latches in operating position when the measured value exceeds the set level. Provided that the voltage has dropped min. 4% below the set point (see hysteresis), the relay releases when the interconnection between terminals Z1, Y1 or 8, 9 is interrupted or the power supply is interrupted as well.

### Example 2 (MI CT)

(no connection between terminals Z1, Y1 or 8, 9)

The relay operates when the current flowing through the CT exceeds the set level. It releases when the current drops min. 4% below the set level (see hysteresis) or when power supply is interrupted.

### Example 3 (MP CT)

(no connection between terminals Z1, Y1 or 8, 9 - latch function disabled)

The relay operates when the maximum current flowing through the CT exceeds the set level. It releases when the maximum current drops min. 4% below the set level (see hysteresis) or when power supply is interrupted.

## Range - Level Setting

Adjust the measuring range setting the DIP switches 1 to 4 as shown below. To access the DIP switches open the grey plastic cover using a screwdriver as shown below.

### Centre knob:


Setting of voltage on relative scale: from 10 to 110% of the full-scale value.

### Hysteresis:

Approx. 4% of set value, it can be extended by inserting a resistor between terminals Z1, Y1 or 8, 9.



### Approx. resistor values:

10%: 180 kΩ  
25%: 47 kΩ  
50%: 22 kΩ  
75%: 15 kΩ  
Latch: < 500 Ω





0V ←	1	2	3	4	<b>Measuring range</b>
	OFF	ON	OFF	OFF	0.4 to 4 V <sub>p</sub>
	ON	OFF	OFF	OFF	2 to 20 VAC/DC
	OFF	OFF	OFF	OFF	5 to 50 VAC/DC
	ON	OFF	ON	OFF	20 to 200 VAC/DC
	ON	OFF	OFF	ON	50 to 500 VAC/DC

## Wiring Diagrams

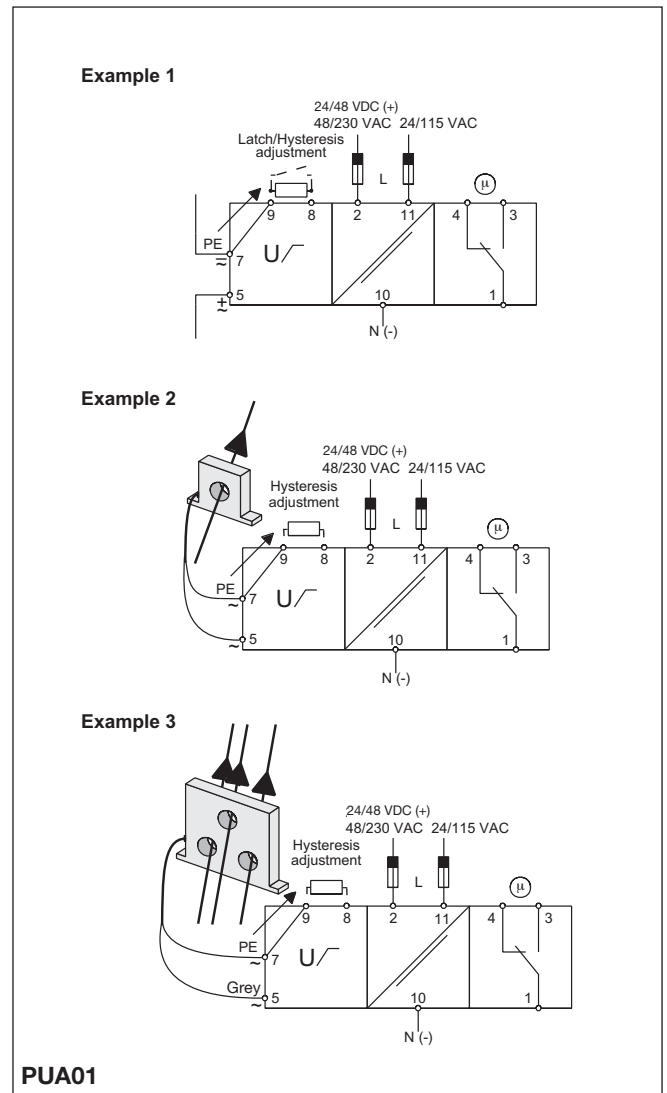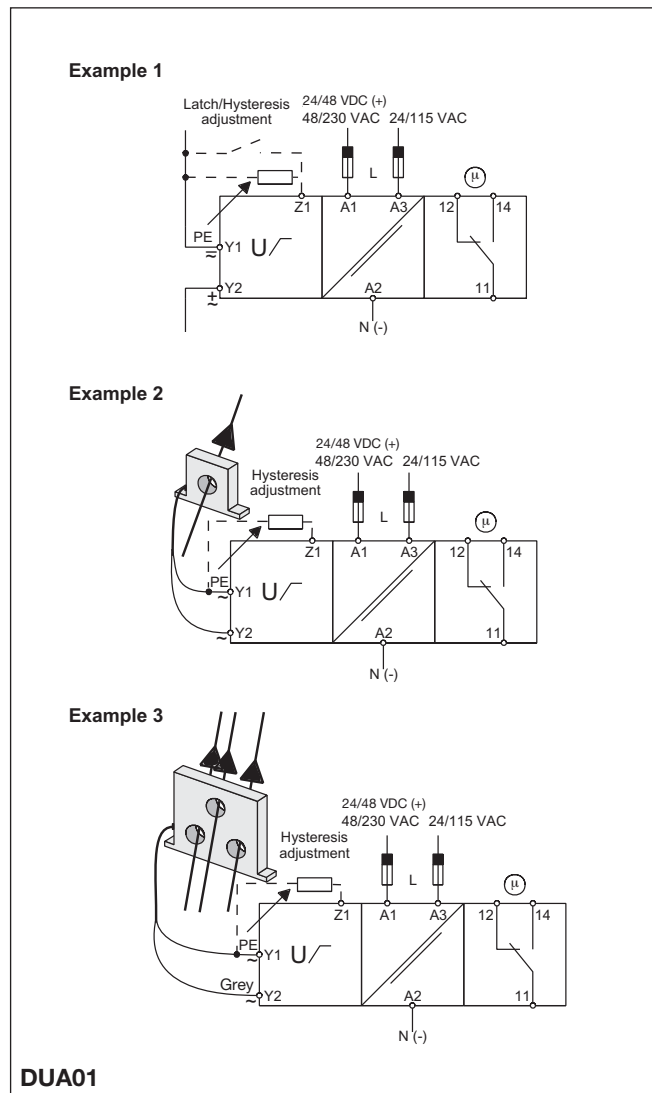

## Operation Diagrams

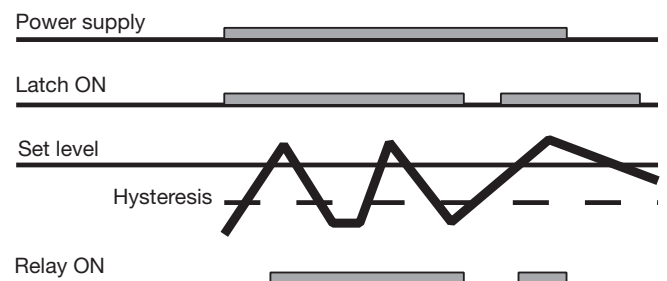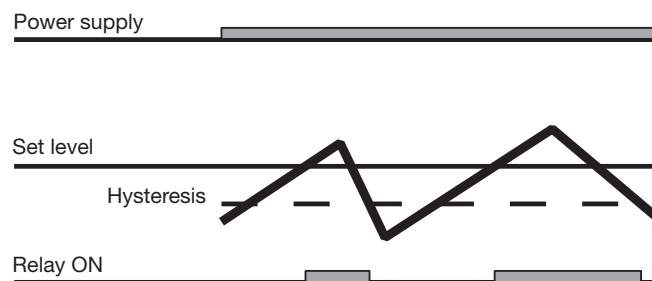

## Dimensions

