


## Lamp Life Timer GDT-9000

- Input Power : AC85~265V.
- Default Display: Lamp Operating Hours, Up to 9000 hours.  
Total Running Days, Up to 9,999 days.
- End of Lamp Life Alarm, Resettable
- Lamp No.1 ~ No.12 Operation LED Indicators : Green Normal Operating, Audible Lamp Failure with Red



## 4-segment Visual Display


- Default Display: Lamp Operating Hours, Up to 9000 hours. Example : Lamp Operating 200 hours

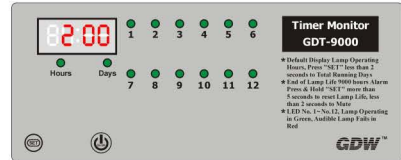

- Equipment Total Running Days : Press "  " less than 2 seconds to display. Then Press

"  " button again or more than 10 seconds will return Default

Example : Equipment Total Running 33 days

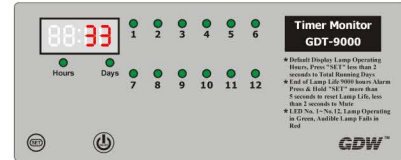

## End of Lamp Life (Default 9000 hours)

Screen Display "9000" hours Blinking , Alarm and Relay is activated., Press "  " button less than 2 seconds to mute but the relay is still activated until reset

**Reset :** Press and Hold  for 5 Seconds, Reset Lamp Operating Hours to 0 hour

