



- 产品特点
- CHCS-0.66K 系列开口式电流互感器主要应用于工业中城网、农网改造项目，安装方便，无须拆一次母线，亦可带电操作，不影响客户正常用电，为用户改造项目节省人力、物力、财力，提高效率。该系列电流互感器可与继电器保护、测量以及计量装置配套使用。

- 型号说明

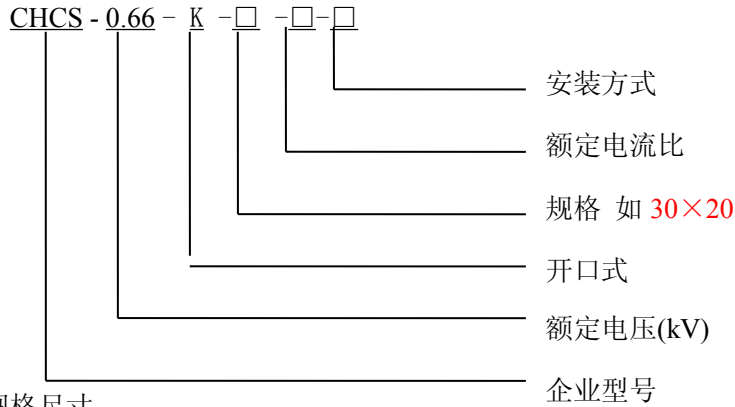

- 规格尺寸

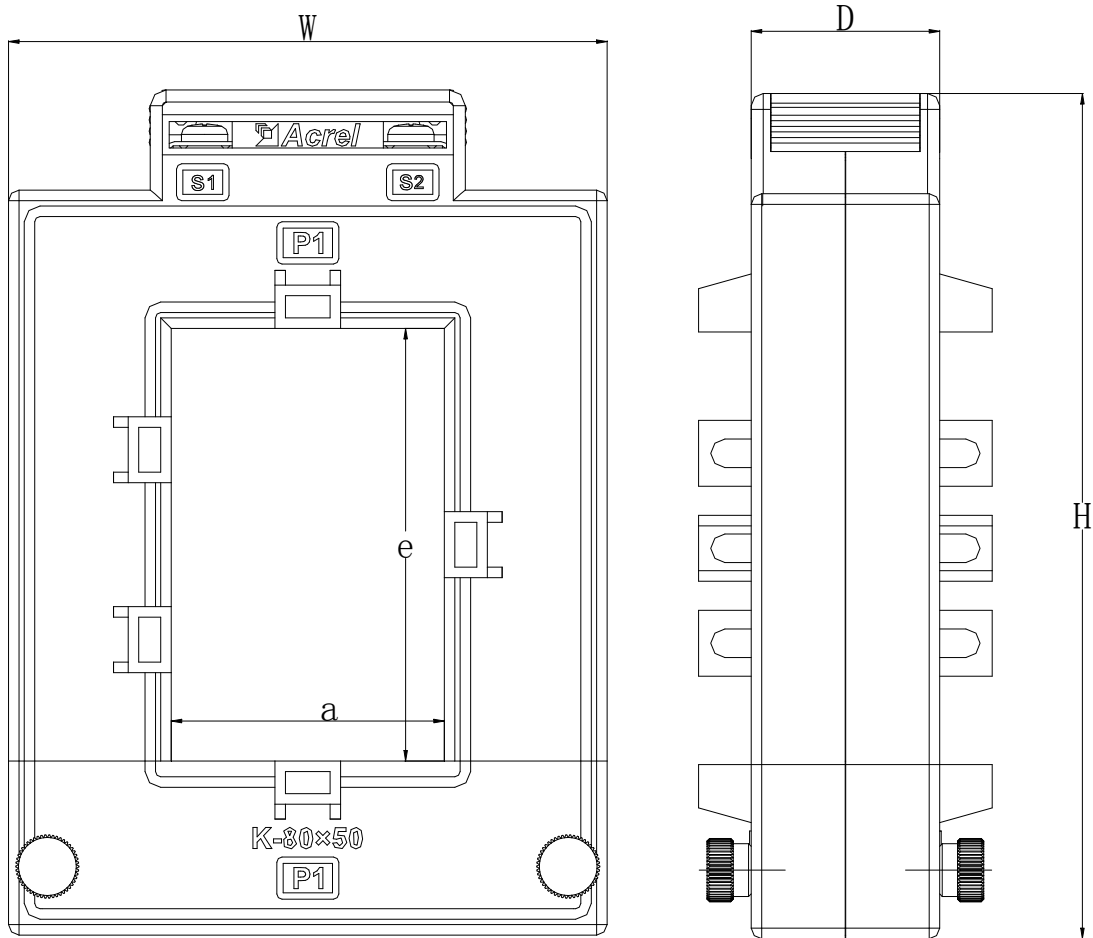

规格型式 \ 尺寸	外形尺寸			穿孔尺寸		备注	
	W	H	D	a	e	规格 (A)	质量 (kg)
K-30×20	90	114	40	22	32	20-400	0.8-0.9
K-80×50	114	159	36	52	82	250-1000	1.25-1.4
K-80×80	144	159	36	82	82	250-1000	1.3-1.5
K-120×80	144	199	36	82	122	500-1500	1.6-1.8
K-120×60	164	214	52	62	122	300-3000	1.6-1.8
K-160×80	184	254	52	82	162	1000-5000	2.8-3.7
K-200×80	184	294	52	82	202	1000-5000	3.5-4.5

规格参数对照表



型 号	额定电流比(A)	准确级	额定负荷 (VA)
K-30×20	100-150A/5A	1.0	1.0
	200-300 A/5A	0.5	1.5
	400 A/5A	0.5	2.5
K-80×50	250-300 A/5A	1	1.5
	400 A/5A	0.5	1.5
	500-800 A/5A	0.5	2.5
	1000 A/5A	0.5	5
K-80×80	250-300 A/5A	1	1.5
	400 A/5A	0.5	1.5
	500-800 A/5A	0.5	2.5
	1000 A/5A	0.5	5
K-120×80	500-800 A/5A	0.5	2.5
	1000-1200 A/5A	0.5	5
	1250-1500 A/5A	0.5	7.5
K-120×60	300-400A/5A	0.5	2.5
	400A/5A	0.5	2.5
	500A/5A	0.5	3.75
	600-800A/5A	0.5	5.0
	1000-1250A/5A	0.5	7.5
	1500-1600A/5A	0.5	10
	2000-3000A/5A	0.2	15
K-160×80	1000 A/5A	0.5	10
	1500 A/5A	0.5	15
	2000-2500 A/5A	0.2	15
	3000-5000 A/5A	0.2	20
K-200×80	1000 A/5A	0.5	10
	1500 A/5A	0.5	15
	2000-2500 A/5A	0.2	15
	3000-5000 A/5A	0.2	20

规格参数对照表



型 号	额定电流比(A)	准确级	额定负荷(Ω)
K-30×20	20-30A/1A	1.0	0.1
	40-70A/1A	1.0	0.4
	100-150A/1A	1.0	1.0
	200-300 A/1A	0.5	1.5
	400 A/1A	0.5	2.5
K-80×50	250-300 A/1A	1	1.5
	400 A/1A	0.5	1.5
	500-800 A/1A	0.5	2.5
	1000 A/1A	0.5	5
K-80×80	250-300 A/1A	1	1.5
	400 A/1A	0.5	1.5
	500-800 A/1A	0.5	2.5
	1000 A/1A	0.5	5
K-120×80	500-800 A/1A	0.5	2.5
	1000-1200 A/1A	0.5	5
	1250-1500 A/1A	0.5	7.5
K-120×60	300-400A/1A	0.5	2.5
	400A/1A	0.5	2.5
	500A/1A	0.5	3.75
	600-800A/1A	0.5	5.0
	1000-1250A/1A	0.5	7.5
	1500-1600A/1A	0.5	10
	2000-3000A/1A	0.2	15
K-160×80	1000 A/1A	0.5	10
	1500 A/1A	0.5	15
	2000-2500 A/1A	0.2	15
	3000-5000 A/1A	0.2	20
K-200×80	1000 A/1A	0.5	10
	1500 A/1A	0.5	15
	2000-2500 A/1A	0.2	15
	3000-5000 A/1A	0.2	20