

SLIMLINE LAMP WITH ON/OFF SWITCH

SL 025



- > Slim casing
- > Electronic ballast
- > Lamp without/with electrical socket (choice of sockets)
- > Magnet fixing (option)
- > Energy saving lamp
- > On/Off switch

The flat slimline lamp SL 025 is suitable for all types of panels and enclosures, especially where space is at a premium. The lamp can be mounted on its narrow or broad surface using screws. It is also available with a magnet which allows it to be fitted quickly in any position in a steel enclosure. Both versions are available with an integrated electrical socket enabling the use of additional appliances.


Photo: Slimline lamp with on/off switch, with integrated electric socket (Germany), Art. No. 02520.0-00



TECHNICAL DATA

Power consumption	11W
Luminosity	900Lm (equals 75W light bulb)
Lamp type	energy saving lamp, 2G7 socket
Service life	10,000h
Switch	on/off light switch
Connection	terminal 2.5mm ² with cable clamp, torque 0.8Nm max.
Mounting	screw fixing, M5, 300mm centers magnet fixing (optional)
Casing	plastic according to UL94 V-0, light grey
Dimensions	345 x 91 x 40mm
Fitting position	narrow surface/broad surface
Operating/Storage temperature	-20 to +50°C (-4 to +122°F) / -45 to +70°C (-49 to +158°F)
Operating/Storage humidity	max. 90% RH (non-condensing)
Protection type	IP20

Note: The slimline lamp SL 025 is also available with a 19" front panel, 24VDC to 48VDC on request

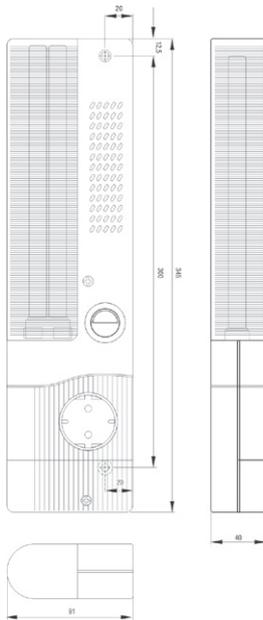

Art. No.	Model	Operating voltage	Socket	Nominal current	Weight (approx.)	Protection class	Approvals
02520.0-00	without magnet	230VAC, 50/60Hz	Germany/Russia (1)	16.0A	0.4kg	I (earthed)	VDE
02520.1-01	with magnet	230VAC, 50/60Hz	Germany/Russia (1)	16.0A	0.5kg	I (earthed)	VDE
02521.0-00	without magnet	230VAC, 50/60Hz	F/PL/CZ/SK (2)	16.0A	0.4kg	I (earthed)	VDE
02521.1-04	with magnet	230VAC, 50/60Hz	F/PL/CZ/SK (2)	16.0A	0.5kg	I (earthed)	VDE
02522.0-00	without magnet	230VAC, 50/60Hz	Switzerland (3)	10.0A	0.4kg	I (earthed)	VDE
02522.1-01	with magnet	230VAC, 50/60Hz	Switzerland (3)	10.0A	0.5kg	I (earthed)	VDE
02523.0-00	without magnet	230VAC, 50/60Hz	UK/Ireland (4)	13.0A	0.4kg	I (earthed)	VDE
02523.1-05	with magnet	230VAC, 50/60Hz	UK/Ireland (4)	13.0A	0.5kg	I (earthed)	VDE
02524.0-01	without magnet	120VAC, 50/60Hz	USA/Canada (5)	15.0A	0.4kg	I (earthed)	UL File No. E234324
02524.1-05	with magnet	120VAC, 50/60Hz	USA/Canada (5)	15.0A	0.5kg	I (earthed)	UL File No. E234324
02527.0-00	without magnet	230VAC, 50/60Hz	none	-	0.4kg	II (double insulated)	VDE + UL File No. E234324
02527.1-14	with magnet	230VAC, 50/60Hz	none	-	0.5kg	II (double insulated)	VDE
02527.0-10	without magnet	120VAC, 50/60Hz	none	-	0.4kg	II (double insulated)	UL File No. E234324
02527.1-11	with magnet	120VAC, 50/60Hz	none	-	0.5kg	II (double insulated)	UL File No. E234324