

NLP110 Medical Series



Single and triple output

LOW TO MEDIUM POWER AC/DC POWER SUPPLIES

80-110 W AC/DC Universal Input Switch Mode Power Supplies

1

- Provides low voltage outputs
- Compliance to EN61000-3-2 (Power Factor = 0.98)
- Smallest industry standard package 6.5 x 3.0 x 1.26 inches
- 90 Vac to 264 Vac universal input range
- UL, cUL, and VDE safety approvals and CE-Marked to MDD
- Overvoltage and short circuit protection
- VDE0871-A, EN55022-A, EN55011-A conducted noise
- VDE0871-A, EN55022-A, EN55011-A radiated noise
- Meets all applicable and relevant immunity standards EN61000-4-2,4,5 and 6
- Available RoHS compliant



The NLP110 Medical is a series of 110 W ac-dc open-frame power supplies in a 3" x 6.5" x 1.26" package. The NLP110 Medical is power factor corrected to meet EN61000-3-2 and is available in single and multiple output models. The multiple output models have a capability that is unique to the power supply market - they can deliver equal amounts of current on multiple low voltage outputs to support designs that will span the industry transition from 5 V logic to 3.3 V logic. The NLP110 Medical is practically the same size as a 65 Watt 3" x 5" product, e.g. NLP65 Medical - the one difference is that the footprint is a mere 1.5 inches longer. The NLP110 Medical series, with full medical safety approval per UL2601-1, C22.2 No. 601.1-M90, VDE0750, IEC60601-1 and EN60601-1 and CE marked, greatly accelerating design-in time and reducing system compliance costs.



2 YEAR WARRANTY

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated

SPECIFICATIONS

OUTPUT SPECIFICATIONS

Total regulation (Line and load)	Main output Auxiliary outputs	±2.0% ±5.0%
Rise time	At turn-on	1.0 s, max.
Transient response	Main output 75% to 100% step at 0.1 A/μs	5.0% or 250 mV max. dev., 1 ms max. recovery to 1%
Temperature coefficient		±0.02%/°C
Overvoltage protection	Main outputs	125%, ±10%
Short circuit protection	Cyclic operation	Continuous
Minimum output current	Single and multiple	See table

INPUT SPECIFICATIONS

Input voltage range (See Note 6)	Universal input	90-264 Vac
Input frequency range		47-63 Hz
Input surge current (cold start)	120 Vac 230 Vac	18 A max. 35 A max.
Safety ground leakage current	230 Vac, 50 Hz	<100 μA
Input current	120 Vac @ 80 W 120 Vac @ 110 W 230 Vac @ 80 W 230 Vac @ 110 W	0.9 A rms 1.3 A rms 0.48 A rms 0.7 A rms
Input fuse	UL/IEC127	F3.15A H, 250 Vac

EMC CHARACTERISTICS (12)

Conducted emissions	EN55022, FCC part 15	Level A
Radiated emissions	EN55022, FCC part 15	Level A
Harmonic current emission correction	EN61000-3-2	Compliant
ESD air	EN61000-4-2	Level 3
ESD contact	EN61000-4-2	Level 3

EMC CHARACTERISTICS (continued)

Surge	EN61000-4-5	Level 3
Fast transients	EN61000-4-4	Level 3
Radiated immunity	EN61000-4-3	Level 3
Conducted immunity	EN61000-4-6	Level 3

GENERAL SPECIFICATIONS

Hold-up time	120 Vac, 60 Hz	16.7 ms @ 110 W
Efficiency	120 Vac, 80 W (-9905J)	75% min.
Isolation voltage	Input/output Input/chassis	4000 Vac 1500 Vac
Approvals and standards	EN60601-1, IEC60601-1, VDE0750, UL2601-1, C22.2 No. 601.1-M90	
Weight		283 g (10 oz)
MTBF (@ 25 °C)	MIL-HDBK-217F	220,000 hours min.

ENVIRONMENTAL SPECIFICATIONS (9)

Thermal performance	Operating ambient, (See derating curve) Non-operating 50 °C to 70 °C, ambient, convection cooled 0 °C to 50 °C, ambient, convection cooled 0 °C to 50 °C ambient, 150 LFM forced air Peak (0 °C to +50 °C, 60 s) (See Note 3)	0 °C to +50 °C -40 °C to +85 °C Derate to 50% load 80 W 110 W
Relative humidity	Non-condensing	5% to 95% RH
Altitude	Operating Non-operating	10,000 feet max. 30,000 feet max.
Vibration (See Note 8)	5-500 Hz	2.4 G rms peak
Shock	per MIL-STD-810E	516.4 Part IV

NLP110 Medical Series

Single and triple output



LOW TO MEDIUM POWER AC/DC POWER SUPPLIES

80-110 W AC/DC Universal Input Switch Mode Power Supplies

2

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

OUTPUT VOLTAGE	OUTPUT CURRENT				PEAK (4)	RIPPLE (5)	TOTAL REGULATION	MODEL NUMBERS (7,14,15)
	MIN (6)	MAX (1)	150 LFM (2)	300 LFM (3)				
+5 V	0.5 A	15 A	22 A	22 A	22 A	50 mV	±2.0%	NLP110-9905J
+12 V	0.3 A	6.4 A	9.2 A	9.2 A	11.5 A	120 mV	±2.0%	NLP110-9912J
+48 V	0 A	1.6 A	2.3 A	2.3 A	2.5 A	240 mV	±2.0%	NLP110-9917J
+24 V	0.2 A	3.2 A	4.6 A	4.6 A	6 A	240 mV	±2.0%	NLP110-9924J
+5 V (A)	0.5 A	13 A	16 A	18 A	18 A	50 mV	±2.0%	NLP110-9993J
+3.3 V (B)	0.2 A	13 A	16 A	20 A	20 A	50 mV	±2.0%	
+12 V	0 A	0.65 A	1 A	1 A	1 A	120 mV	±5.0%	
+3.3 V (A)	0.5 A	13 A	16 A	20 A	22 A	50 mV	±2.0%	NLP110-9994J
+2.5 V (B)	0.1 A	13 A	16 A	20 A	22 A	50 mV	±2.0%	
+12 V	0 A	0.65 A	1 A	1 A	1 A	120 mV	±5.0%	
+12 V (A)	0.2 A	6.5 A	8.5 A	8.5 A	10 A	1200 mV	±2.0%	NLP110-9995J
+3.3 V (B)	0.5 A	13 A	16 A	20 A	22 A	50 mV	±2.0%	
-12 V	0 A	0.65 A	1 A	1 A	1 A	120 mV	±5.0%	
+12 V (A)	0.2 A	6.5 A	8.5 A	8.5 A	10 A	120 mV	±2.0%	NLP110-9908J
+5 V (B)	0.2 A	13 A	16 A	18 A	22 A	50 mV	±2.0%	
-12 V	0 A	0.65 A	1 A	1 A	1 A	120 mV	±5.0%	

Notes

- Free air convection.
Multiple output units: maximum continuous output power not to exceed 80 W.
For -9993J; $I_{3.3V} = 13$ A max.; $I_{5.0V} = 13$ A max.; $I_{3.3V} + I_{5.0V} \leq 16$ A.
For -9994J; $I_{3.3V} = 13$ A max.; $I_{2.5V} = 13$ A max.; $I_{3.3V} + I_{2.5V} \leq 16$ A.
For -9995J; $I_{3.3V} = 13$ A max.; $I_{12V} = 6.5$ A max.; $I_{3.3V} + I_{12V} \leq 16$ A.
For -9908J; $I_{5.0V} = 13$ A max.; $I_{12V} = 6.5$ A max.; $I_{5.0V} + I_{12V} \leq 16$ A.
Single output units: maximum continuous output power not to exceed; 75 W on -9905J; 76.8 W on -9912J, -9924J, and -9917J.
- 150 LFM forced air cooling from L4 side.
Multiple output units: maximum continuous output power not to exceed 105 W.
For -9993J; $I_{3.3V} = 16$ A max.; $I_{5.0V} = 16$ A max.; $I_{3.3V} + I_{5.0V} \leq 20$ A.
For -9994J; $I_{3.3V} = 16$ A max.; $I_{2.5V} = 16$ A max.; $I_{3.3V} + I_{2.5V} \leq 20$ A.
For -9995J; $I_{3.3V} = 16$ A max.; $I_{12V} = 8.5$ A max.; $I_{3.3V} + I_{12V} \leq 20$ A.
For -9908J; $I_{5.0V} = 16$ A max.; $I_{12V} = 8.5$ A max.; $I_{5.0V} + I_{12V} \leq 20$ A.
Single output units: maximum continuous output power not to exceed 110 W for all models.
- 300 LFM forced air cooling from L4 side.
Multiple output units: maximum continuous output power not to exceed 110 W.
For -9993J; $I_{3.3V} = 20$ A max.; $I_{5.0V} = 18$ A max.; $I_{3.3V} + I_{5.0V} \leq 22$ A.
For -9994J; $I_{3.3V} = 20$ A max.; $I_{2.5V} = 20$ A max.; $I_{3.3V} + I_{2.5V} \leq 22$ A.
For -9995J; $I_{3.3V} = 20$ A max.; $I_{12V} = 8.5$ A max.; $I_{3.3V} + I_{12V} \leq 22$ A.
For -9908J; $I_{5.0V} = 20$ A max.; $I_{12V} = 8.5$ A max.; $I_{5.0V} + I_{12V} \leq 22$ A.
Single output units: maximum continuous output power not to exceed 110 W for all models.
- Peak output current lasting less than 30 seconds with duty cycle less than 5%. During peak loading, output voltage may exceed total regulation limits.
- Figure is peak-to-peak for convection power rating. Output noise measurements are made across a 20 MHz bandwidth using a 6" twisted pair, terminated with a 10 μ F electrolytic capacitor and a 0.1 μ F ceramic capacitor.
- Minimum load required for correct start-up and operation on single outputs and on main output of multiple versions. Failure to observe minimum load on main output will not allow the supply to start-up correctly. Some electronic test loads have a large delay time before they start drawing current even though the voltage from the supply is present. During this time delay, there is no load on the output and as a result, the supply cannot start-up properly and maintain its correct output voltage. In these instances, a dummy resistive load across the output may be necessary to load the output of the supply until the test load can function correctly and draw the intended minimum load. Minimum load required on auxiliary outputs to maintain regulation.
- For models NLP110-9908J and NLP110-9995J, the 12 V output is floating. For -12 V output, pin 11 on J2 has to be connected to Return making pin 12 the -12 V output
- Three orthogonal axes, random vibration 10 minutes for each axes, 2.4 G rms 5 Hz to 500 Hz.
- For optimum reliability, no part of the heatsink should exceed 110 °C, and no semiconductor case temperature should exceed 120 °C.
- CAUTION: Allow a minimum of 1 second after disconnecting line power when making thermal measurements.
- This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- The EMI specifications reference measurements made with the power supply mounted on a grounded metal sheet extending 1 inch beyond each edge, using an unshielded cable. No external filtering required during conducted emissions testing but some applications may require additional filtering to achieve system compliance. A line choke, (ac input cords looped twice through an EMI suppression toroid) was used during radiated emissions testing. Considerable radiated testing in 1U six-sided boxes has shown that units can meet level B in typical systems. Application support is available from the factory to assist with EMI compliance.
- All models require a minimum mounting stand-off of 6.35 mm (0.25 inches) in the end use product.
- The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant. TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

NLP110 Medical Series

Single and triple output





LOW TO MEDIUM POWER AC/DC POWER SUPPLIES | 80-110 W AC/DC Universal Input Switch Mode Power Supplies 3

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

Mechanical Notes


A All dimensions are in inches (mm).

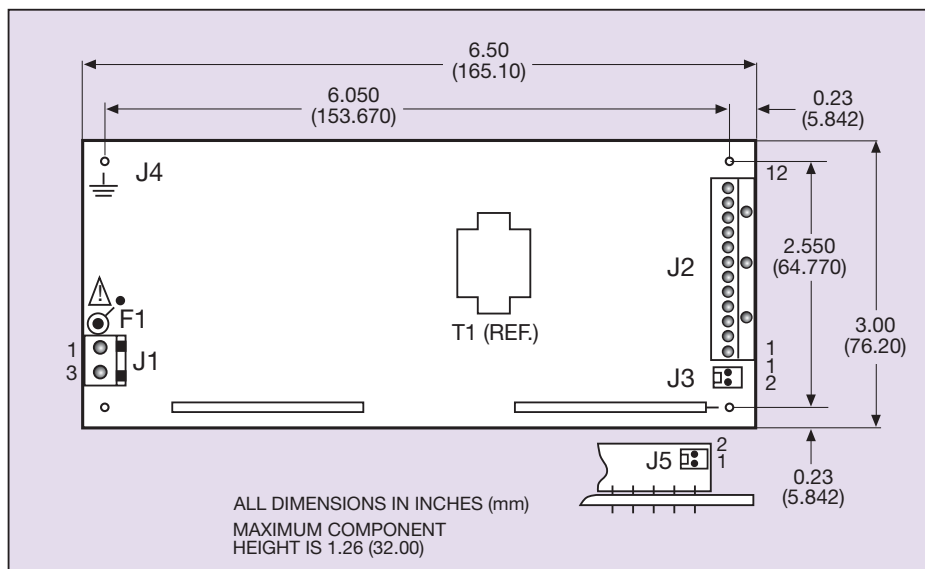

Recommended direction for forced air relative to power supply orientation shown below.

- 1 Optimum.
- 2 Very good.
- 3 Good.
- 4 Not recommended.

INPUT PIN CONNECTIONS		OUTPUT PIN CONNECTIONS		
J1		J2	SINGLE	TRIPLE
Pin 1	AC Neutral	Pin 1	No Connection	V (B)
Pin 2	No Connection	Pin 2	No Connection	V (B)
Pin 3	AC Line	Pin 3	No Connection	V (B)
J3		Pin 4	Return	Return
Pin 1	V (A) Sense +	Pin 5	Return	Return
Pin 2	V (A) Sense -	Pin 6	Return	Return
J4		Pin 7	Return	Return
Pin 1	Safety Earth	Pin 8	V (A)	V (A)
J5		Pin 9	V (A)	V (A)
Pin 1	V (B) Sense +	Pin 10	V (A)	V (A)
Pin 2	V (B) Sense -	Pin 11	No Connection	V (C)
		Pin 12	No Connection	V (C) Return ⁽⁷⁾

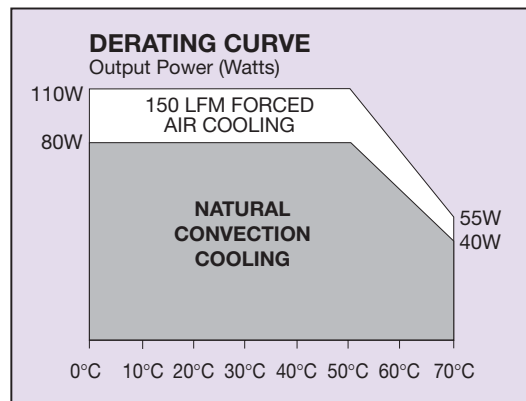

Input and output connectors

AC (J1) connector type

Molex 26-60-4030 or equivalent.

DC (J2) connector type

12 position Molex Spox type 26-48-1125 or equivalent.

Sense (J3) connector type

Molex 22-23-2021 or equivalent.

Earth (J4) connector type

Male 0.250 quick disconnect.

Sense (J5) connector type

Leoco 2421P02H000.

Mating connectors

AC (J1) mating connector type

Molex 09-50-3031 or equivalent with Molex 08-50-0105 or equivalent crimp terminals.

DC (J2) mating connector type

Molex Spox type 26-03-3121 and contact 08-52-0113.

Sense (J3) mating connector type

Molex 22-01-3027 and contact 08-50-0113.


Earth (J4) mating connector type

Molex 90028.

Sense (J5) mating connector type

Leoco 2420S020000 and contact 2453TPB00V1.

International Safety Standard Approvals



Datasheet © Artesyn Technologies® 2005

The information and specifications contained in this datasheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.