

Special Features

- 644 Watt Output Power
- 1.5U x 3U Form Factor
- Multiple Output
- Wide Input Voltage Range
- No Minimum Load required
- Stand-by Output Voltage 5V@2A
- Remote sense
- Active Power Factor Corrector
- Fan Status Monitoring
- Multiphase buck synchronous rectification
- Input harmonics conform to EN61000-3-2 and EN61000-3-3
- RoHS-6 Compliant (Directive 2002/95/EC)



Applications

Test & Measurement Equipment (PXI Modular Instruments),
Industrial Equipment

Input Specifications

Input Voltage	110 Vac, 230 Vac (90 to 264 Vac Full Range), Single Phase
Input Frequency	50 Hz, 60 Hz, 400 Hz (47 to 440 Hz)
Maximum Input Current	10 A @ 90 Vac
Maximum Inrush Current	40 A peak
Power Factor Corrector	≥0.95 (Full Load @ 230 Vac)
Input Protection	Internal fuse, 12.5 A

Output Specification

Output Power (max) 644 W

	+3.3V	+5V	+12V	-12V	+12V Fan	5Vaux
Output Voltage	0 to 40 A	0 to 59 A*	0 to 19 A*	0 to 4.5 A	0 to 3.7 A	0 to 2 A
Output Current	±2.5%	±2.5%	±2.5%	±2.5%	±5%	±5%
Voltage Regulation	<50 mV	<50 mV	<50 mV	<50 mV	<120 mV	<50 mV
Ripple	*Total power +12V plus +5V = 403W					

Efficiency (typ.)	>80% (Full Load @ 230Vac)
Hold-up Time	>20 ms (Full Load)

Protections

Output Over Voltage	Latch Mode with recovery when fault condition is removed and the Power Supply is cycled ON/OFF
Output Overload	Constant Current Mode
Output Short Circuit	Constant Current Mode
Over Temperature	The Power Supply shuts down to protect itself before excessive temperature causes damage; It restarts when the temperature decreases within acceptable range

Features

Soft Start	
Remote ON-OFF	
Remote sense	on Output Voltages: +3.3V, +5V,+12V, -12V
Auxiliary voltage	available on stand by +5V @ 2 A
Thermal shutdown alarm	
Fan Rotation detector	The Power Supply indicates the status of each fan via a logic signal on the connector

Environmental

Operating Temperature	0 to +60 °C Full Load
Storage Temperature	-40 to +70 °C
Relative Humidity	5% to 95% (non-condensing)
Cooling	Internal Fans (temperature controlled speed for low acoustic noise and extended life performances)
MTBF	>500000 h (Calculated @ 25 °C ambient temperature – Telcordia Issue 1)

Safety

Safety Agency Approvals	cUR _{US} , D, CB Certificate
Safety Standards	IEC 60950-1 Ed1.0 (2001); UL 60950-1:2003,First Edition, CSA 22.2 No 60950-1-03 1 st Ed. April,1 2003

EMC Compliance

Conducted Emissions	EN55022 Class B
Harmonic Distortion	EN61000-3-2
Flicker and Fluctuation	EN61000-3-3
Electrostatic Discharge	EN61000-4-2
Fast Transients/bursts	EN61000-4-4
Input Line Surges	EN61000-4-5
Voltage Dips	EN61000-4-11
Shock and Vibration Test	

Eu and RoW


ROAL Electronics S.p.A
Via Jesina 56/A
60022 – Castelfidardo (AN) - Italy
Tel:+39 071 721461
Fax:+ 39 071 72146 480
www.roallivingenergy.com

North America

ROAL Electronics USA, Inc.
701, Main St. Suite 405
Stroudsburg, PA18360
Phone: + 1 570 421 5750
Fax: +1 570 421 5687
Rev. 02 Jun 07 – Pag. 2/3

Physical Specification

Case Fully enclosed metal box
Dimensions (HxWxD) 1.5U x 3U x 313 mm = 63.5 mm x 127 mm x 313 mm = 2.5 in x 5.0 in x 12.3 in
Weight 2.8 kg = 6.2 lb

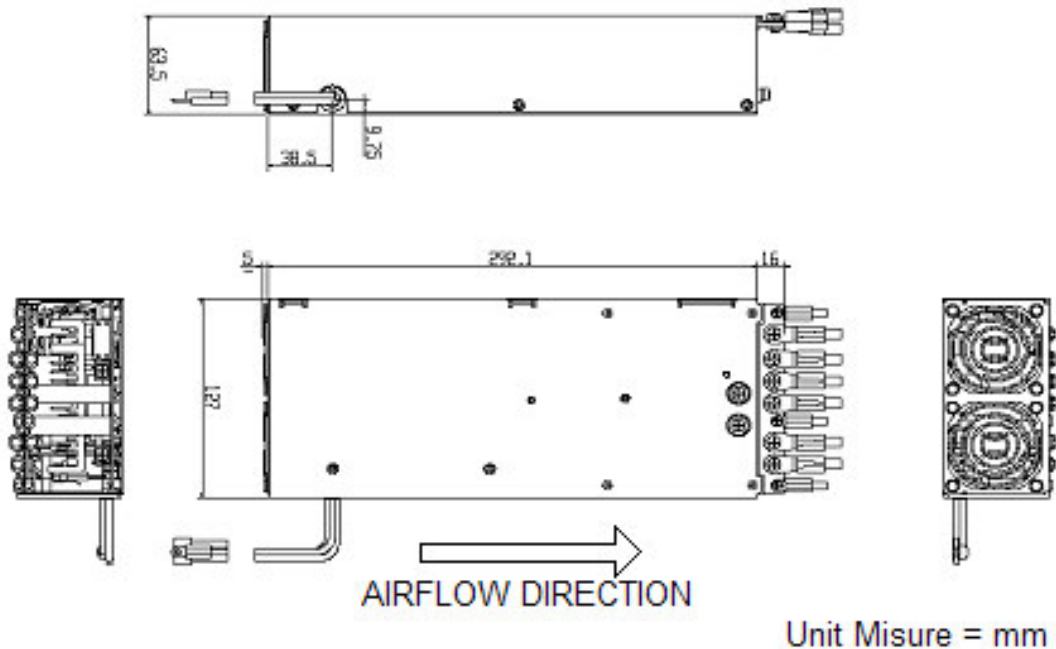

Roal Electronics, S.p.A. may change product specifications and accordingly the information presented in this document. Customers are responsible for their products and applications using Roal Electronics, S.p.A. products. Roal Electronics, S.p.A. assumes no liability from the use of its products outside of specifications. No license is granted to any intellectual property rights by this document. ROAL ELECTRONICS, S.P.A. DISCLAIMS ALL REPRESENTATIONS AND WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF NONINFRINGEMENT, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE

Eu and RoW

ROAL Electronics S.p.A.
Via Jesina 56/A
60022 – Castelfidardo (AN) - Italy
Tel: +39 071 721461
Fax: +39 071 72146 480
www.roallivingenergy.com

North America

ROAL Electronics USA, Inc.
701, Main St. Suite 405
Stroudsburg, PA18360
Phone: +1 570 421 5750
Fax: +1 570 421 5687
Rev. 02 Jun 07 – Pag. 3/3