

## AIQ00ZPFC-01NL

### 75 Watts

**Total Power:** 75 Watts  
**Input Voltage:** 100 - 122 Vac  
**# of Outputs:** Single



## Special Features

- Unity power factor
- High efficiency - up to 90%
- Civil/Aviation supply frequency range 360 - 800 Hz
- Up to 75 W output power
- Negative enable function
- RTCA-DO 160 Compliant
- 100 °C baseplate operating temperature
- Enable output to control DC-DC converter
- Internal active switch bypassing external inrush current components

## Safety

- UL cUL 60950 Recognized
- TUV EN60950 Licensed

## Electrical Specifications

Input	
Input range:	100 - 122 Vac
Input surge:	180 Vac / 1s
Input frequency:	360 - 800 Hz
Efficiency <sup>2</sup> :	90% @ 115 Vac, 75 W (Typical)
Total harmonic:	RTCA-DO 160 Compliant
Power factor:	Up to 800 Hz @ > 25 W 0.99 typical (115 Vac; 50-360 Hz; 75 W) 0.98 typical (115 Vac; 800 Hz; 75 W)
Control	
LD enable:	Direct drive output to opto-isolator
PFC enable:	Neg TTL compatible
Voltage adjust:	-0% + 30% max.
Output	
Output voltage:	393 Vdc typical
Overvoltage protection:	430 Vdc
Output power limit:	90 W at Vin = 95 Vac
Isolation	
I/O isolation:	None
Input to base-plate:	2700 Vdc
Output to base-plate:	2700 Vdc
Leakage current:	< 1 mA at 800 Hz input frequency


## Environmental Specifications

Operating ambient temperature range:	-20 °C to +100 °C (baseplate temperature)
Storage temperature:	-40 °C to 120 °C
Overtemperature protection:	120 °C max.
Calculated MTBF:	> 1 million hours

Ordering Information

Model Number	Description	Notes
AIQ00ZPFC-01NL	75 W Low Profile PFC Module	Negative Enabled

Mechanical Drawing

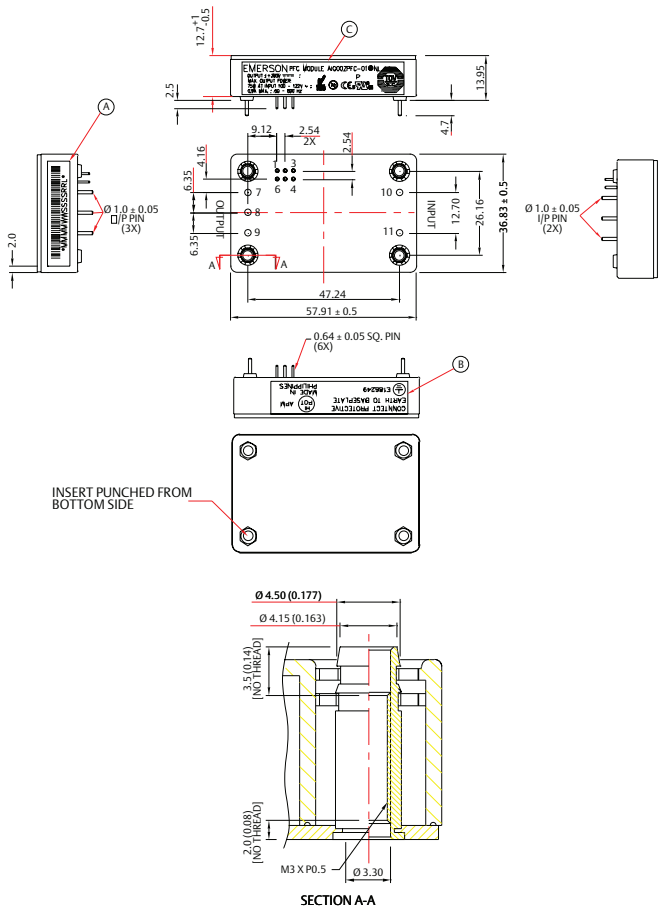

Pin Assignments		
Input (AC)	Output (DC)	Control Pins
10. L1	7.0 Positive	1. PF Enable
11. L2	8.0 Negative	2. Voltage Adj.
	9.0 Inrush	3. Temp Mon.
		4. LD Enable
		5. PFW
		6. GND

- Notes:**
1. All specifications subject to change without notice. Mechanical drawings are for reference only.
  2. Warranty: 1 year
  3. Label and logo appearance may vary from what is shown on mechanical drawings.

**Americas**  
5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 760 930 4600  
Facsimile: +1 760 930 0698

**Europe (UK)**  
Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

**Asia (HK)**  
14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
Telephone: +852 2176 3333  
Facsimile: +852 2176 3888

For global contact, visit:  
[www.Emerson.com/EmbeddedPower](http://www.Emerson.com/EmbeddedPower)  
[techsupport.embeddedpower@emerson.com](mailto:techsupport.embeddedpower@emerson.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

**Emerson Network Power.**  
The global leader in enabling  
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

**EmersonNetworkPower.com**

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2011 Emerson Electric Co.