

# ***EDDY CURRENT***

## ***IC-Serie***





## ***Serie IC***

- ***Measurement ranges 0...2 mm, 2...5mm, 0...8mm***
- ***Output modes: analogue: 0...10 V, 4...20 mA,***
- ***Operating temperature: -10...+70°C***
- ***Unaffected of non-metallic media in the measurement room (e.g. water, oils, fouling, synthetics)***
- ***distance measurement on static and rotating objects***
- ***Measurement of unbalance and vibration***
- ***Contactless quality check in automation***



# 提夫自控技术（上海）有限公司

## Wiring diagram

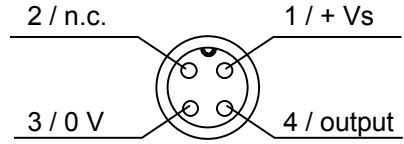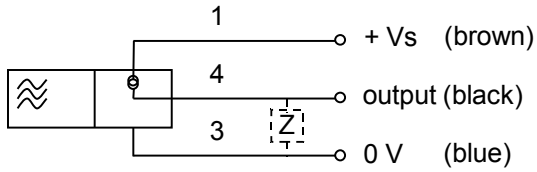

IC12-02

IC18-08

IC18-08-V

IC2035-03

IC2035-03-V

### Accessories IC12-02 und IC18-08

K4P2M-S-M12 4-pole with (straight) inkl. 2m

K4P5M-S-M12 4-pole with (straight) inkl. 2m

### Accessories IC2035-03

K3P2M-S-M8 3-pole with (straight) inkl. 2m

K3P5M-S-M8 3-pole with (straight) inkl. 2m