




GE 工业系统

GE 带来美好生活!


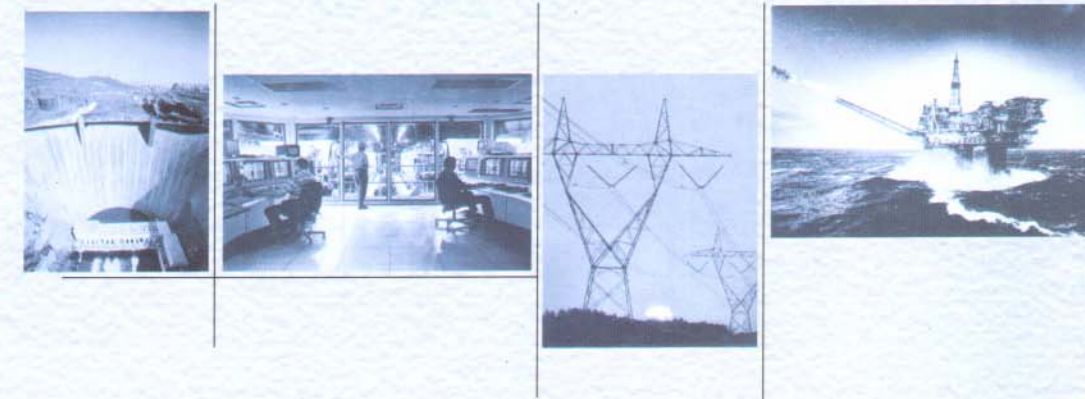


M-CL-CK 接触器



AUXILIARY CONTACTORS 辅助接触器

额定绝缘电压 U _i V	660	1000	
额定工作电流 I _e A	16	20	
电线截面积 mm ²	2 X 2.5	2 X 6	
A600 AC15/AC11	120V Ie A	6	10
	220/230V A	6	10
	380/400V A	4	6
	415/440V A	3	5
	500V A	2.5	4
	660/690V A	1.5	2
P600 DC13/DC11	24V Ie A	5	6
	48V A	3.5	4
	110V A	1.2	2
	220V A	0.6	0.7
	440V A		0.35

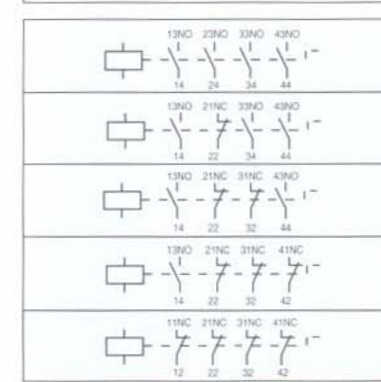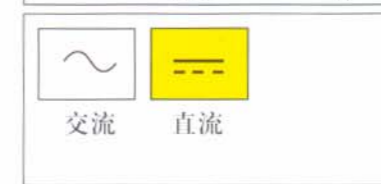

COILS 线圈

MBO A	MBO C	LB1 A	LB1 D
-------	-------	-------	-------

AUXILIARY CONTACT BLOCKS 辅助触点组

FRONT MOUNTED 正面安装	NO NC	2 0	MARN 220 AT	3 NO	BCLF 10
		1 1	MARN 211 AT	1 NO	BCLF 01
		0 2	MARN 202 AT	1 NO	BCLF 10G
		4 0	MARN 440 AT	1 NO	BCLF 01G
		3 1	MARN 431 AT	1 NO	
		2 2	MARN 422 AT	1 NO	
		1 3	MARN 413 AT	1 NO	
		0 4	MARN 404 AT	1 NO	

SIDE MOUNTED 侧面安装	NO NC	1 0	MARL 110 AT	2 0	BRLL 20
		0 1	MARL 101 AT	1 1	BRLL 11


EXTENSION BLOCKS, side mounted 扩展组侧面安装	NO NC	1 0 <td>MARL 110 ATS</td> <td>2 0</td> <td>BRLL 20</td>	MARL 110 ATS	2 0	BRLL 20
		0 1	MARL 101 ATS	1 1	BRLL 11

COILS 线圈电压代号


M - RL	C	D	E	F	G	H	I	J	K	L	M	S	N	R	T	V	U	W	X	Y	Z
50 Hz V	24	32	42	48				110	127		220	240	277	380	415	440	500	660	690		
60 Hz V	24		48		110	120				220	240	277	380	440	480						




MODEL M - MINI-CONTACTORS M 型微型接触器

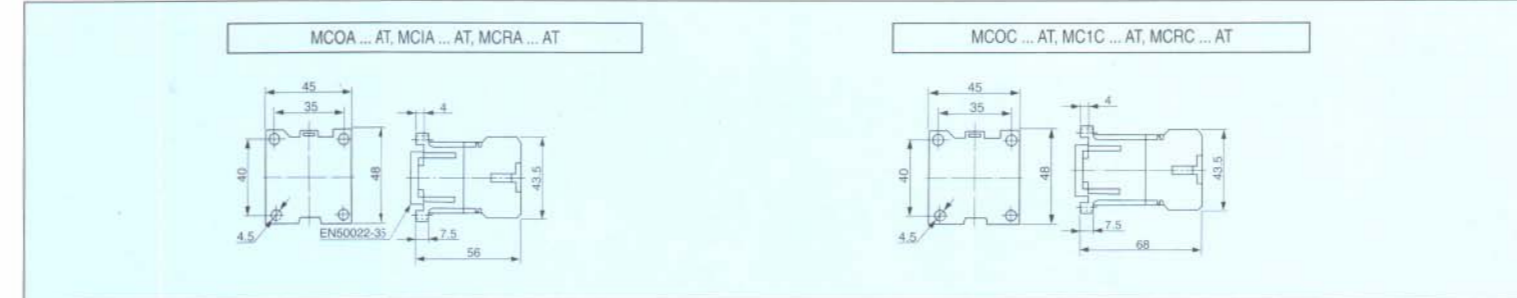

MODEL CL - CONTACTORS CL 型接触器

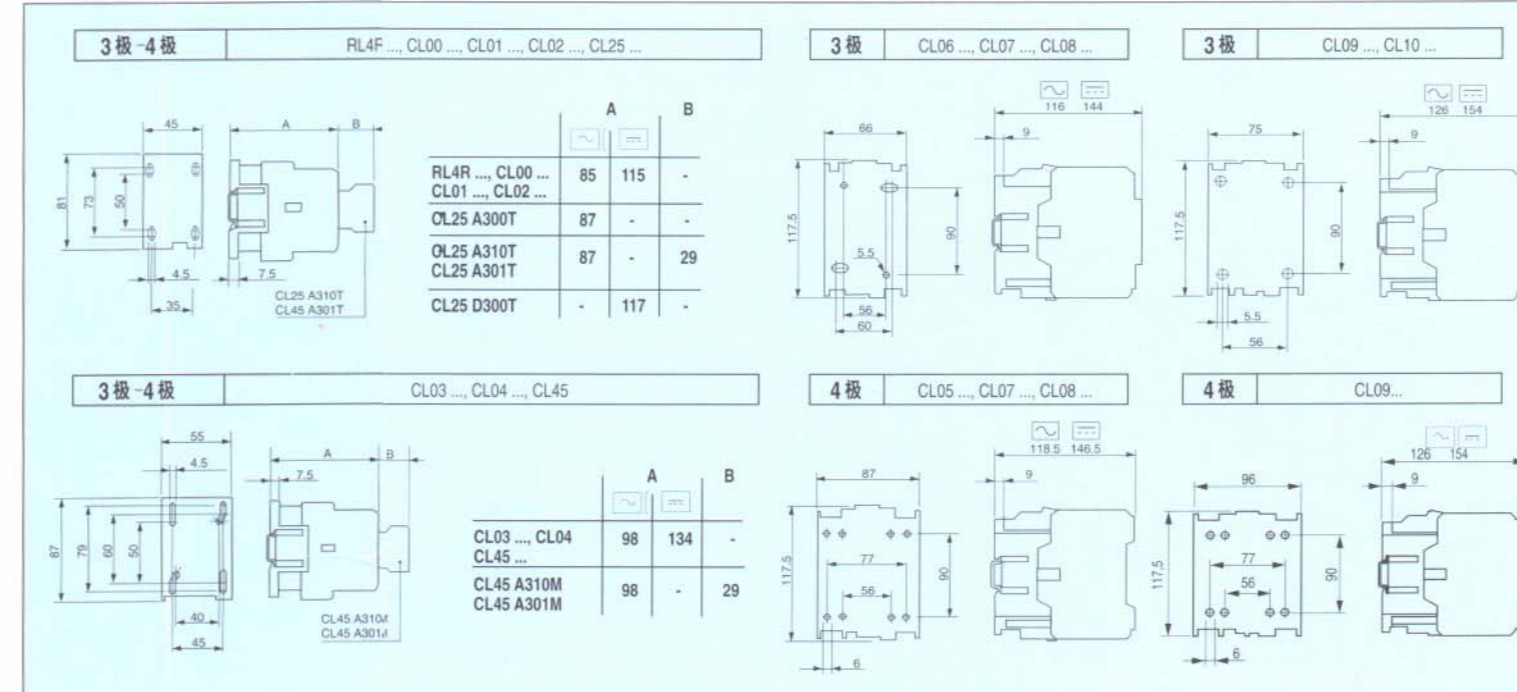

MODEL CK - CONTACTORS CK 型接触器

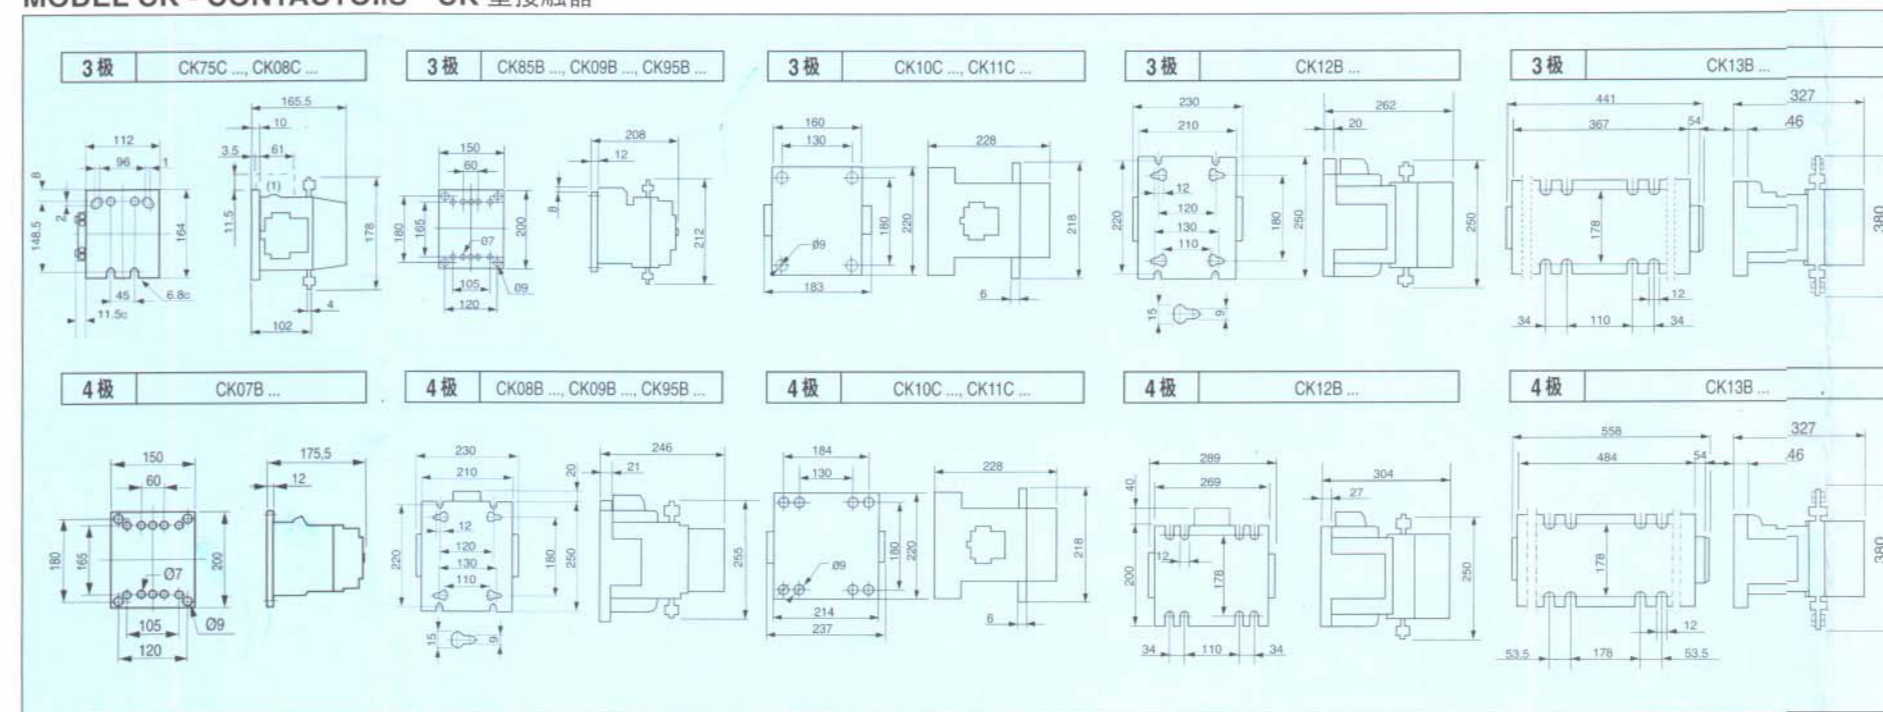


M-CL-CK 型 外形尺寸



CSC 型 技术参数与订货代号

CONTACTOR RANGE CSC CSC 型接触器



内置电阻使得在容性负载的应用中无需降容

热电流 A	环境温度 Ambient temperature										熔断丝 gI-gG	辅助触点 Contacts	订货代号 TYPES ⁽¹⁾
	温度 < 55 °C					温度 < 70 °C							
25	7.5	12.5	13	16	15	3.7	7.5	8	9.5	10	25	2 0	CSC12A320
32	10	16.7	17	21	20	5	10	11	12.5	12.5	35	1 1	CSC16A320
												0 2	CSC16A302
45	12.5	20	21	25	25	7.5	12.5	13	16	15	40	1 1	CSC16A310
												0 2	CSC16A302
45	15	25	26	31	30	10	15	16	18	20	50	1 1	CSC20A320
												0 1	CSC20A310
60	20	30	31	38	35	16	22	23	27	25	63	1 1	CSC20A320
												0 2	CSC20A310
90	25	45	47	56	55	20	35	36	44	40	80	1 1	CSC25A320
												0 1	CSC25A310
110	35	55	57	69	65	30	45	47	56	50	125	1 1	CSC25A320
												0 2	CSC25A310
140	45	70	73	88	85	35	60	62	75	70	160	1 1	CSC30A320
												0 1	CSC30A310

SPARE COILS 备用线圈

CSC12 - CSC25	LB1A
CSC30	LB3A
CSC45 - CSC70	LB4A

COILS 线圈电压代号






CSC AC	C	D	F	G	J	K	M	N	R	V	U	W	X	Y	Z
50 Hz V	24	42	48	110	127		220	240		380	415	440	500	660	
60 Hz V	24		48		120		220	277		440	480	460	600		

如本技术说明书按需要作出修改, 将不会另行通知。



CSC 型 外形尺寸

Dimensions 外形尺寸

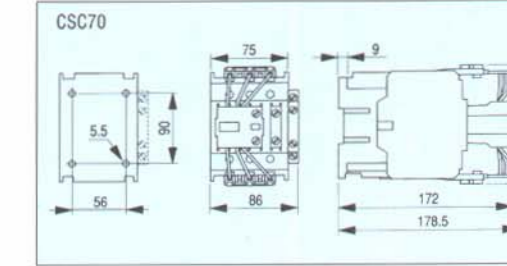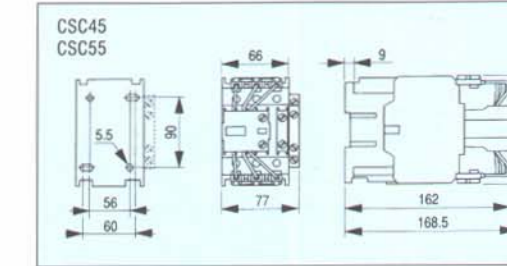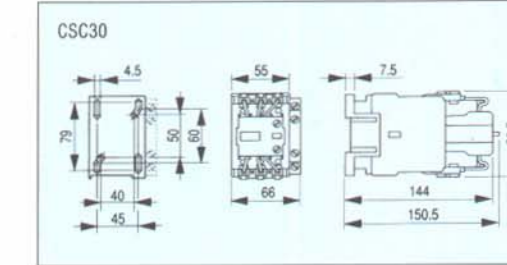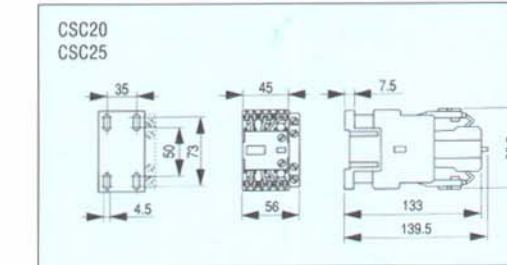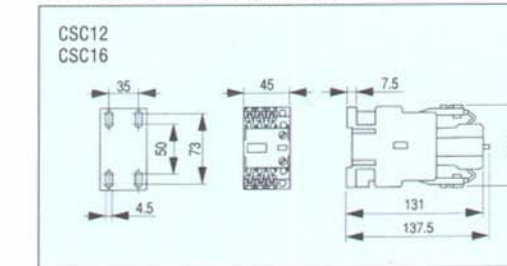

GE 工业系统

工业系统中国总部:
上海市南京西路1468号中欣大厦5层 邮编: 200040
电话: 021-3222 4555 传真: 021-6289 8765
网址: www.geindustrial.com