

Measuring relay
SMU - Phase measuring relay / over voltage with 1 Changeover
 11.25mm housing



Application

Measures three-phase systems for over voltage and phase 1 failure.

Description

The **SMU / over voltage** measures three phase current for over voltage. The relay is powered by the connection to the phase L1 (L1 – N > 170V AC). Additionally, the star point (neutral) of the monitoring phases must be connected. The green LED indicates the connection of the power supply.

Function

The relay switches into its work position as long as all three phases are below the selected values (relay is energized). This status is indicated by the red LED. If at least one of the three phases exceeds the drop-out value, the relay switches to its rest position. As soon as the phase or phases are again under the adjusted value, less hysteresis, the relay re-energizes to its work position. The response time of the relay can be set between 0 and 10 seconds and the hysteresis tolerance between 5 and 30%. The SMU senses the phase angle and will also switch off if the user generates a back feed.

Options

Other time settings, hysteresis tolerance and measuring ranges available upon request.

Part number


012008

SMU three-phase measuring relay
Over voltage / 1 Changeover
Range: L – N 230 – 270V AC

Approvals



Function diagram

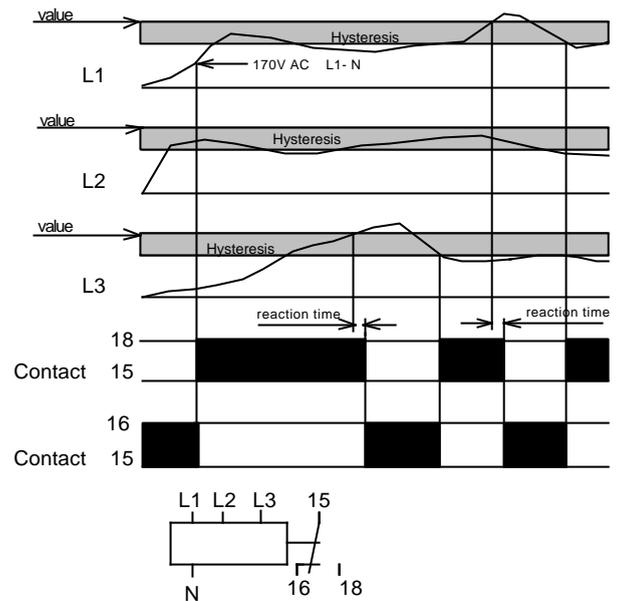

Mounting

Snap-on mounting using a standard DIN rail EN 50022. The unit is designed to allow side-by-side mounting, with an ambient temperature of < 60°C.

Measuring relay
SMU - Phase measuring relay / over voltage with 1 Changeover
 11.25mm housing

Technical data

Supply

Supply voltage: 3 x 400V AC / N
 Frequency range: 50 ... 60Hz
 Power consumption: 8 VA
 Operating mode: continuous

Adjustment range

U > : 170...230V AC
 ΔU : 5...30%
 t_v : 0...10s
 Measuring accuracy: 2% over the entire temperature and voltage range
 Repetitive accuracy: ± 2%

Operation indicators

Supply voltage: LED, green
 Relay in work position: LED, red

Contact


Number of changeovers: 1
 Contact material: AgSnO₂
 Maximum switching voltage: 250V AC
 Maximum switching current: 4A
 Drop-off time of switching element: approx. 20ms
 Mechanical life: 30 Mio.
 Electrical life (with rated load): 0.8 Mio.

General data

Ambient temperature: - 25 ... + 60°C
 Climate resistance: VDE 0435T.2021
 Mounting position: any
 Vibration resistance: VDE 0435T.2021
 Test voltage: 2.5kV
 Isolation group: VDE 0110 Group C 250
 Protection class: Terminals IP 20
 Housing IP 40
 Connection terminals: Crosshead screws; M3.5 self opening
 Connection cross section: Multi-strand wire with wire sleeves 2 x 2.5mm²
 single wire 2 x 2.5mm²
 Finger touch protection: VDE 0106T.100 and VBG4
 Mounting: Symmetrical DIN rail EN 50022
 Dimensions l x w x h: 78mm x 11.25mm x 110mm
 Weight: 77g


上海悦中电气设备有限公司
 上海恒通路360号一天下大厦24C
 TEL: 021-62246890
 FAX: 021-52240873
 Http://www.skjd.cn
 E-mail: shskjd@126.com

Example

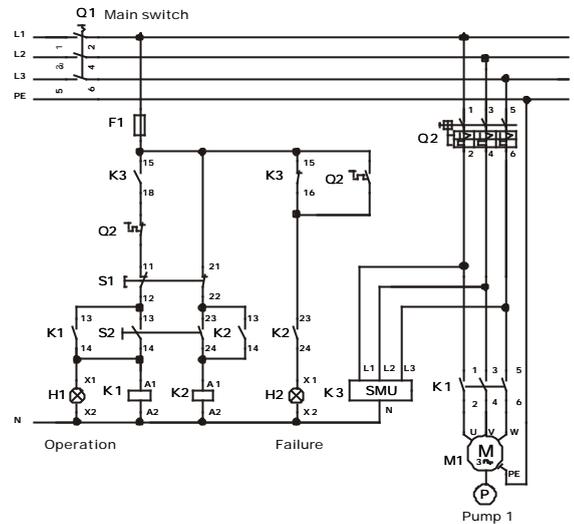

The SMU monitors a pump motor for over voltage.

Dimensions

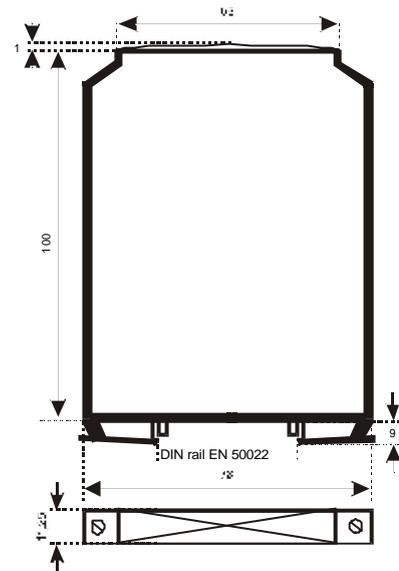

CONNECTIONS

The terminal assignment for the connections is located on the front panel of the relay. **Reading the front panel from top to bottom**, the connections are in the following order:

LED side: L1 – L2 – L3 - 15
 Potentiometer side: nc – N – 16 – 18