


## MOD. 20 Pressostato a pistone $\leq 48V$ Piston pressure switch $\leq 48V$

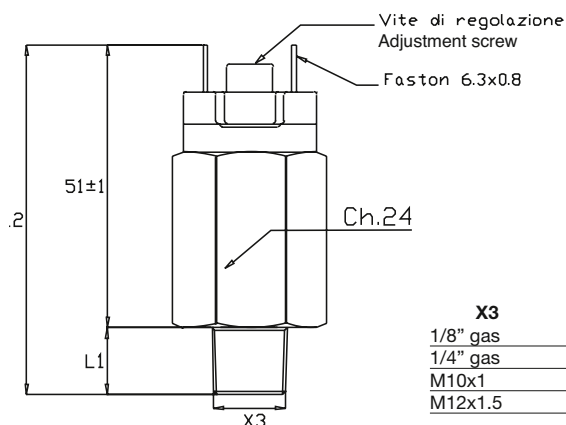

	X3	L1	L2
1/8" gas		10	61
1/4" gas		12	63
M10x1		10	61
M12x1.5		9	60

• Corpo	Acciaio zincato
• Contatti elettrici	Argentati, a richiesta dorati
• Condizione elettrica	NA (grigio) NC (nero)
• Max tensione commutabile	48 V
• Max corrente commutabile	0.5 (0.2) A
• Max temperatura fluido	80°C
• Tipo di azionamento	1B
• Situazione di inquinazione	normale
• Vita meccanica	10 <sup>5</sup> operazioni
• Grado di protezione	IP 00
con cappuccio 3015001	IP 54 (vedi pag. 87)
con cappuccio 3900001	IP 65 (vedi pag. 87)
• Conforme alla norma EN 60730-I	
• <input type="checkbox"/> Inserire codice O-Ring	7 PUR 9 NBR (vedi pagina 86)
• Peso	~ 100 gr

• Case	Zinc plated steel
• Electric contacts	Silver plated, on request gold plated
• Electrical condition	N.O. (grey) NC (black)
• Max switched voltage	48 V
• Max switched current	0.5 (0.2)A
• Max fluid temperature	80°C
• Action type	1B
• Pollution situation	normal
• Mechanical working life	10 <sup>5</sup> operations
• Protection degree	IP 00
with cover 3015001	IP 54 (see page 87)
with cap 3900001	IP 65 (see page 87)
• In accordance with EN 60730-I	
• <input type="checkbox"/> Insert O-Ring code	7 PUR 9 NBR (see page 86)
• Weight	~ 100 gr

Codice - Part Number		filettatura - thread	Campo di regolazione Setting range bar	Tolleranza a 20°C Tolerance at 20°C bar
contatto elettrico - electrical contact				
norm. aperto norm. open	norm. chiuso norm. closed			
20 1 0 1 <input type="checkbox"/> 6	20 2 0 1 <input type="checkbox"/> 6	1/8" gas conico - conical	30 - 150	± 5
20 1 0 2 <input type="checkbox"/> 6	20 2 0 2 <input type="checkbox"/> 6	1/4" gas conico - conical		
20 1 0 3 <input type="checkbox"/> 6	20 2 0 3 <input type="checkbox"/> 6	M10x1 conico - conical		
20 1 0 4 <input type="checkbox"/> 6	20 2 0 4 <input type="checkbox"/> 6	M12x1.5 cilindrico - cylindrical		
20 1 0 1 <input type="checkbox"/> 7	20 2 0 1 <input type="checkbox"/> 7	1/8" gas conico - conical	100 - 300	± 7
20 1 0 2 <input type="checkbox"/> 7	20 2 0 2 <input type="checkbox"/> 7	1/4" gas conico - conical		
20 1 0 3 <input type="checkbox"/> 7	20 2 0 3 <input type="checkbox"/> 7	M10x1 conico - conical		
20 1 0 4 <input type="checkbox"/> 7	20 2 0 4 <input type="checkbox"/> 7	M12x1.5 cilindrico - cylindrical		
600 bar		Massima pressione statica - Max static pressure		