


CPVC CTS PIPE & FITTING



COUPLING 平接頭

| Size | d | L | M | N |
|------|---------------|-------|-------|-------|
| 0.5 | 0.633 (16.08) | 1.156 | 0.844 | 0.094 |
| 0.75 | 0.884 (22.45) | 1.563 | 1.063 | 0.125 |
| 1 | 1.135 (28.83) | 1.938 | 1.375 | 0.125 |
| 1.25 | 1.386 (35.20) | 2.375 | 1.656 | 0.188 |
| 1.5 | 1.840 (46.74) | 2.75 | 1.969 | 0.25 |
| 2 | 2.141 (54.38) | 3.563 | 2.563 | 0.25 |


Unit: Inch (mm)



異徑45°彎頭

| Size | H | H1 | J | J1 | M1 |
|------|-------|-------|-------|-------|-------|
| 0.5 | 0.75 | 0.813 | 0.25 | 0.25 | 0.813 |
| 0.75 | 1.031 | 1.063 | 0.313 | 0.344 | 1.094 |
| 1 | 1.313 | 1.344 | 0.375 | 0.438 | 1.375 |


Unit: Inch (mm)



銅外牙閥接頭

| Size | L | M1 | N |
|------|-------|-------|-------|
| 0.5 | 1.719 | 0.844 | 0.531 |
| 0.75 | 1.938 | 1.094 | 0.563 |


Unit: Inch (mm)



銅內牙閥接頭

| Size | L | M | M1 | N |
|------|-------|-------|-------|-------|
| 0.5 | 1.375 | 0.844 | 1.219 | 0.094 |
| 0.75 | 1.594 | 1.094 | 1.375 | 0.125 |

Unit: Inch (mm)






CPVC CTS PIPE & FITTING

异径90°弯头

Unit: Inch (mm)


| Size | G | G1 | H | H1 | M1 |
|------|-------|-------|-------|-------|-------|
| 0.5 | 0.5 | 0.406 | 1 | 0.938 | 0.844 |
| 0.75 | 0.688 | 0.563 | 1.313 | 1.313 | 1.063 |
| 1 | 1.688 | 0.813 | 1.688 | 1.719 | 1.375 |



PIPE 管材

Unit: Inch (mm)


| Nominal Pipe Size | Mean Outside Diameter | O.D. Tolerance | Minimum Wall Thickness |
|-------------------|-----------------------|----------------|------------------------|
| 0.5 | 0.625 | ±0.003 | 0.068 |
| 0.75 | 0.875 | ±0.003 | 0.080 |
| 1 | 1.125 | ±0.003 | 0.102 |
| 1.25 | 1.375 | ±0.003 | 0.125 |
| 1.5 | 1.625 | ±0.004 | 0.148 |
| 2 | 2.125 | ±0.004 | 0.193 |

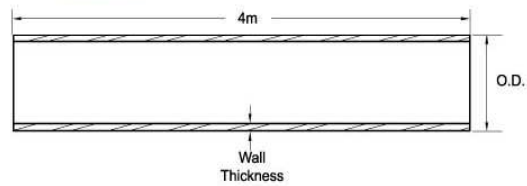

球閥

Unit: Inch (mm)

| Size | A | H | L | D | B | P | D1 | D2 |
|-------|-------|-------|-------|---------------|-------|-------|---------------|---------------|
| 0.5" | 2.350 | 1.5 | 2.701 | 0.633 (16.08) | 0.619 | 0.709 | 0.57 (14.48) | 0.887 (22.53) |
| 0.75" | 2.744 | 1.791 | 3.120 | 0.884 (22.45) | 0.87 | 0.898 | 0.826 (20.98) | 1.205 (30.61) |
| 1" | 3.044 | 2.185 | 3.551 | 1.135 (28.83) | 1.121 | 1.014 | 0.768 (19.51) | 1.5 (38.10) |
| 1.25" | 3.535 | 2.402 | 4.024 | 1.386 (35.20) | 1.372 | 1.1 | 0.949 (24.10) | 1.732 (44.00) |
| 1.5" | 3.516 | 2.539 | 4.598 | 1.640 (41.66) | 1.622 | 1.3 | 1.240 (31.50) | 2.118 (53.80) |
| 2" | 4.378 | 2.894 | 5.110 | 2.141 (54.38) | 2.123 | 1.7 | 1.496 (38.00) | 2.559 (65.00) |




CPVC CTS PIPE & FITTING



MALE ADAPTER 外牙閥接頭

Unit: Inch(mm)


| Size | d | L | M1 | N |
|------|---------------|-------|-------|-------|
| 0.5 | 0.633 (16.08) | 1.25 | 0.875 | 0.188 |
| 0.75 | 0.884 (22.45) | 1.594 | 1.094 | 0.219 |
| 1 | 1.135 (28.83) | 1.875 | 1.344 | 0.219 |
| 1.25 | 1.386 (35.20) | 2.281 | 1.656 | 0.313 |
| 1.5 | 1.840 (46.74) | 2.469 | 1.969 | 0.313 |
| 2 | 2.141 (54.38) | 2.906 | 2.563 | 0.313 |



FEMALE ADAPTER 內牙閥接頭

Unit: Inch(mm)


| Size | d | L | M | M1 | N |
|------|---------------|-------|-------|-------|-------|
| 0.5 | 0.633 (16.08) | 1.344 | 0.844 | 1.188 | 0.219 |
| 0.75 | 0.884 (22.45) | 1.563 | 1.094 | 1.375 | 0.219 |
| 1 | 1.135 (28.83) | 1.938 | 1.375 | 1.688 | 0.313 |



REDUCER COUPLING 大小頭

Unit: Inch(mm)

| Size | d1 | d2 | L | M1 | M2 |
|-------|---------------|---------------|-------|-------|-------|
| 0.375 | 0.884 (22.45) | 0.633 (16.08) | 1.375 | 1.094 | 0.844 |
| 0.5 | 1.135 (28.83) | 0.633 (16.08) | 1.75 | 1.344 | 0.844 |
| 0.75 | 1.135 (28.83) | 0.884 (22.45) | 1.75 | 1.344 | 1.094 |
| 0.625 | 1.386 (35.20) | 0.633 (16.08) | 2.625 | 1.656 | 0.844 |
| 0.938 | 1.386 (35.20) | 0.884 (22.45) | 2.625 | 1.656 | 1.094 |
| 1.25 | 1.386 (35.20) | 1.135 (28.83) | 2.625 | 1.656 | 1.344 |






CPVC CTS PIPE & FITTING

90° ELL 彎頭

Unit: Inch (mm)


| Size | d | G | H | M |
|------|---------------|---------------|-------|-------|
| 0.5 | 0.633 (16.08) | 0.375 (9.53) | 0.938 | 0.875 |
| 0.75 | 0.884 (22.45) | 0.563 (14.30) | 1.25 | 1.125 |
| 1 | 1.135 (28.83) | 0.688 (17.48) | 1.563 | 1.375 |
| 1.25 | 1.386 (35.20) | 0.813 (20.65) | 1.906 | 1.656 |
| 1.5 | 1.840 (46.74) | 0.938 (23.83) | 2.25 | 1.969 |
| 2 | 2.141 (54.38) | 1.188 (30.18) | 2.906 | 2.563 |



45° ELL 彎頭

Unit: Inch (mm)


| Size | d | G | H | M |
|------|---------------|--------------|-------|-------|
| 0.5 | 0.633 (16.08) | 0.75 (19.05) | 0.188 | 0.722 |
| 0.75 | 0.884 (22.45) | 1 (25.40) | 0.313 | 1.063 |
| 1 | 1.135 (28.83) | 1.25 (31.75) | 0.344 | 1.344 |
| 1.25 | 1.386 (35.20) | 1.5 (38.10) | 0.406 | 1.656 |
| 1.5 | 1.840 (46.74) | 1.75 (44.45) | 0.438 | 1.969 |
| 2 | 2.141 (54.38) | 2.25 (57.15) | 0.531 | 2.563 |



TEE 正三通

Unit: Inch (mm)

| Size | d | G | H | L | M |
|------|---------------|---------------|-------|-------|-------|
| 0.5 | 0.633 (16.08) | 0.438 (11.13) | 0.938 | 1.875 | 0.813 |
| 0.75 | 0.884 (22.45) | 0.531 (13.49) | 1.25 | 2.5 | 1.094 |
| 1 | 1.135 (28.83) | 0.688 (17.48) | 1.594 | 3.156 | 1.344 |
| 1.25 | 1.386 (35.20) | 0.813 (20.65) | 1.906 | 3.781 | 1.656 |
| 1.5 | 1.840 (46.74) | 0.938 (23.83) | 2.25 | 4.469 | 1.969 |
| 2 | 2.141 (54.38) | 1.188 (30.18) | 2.906 | 5.781 | 2.563 |




CPVC CTS PIPE & FITTING



异徑三通

Unit: Inch (mm)


| Size | G | G1 | G2 | H | H1 | H2 | L | M | M1 | M2 |
|-------|---------------|--------------|--------------|-------|-------|-------|-------|-------|-------|-------|
| 0.188 | 0.438 (11.13) | 0.406(10.31) | 0.969(24.61) | 0.969 | 1.125 | 0.969 | 1.938 | 0.844 | 1.094 | 0.844 |
| 0.281 | 0.531 (13.49) | 0.531(13.49) | 0.594(15.09) | 1.25 | 1.25 | 1.094 | 2.344 | 1.094 | 1.094 | 0.844 |
| 4 | 1.156 (29.36) | 2.313(58.75) | 2.906(73.81) | 2.875 | 3.219 | 2.906 | 5.781 | 2.563 | 2.563 | 2.563 |



卜申

Unit: Inch (mm)

| Size | L | N |
|-------|-------|-------|
| 0.375 | 0.875 | 0.25 |
| 0.5 | 1.125 | 0.625 |
| 0.625 | 1.406 | 0.875 |
| 1.5 | 1.656 | 0.75 |
| 1 | 2 | 1.094 |
| 2 | 2 | 1.469 |



管帽

Unit: Inch (mm)

| Size | M | W |
|------|-------|-------|
| 0.5 | 0.813 | 0.813 |
| 0.75 | 1.063 | 1.063 |
| 1 | 1.375 | 1.313 |
| 1.25 | 1.656 | 1.594 |
| 1.5 | 1.969 | 1.906 |
| 2 | 2.563 | 2.438 |

