

# X-RAY Windows

## DuraBeryllium™ X-ray Windows

MOXTEK DuraBeryllium windows are the highest performing beryllium windows available. DuraBeryllium windows have high x-ray transmission, are vacuum tight, and corrosion resistant. DuraBeryllium windows can be attached with a high temperature bond or using low outgas epoxy. MOXTEK Beryllium windows are used in a variety of applications including *microanalysis*, *EDXRF*, *WDXRF*, and *XRD*.



### Applications

- Microanalysis
- EDXRF
- WDXRF
- XRD

### Features

DuraCoat  
Thin DuraBeryllium  
Uniform Thickness  
Vacuum Tight

### Benefits

Corrosion resistance, hermetic seal  
High transmission of low energies  
Uniform transmission  
No gas diffusion

### Window Composition

DuraBeryllium windows include a proprietary coating process to make the window vacuum-tight and chemically resistant. This foil, protected with a refractory low-Z coating that makes it resistant to atmospheric moisture and chemicals.

Uncoated beryllium windows are also available.

### Mechanical Strength

DuraBerylliums have the same mechanical strength as uncoated beryllium

### Temperature Performance

Brazed windows can withstand temperatures up to 400°C in vacuum or 350°C in air. Epoxied windows can be exposed to temperatures <110 °C at a differential pressure of 1 atm on approved mount designs.

### Cleanability

DuraBeryllium windows can be cleaned with high purity solvents (methanol, isopropanol, or ethanol are recommended).

### Leak Tightness Specifications

MOXTEK DuraBeryllium windows are guaranteed to have a leak rate of less than  $3 \times 10^{-10}$  mbar L/sec of Helium

### Performance

Hardness: 2000 Vickers  
Electrical Resistivity:  $<4 \times 10^4$  ohm-cm



452 West 1260 North  
Orem, UT 84057  
P 801.225.0930  
F 801.221.1121

[www.moxtek.com](http://www.moxtek.com)

## Chemical Compatibility

DuraBeryllium windows are resistant to most solvents, acids, and bases while non-coated beryllium windows are not. DuraBeryllium has a thin layer of a refractory material called DuraCoat which is resistant to moisture and many chemicals, including Tetrachloroethylene (TCE). See the following table for a listing of some of the reactants and non-reactants of DuraBeryllium windows.

Etching Reagents <sup>+</sup>	Nominal pH	Etching Rates (nm/min @25°C)
HF	0.80	Negligible
H <sub>2</sub> SO <sub>4</sub>	1.38	Negligible
HNO <sub>3</sub>	1.17	1.09
Acetic Acid	1.80	Negligible
H <sub>3</sub> PO <sub>4</sub>	1.17	0.146
Aqua Regia <sup>++</sup>	1.00	0.14
NH <sub>4</sub> OH + H <sub>2</sub> O <sub>2</sub>	11.40	Negligible
NaOH Solution <sup>*</sup>	13.70	Negligible
Ferricyanide <sup>**</sup>	13.70	165
Permanganate <sup>#</sup>	13.70	900

<sup>+</sup> All solutions are concentrated unless otherwise indicated

<sup>++</sup> Solution is 1M HNO<sub>3</sub>, 3M HCl, 1M H<sub>2</sub>O

<sup>\*</sup> Solution is 0.5M NaOH, 0.6 H<sub>2</sub>O<sub>2</sub>

<sup>\*\*</sup> Solution is 0.6M K<sub>3</sub>Fe(CN)<sub>6</sub>, 0.5M NaOH, 0.02M oxalic acid

<sup>#</sup> Solution is 0.6M KmnO<sub>4</sub>, 0.5M KOH

## Mounting

MOXTEK offers a mounting service for DuraBeryllium windows. The windows can be mounted with epoxy or braze material. Please contact MOXTEK to discuss requirements for active area, differential pressure, and x-ray transmission.

## Standard Foil Sizes

Thickness (µm)	Diameter (mm)
8.0	4.9
8.0	5.7
8.0	7.9
8.0	9.2
8.0	12.0
12.5	12.0
12.5	16.0
25.0	16.0


Please contact MOXTEK for custom sizes.




452 West 1260 North  
Orem, UT 84057  
P 801.225.0930  
F 801.221.1121  
[www.moxtek.com](http://www.moxtek.com)

## Transmission Performance

The x-ray transmission of DuraBeryllium is virtually identical to that of bare beryllium. DuraCoat is a proprietary refractory coating material, consisting of elements lighter than sodium.

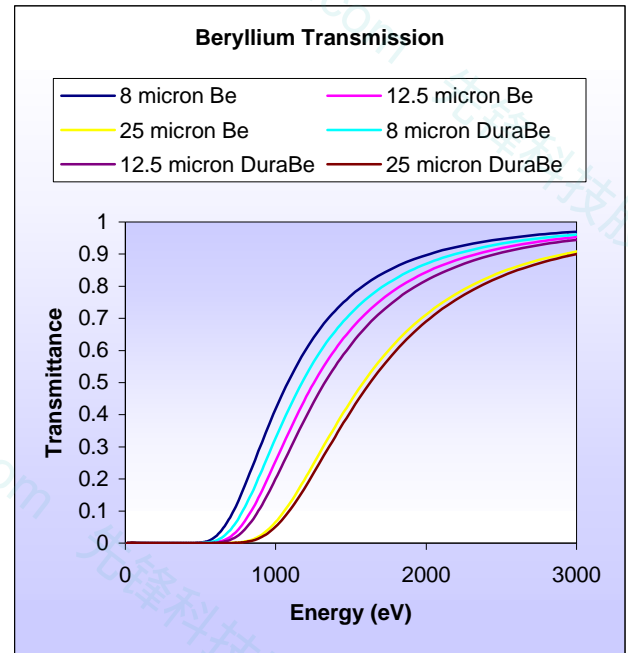

X-ray Transmission Chart

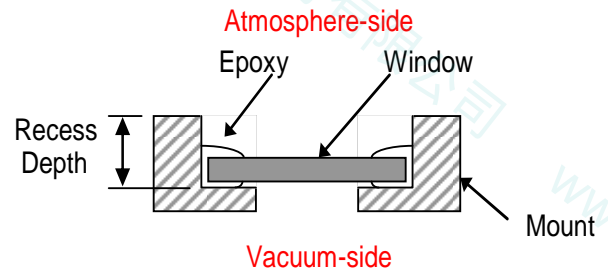

Typical Epoxy Attachment of Beryllium Window

## Warranty

The standard warranty is 1 year under normal operating conditions.

## Ordering Information

Please, contact MOXTEK for price and delivery information.