



YK 系列微型位移传感器安装基座和附件

安装基座


基座：L (150/170) • pn 150015 • 垂直安装；允许以一个轴旋转；不包括传感器

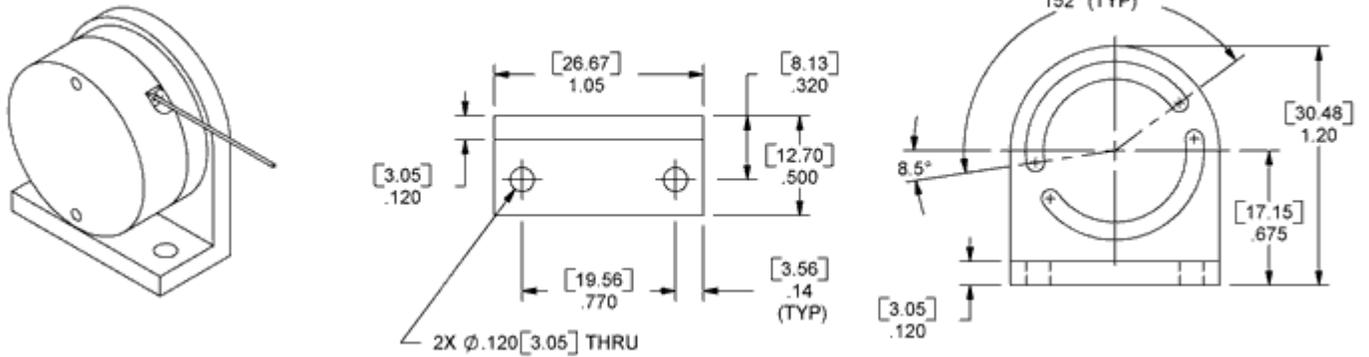


基座：L (173) • pn 173015 • 垂直安装；允许以一个轴旋转；不包括传感器

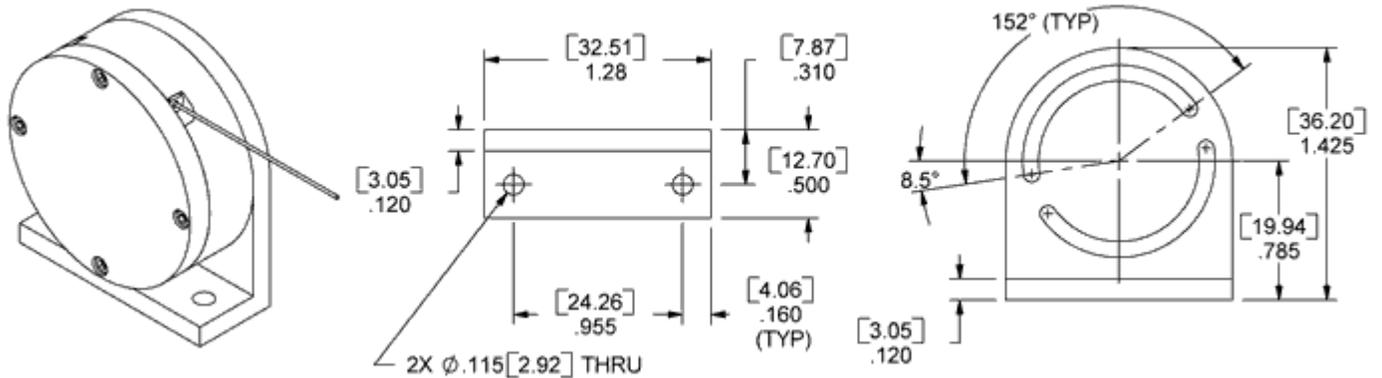


基座：L (174/175) • pn 174015 • 垂直安装；允许以一个轴旋转；不包括传感器

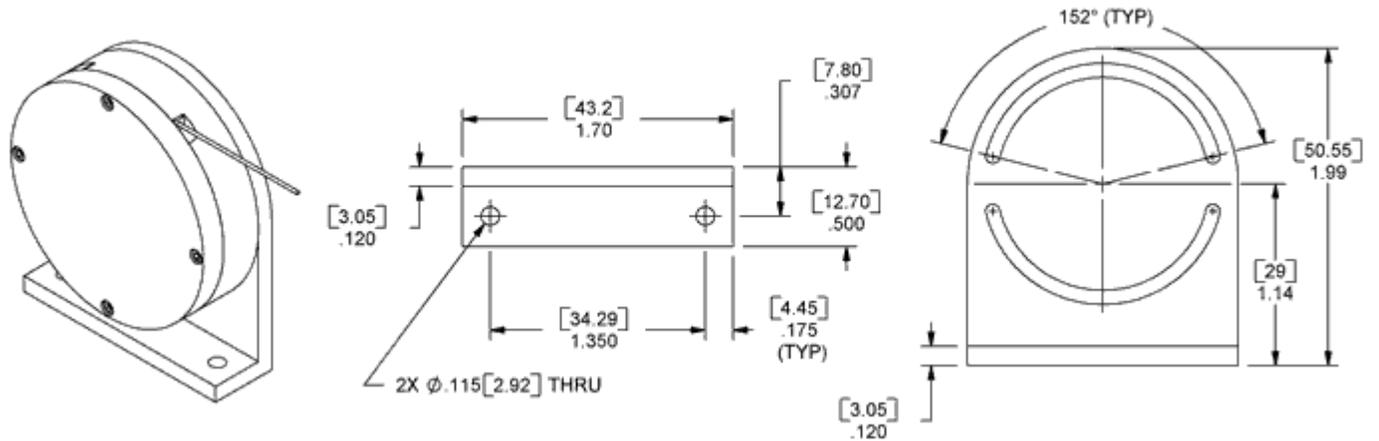

基座：L (176) • pn 176015 • 垂直安装；允许以一个轴旋转；不包括传感器

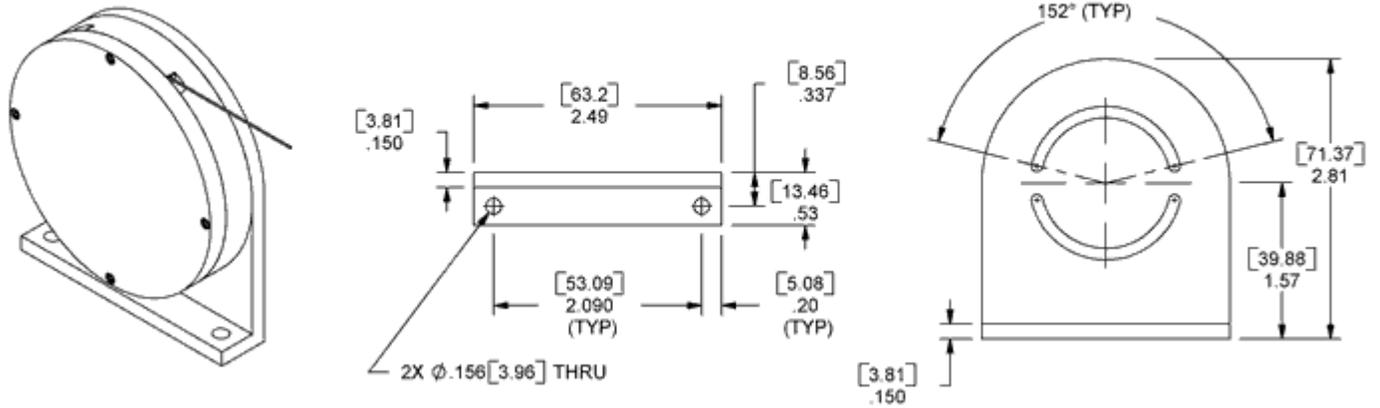


基座：磁铁(_6_) • pn 160005 • 对_6_标准和通用基座有磁性安装能力；不包括传感器；至少订货数量：10 each

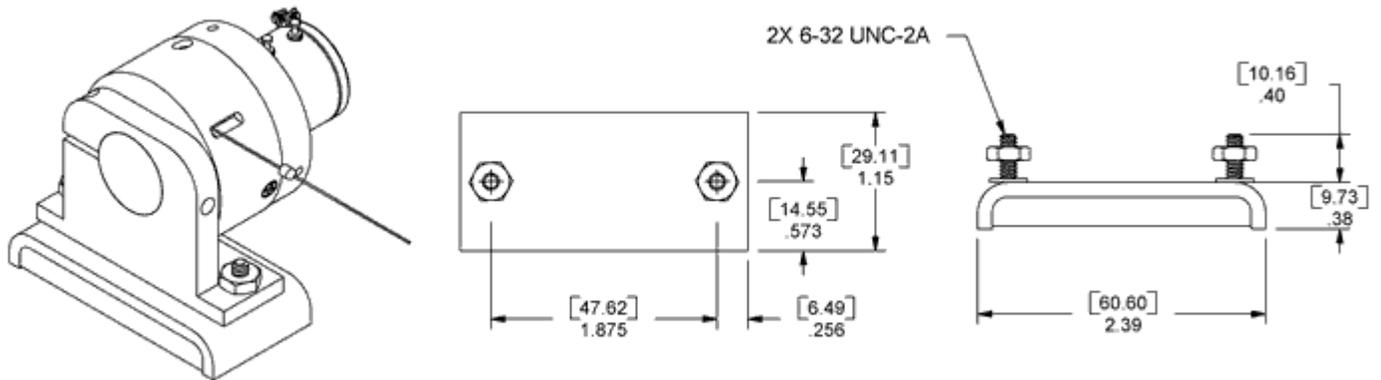



基座：标准(_6_) • pn 160015-_ • 垂直安装；允许以一个轴 360°自由旋转；不包括传感器

DASH#	A	B
-1	1.64 [41.7]	1.13 [28.7]
-3	1.90 [48.3]	1.39 [35.3]
-5	2.28 [57.9]	1.77 [45.0]


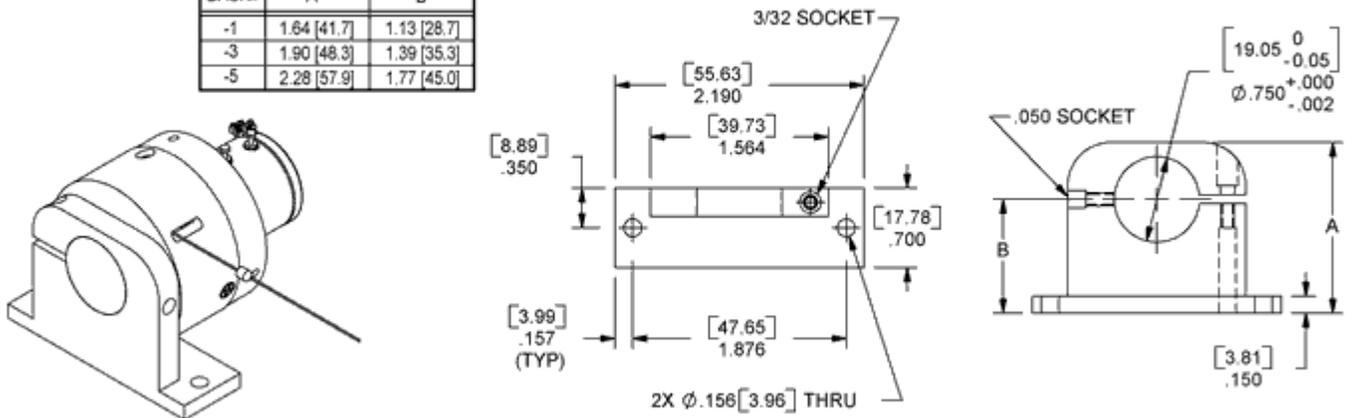


基座：通用(_6_) • pn 160030-_ • 垂直安装；允许绕两个轴旋转；不包括传感器

DASH#	A	B
-1	1.64 [41.7]	1.13 [28.7]
-3	1.90 [48.3]	1.39 [35.3]
-5	2.28 [57.9]	1.77 [45.0]

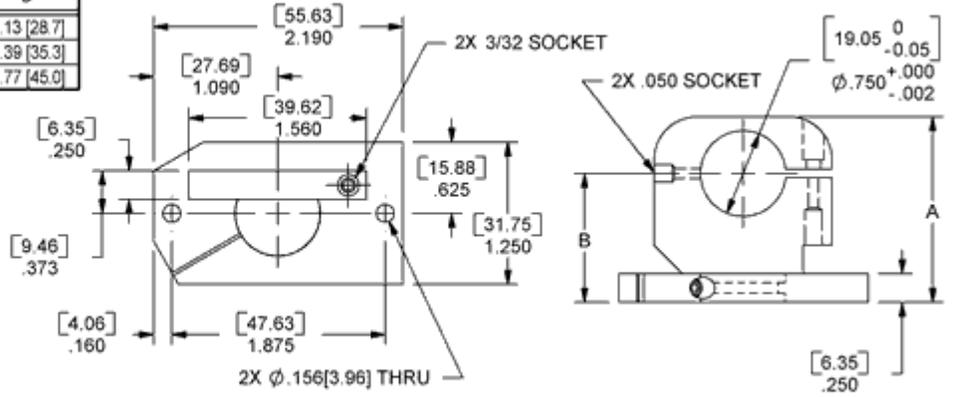
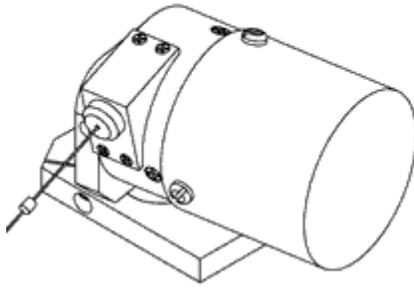


基座：安装盘(_6_) • pn 160040-1 • 以一个轴 360° 旋转；不包括传感器


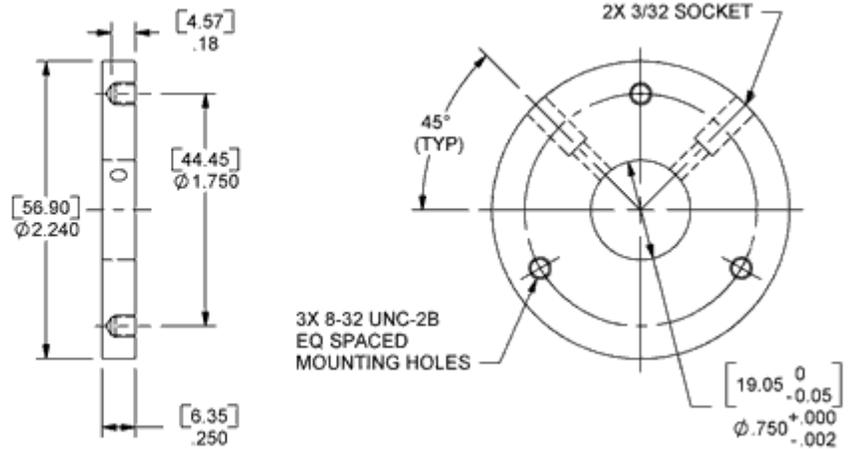
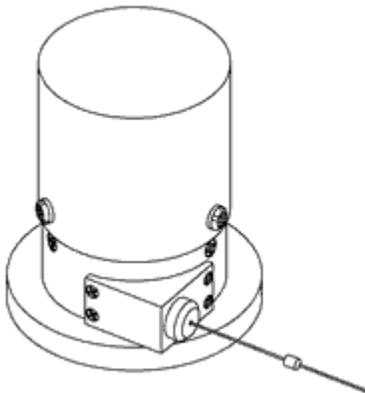


基座：大脚(_6_) • pn 160015-1_ • 与基座类似；带有更宽的底部标准基座，以便有更易螺丝孔，不包括传感器




DASH#	A	B	C	D
-13	1.81 [46.0]	1.31 [33.3]	3.0 [76.2]	2.50 [63.5]
-15	2.19 [55.6]	1.69 [42.9]	4.0 [101.6]	3.50 [88.9]

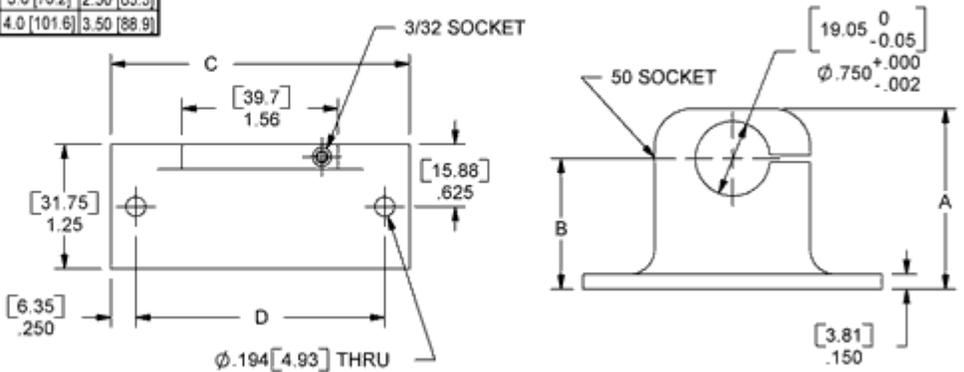


基座：h(_60) • pn 160015-G1 • 与基座类似；带有狭槽标准的基座，用皮带夹住附件；不包括传感器

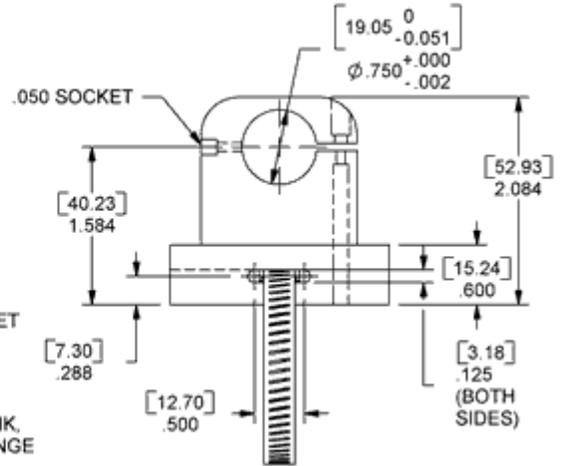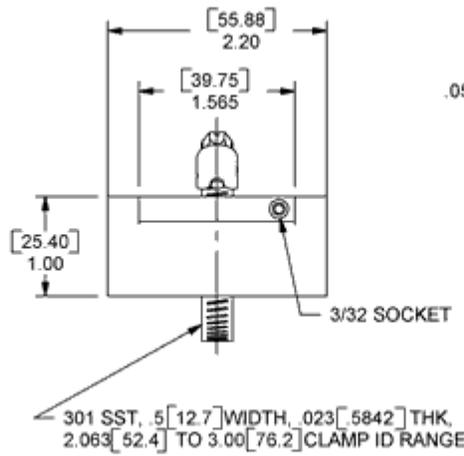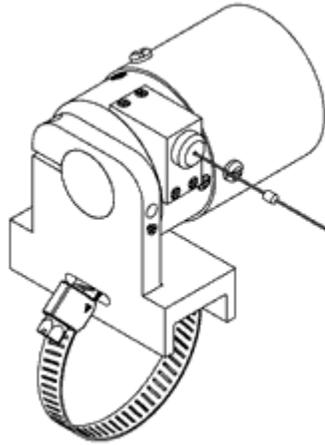


基座：通用(微型) (_60) • pn 300460 • 垂直安装; 允许以两个轴旋转；不包括传感器

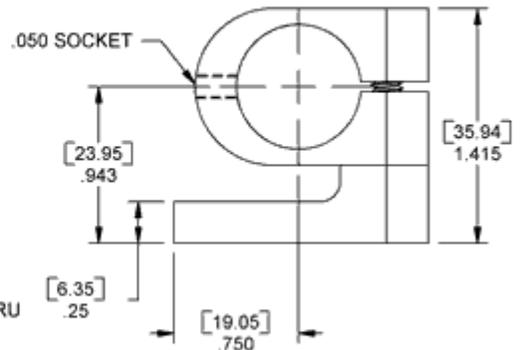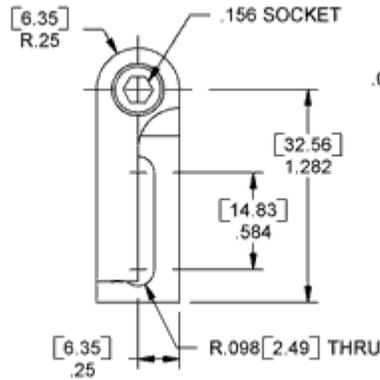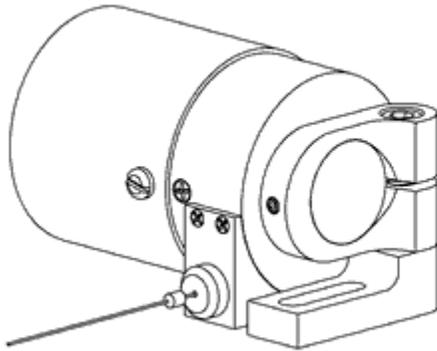



凸轮锁定：4-40 X 1/4 • pn 300278





凸轮锁定：M3 X 0.5 X 8 • pn 300838





基座：L 和平的 • pn 300903 • 允许垂直或水平安装；不包括传感器

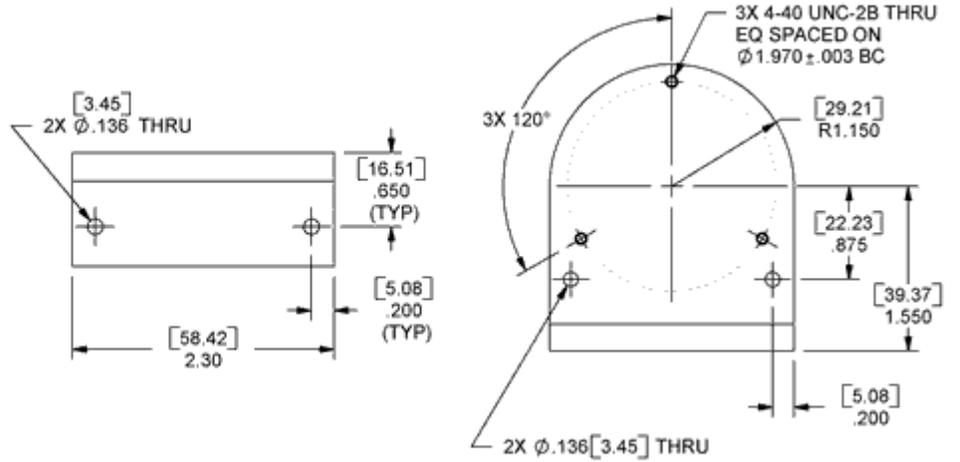

基座：平的 • pn 300923；不包括传感器

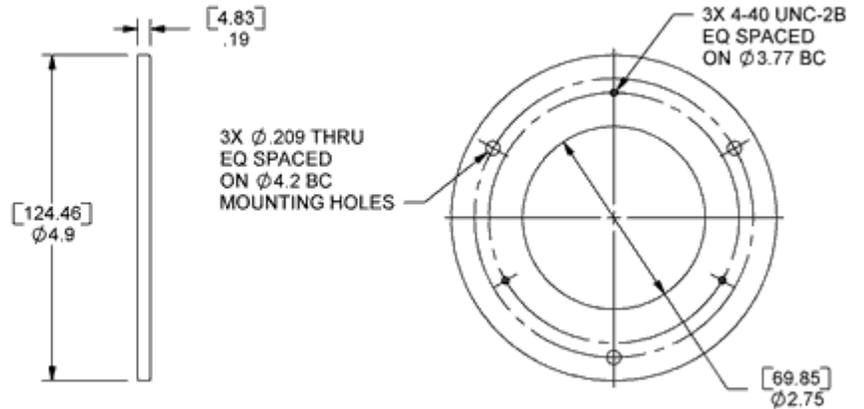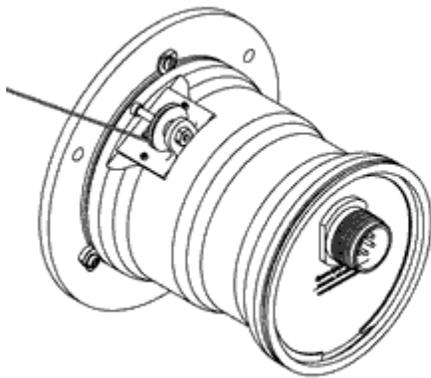


基座：马鞍形 • pn 300952；不包括传感器

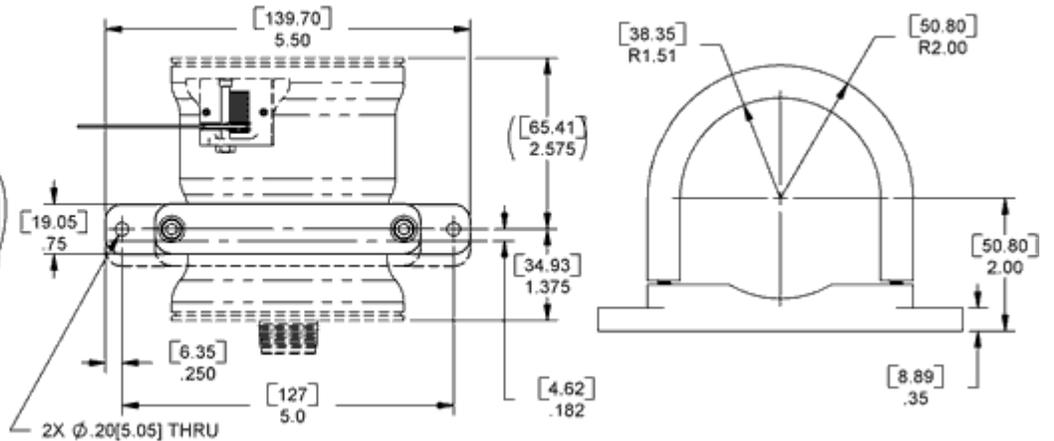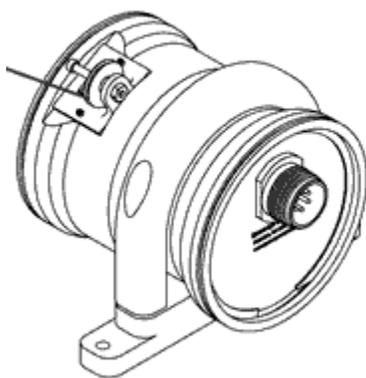


附件


敏感元件盖子 • pn 160060 • 保护敏感元件被不利因素破坏；不包括传感器

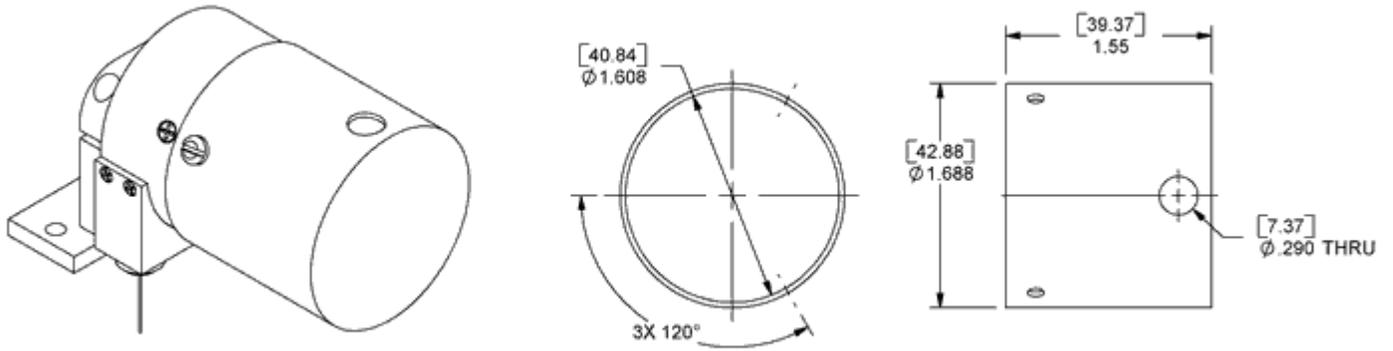


惰轮 • pn 160022 • 补偿离开中心的钢索行程(_60) ;惰轮会缩短移动钢索的寿命 ;惰轮不推荐用于-070 和-080 弹簧 ;惰轮仅仅推荐用于 0.018-inch (0.46-mm) 直径的移动钢索 ;不包括传感器

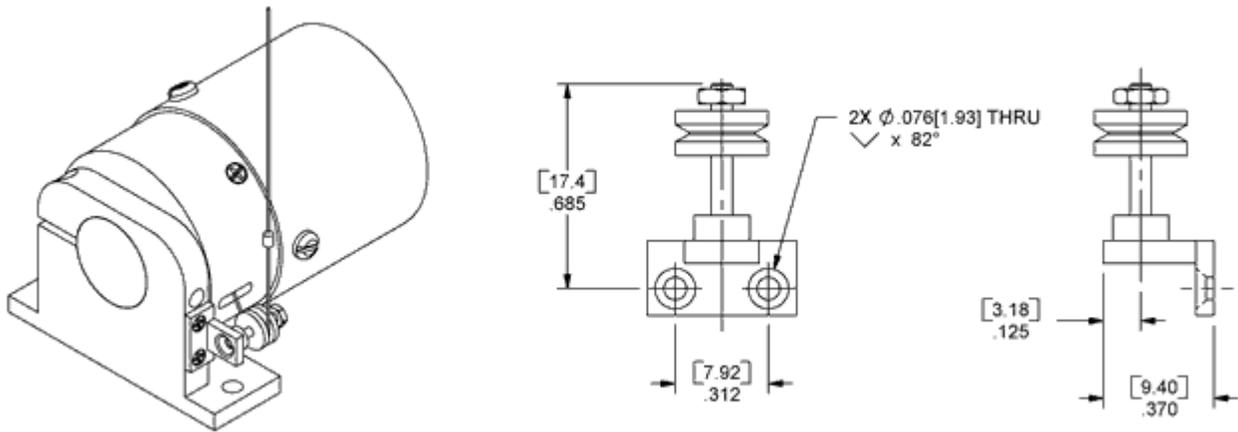


惰轮 • pn 161022 • 补偿离开中心的钢索行程(_61/_62) ;惰轮会缩短移动钢索的寿命 ;惰轮不推荐用于-070 和-080 弹簧 ;惰轮仅仅推荐用于 0.018-inch (0.46-mm) 直径的移动钢索 ;不包括传感器

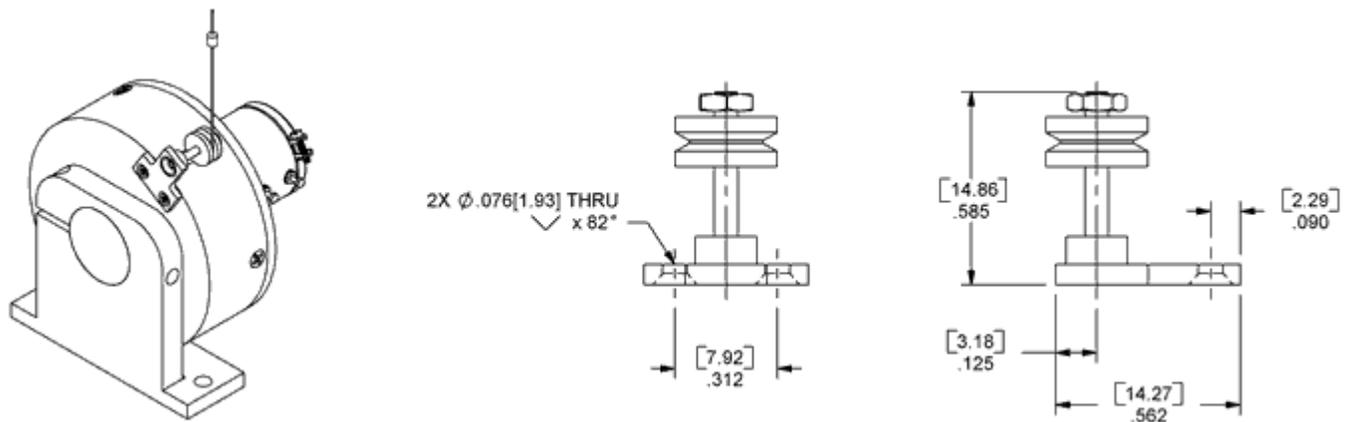

电气连接器 : MS3106F-14S-6S, 6 针, 应变消除 , 匹配 • pn 300853 • 匹配连接器 MS3106A-14S-6P

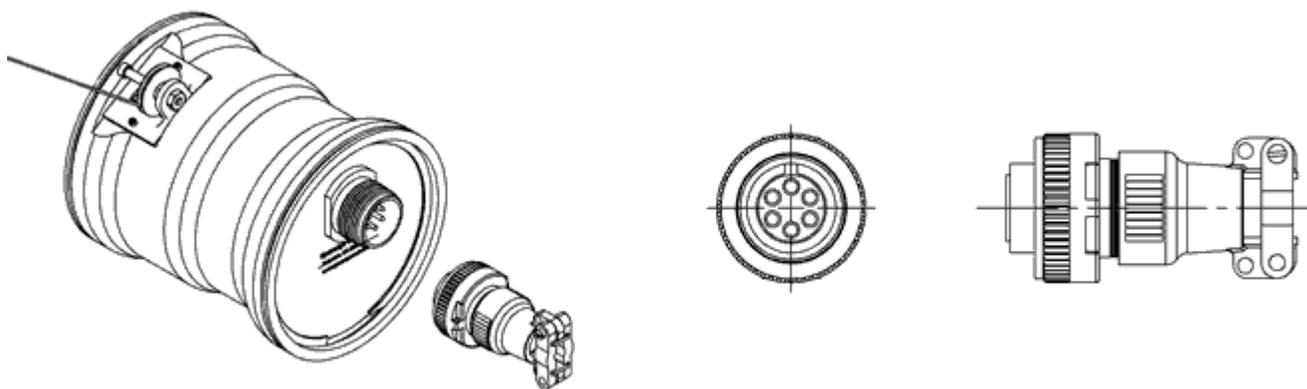












安装工具箱• pn 160001-01 • 协助安装，移动钢索弯曲卷边和相关的操作

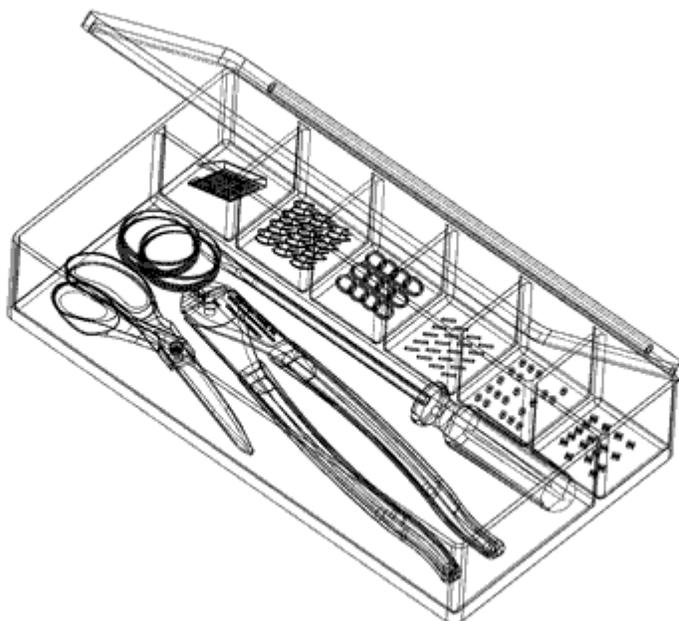

包含:

- 300689 切断移动钢索的剪刀(1 把)
- 300692 退火热源/火机(1)
- 160000 六角扳手(3 种尺寸)
- 300695 螺丝起子(1 把)
- 300687 弯曲钳子 (1 把)
- 300292 铜套管, 0.25 in (10 个)
- 160032 铜套管, 0.50 in (10 个)
- 300400 嵌环 (10 个)
- 300688 球状末端插栓(20 个)
- 300196 环状套管 (40 个)
- 160026 黄铜转环 (10 个)
- 301003 镍转环(10 个)
- 300495 拉环(10 个)
- 300899 螺纹插头(5 个)
- C40.0 0.018-inch (0.4572 mm) 直径; 7 股, 每股 7 根的移动钢索(10 英尺(3.048 m))
- C90.0 0.027-inch (0.6858 mm) 直径; 7 股, 每股 7 根的移动钢索(10 英尺(3.048 m))

移动线缆终端

 <p>环状套管 • pn 300196</p>	 <p>球状末端插栓 • pn 300688</p>	 <p>金属圈 • pn 160032-1</p>	 <p>临时性钢索止动 • pn 300361</p>
 <p>铜套管：长 • pn 160032</p>	 <p>铜套管：短 • pn 300292</p>	 <p>嵌环 • pn 300400</p>	 <p>螺纹插头 • pn 300899</p>
 <p>转环，相互扣住，黄铜，标称至少 10-lb (44.5-N) 拉断力 • pn 160026</p>	 <p>转环，相互扣住，镍，标称至少 40-lb (178-N) 拉断力 • pn 301003</p>	 <p>拉环 • pn 300495</p>	