

# S2



## Force Transducers



### Special features

- Tensile force / compressive
- Nominal forces 20 N ... 1 kN
- Accuracy class 0.05
- High transverse force stability
- Overload protection
- Low overall height

Dimensions (in mm; 1 mm= 0.03937 inches)

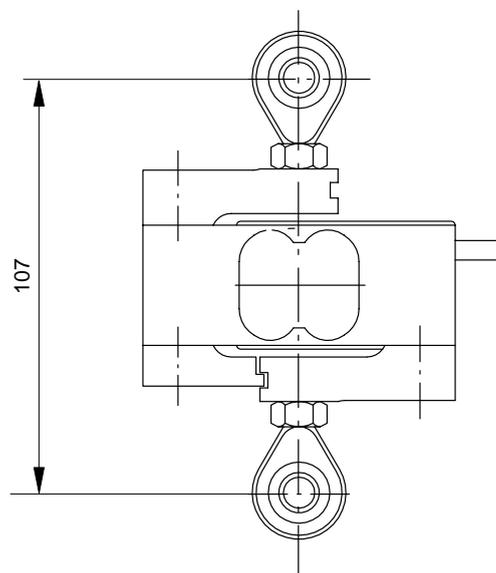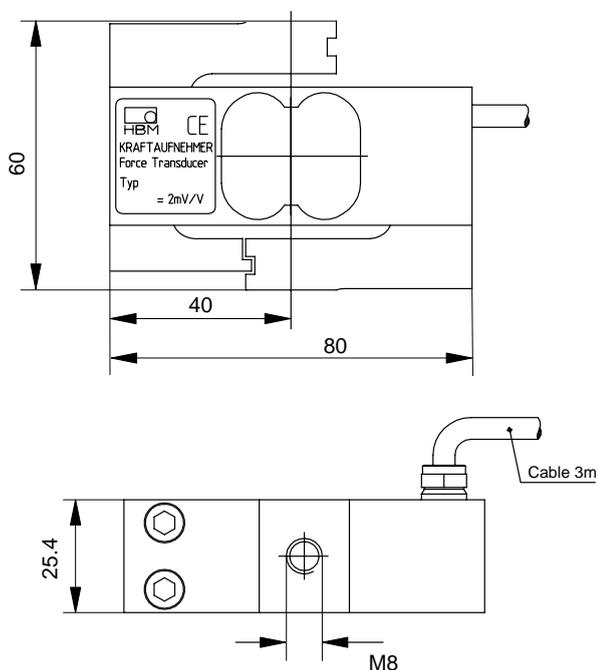

# Specifications under VDI 2638

| Force transducer type   |                    | S2      |                       |      |      |       |      |       |  |
|---|--------------------|---------|-----------------------|------|------|-------|------|-------|--|
| Nominal force   | F <sub>nom</sub>   | N       | 20                    | 50   | 100  | 200   | 500  | 1000  |  |
| Accuracy class  |                    |         | 0.05                  |      |      |       |      |       |  |
| Nominal sensitivity   | C <sub>nom</sub>   | mV/V    | 2                     |      |      |       |      |       |  |
| relative sensitivity deviation tensile/compressive force                                      | d <sub>c</sub>     | %       | ± 0.25                |      |      |       |      |       |  |
| relative tensile/compressive sensitivity difference   | d <sub>zd</sub>    | %       | < ± 0.1               |      |      |       |      |       |  |
| relative deviation from zero  | d <sub>s,0</sub>   | %       | < 8                   | < 6  |      |       |      | < 5   |  |
| Relative range of inversion (0.2F <sub>nom</sub> to F <sub>nom</sub> )                        | u                  | %       | 0.1                   |      |      |       |      |       |  |
| Linearity deviation   | d <sub>lin</sub>   | %       | 0.05                  |      |      |       |      |       |  |
| Temperature effect per 10 K by reference to nominal sensitivity to sensitivity to zero signal | TK <sub>C</sub>    | %       | 0.05                  |      |      |       |      |       |  |
|   | TK <sub>c</sub>    | %       | 0.05                  |      |      |       |      |       |  |
| Effect of transverse forces (transverse force 10 % F <sub>nom</sub> ) <sup>*)</sup>           | d <sub>Q</sub>     | %       | ± 0.1                 |      |      |       |      |       |  |
| Effect of eccentricity at 1 mm  | d <sub>E</sub>     | %       | ± 0.1                 |      |      |       |      |       |  |
| Creep over 30 min   | d <sub>crF+E</sub> | %       | < ± 0.05              |      |      |       |      |       |  |
| Input resistance  | R <sub>e</sub>     | Ω       | > 345                 |      |      |       |      |       |  |
| Output resistance   | R <sub>a</sub>     | Ω       | 300 – 500             |      |      |       |      |       |  |
| Isolation resistance  | R <sub>is</sub>    | GΩ      | > 2x10 <sup>9</sup>   |      |      |       |      |       |  |
| Reference excitation voltage  | t <sub>ref</sub>   | V       | 5                     |      |      |       |      |       |  |
| Operating range of the excitation voltage   | B <sub>U,G,T</sub> | V       | 0.5...12              |      |      |       |      |       |  |
| Nominal temperature range   | B <sub>t,nom</sub> | °C [°F] | +10...+70 [ 50...158] |      |      |       |      |       |  |
| Operating temperature range   | B <sub>t,G</sub>   | °C [°F] | -10...+70 [ 14...158] |      |      |       |      |       |  |
| Storage temperature range   | B <sub>t,S</sub>   | °C [°F] | -30...+85 [-22...185] |      |      |       |      |       |  |
| Reference temperature   | t <sub>ref</sub>   | °C [°F] | +23 [ 73.4]           |      |      |       |      |       |  |
| Maximum operating force   | (F <sub>G</sub> )  | %       | 120                   | 120  | 150  |       |      |       |  |
| Limit force   | (F <sub>L</sub> )  | %       | < 900                 |      |      | < 600 |      | < 300 |  |
| Breaking force  | (F <sub>B</sub> )  | %       | > 1000                |      |      | > 700 |      | > 400 |  |
| Limit torque  | (M <sub>d</sub> )  | Nm      | 0.6                   | 1.5  | 3    | 6     | 15   | 15    |  |
| Static lateral limit force <sup>*</sup>   | (F <sub>Q</sub> )  | %       | 50                    | 100  |      |       |      | 50    |  |
| Nominal displacement  | S <sub>nom</sub>   | mm      | < 0.4                 |      |      |       |      |       |  |
| Fundamental resonance frequency   | f <sub>G</sub>     | kHz     | 0.29                  | 0.49 | 0.76 | 1.09  | 1.81 | 2.45  |  |
| Relative permissible vibrational stress   | F <sub>rb</sub>    | %       | ± 70                  |      |      |       |      |       |  |
| Weight  |                    | kg      | approx. 0.4           |      |      |       |      |       |  |
| Degree of protection to DIN EN 60529  |                    |         | IP65                  |      |      |       |      |       |  |
| Cable length, 6-wire connection   |                    | m       | 3                     |      |      |       |      |       |  |

<sup>\*)</sup> by reference to a force introduction point on the force-introduction surface

## Accessories(option):

|  |  |  |
|--|--|--|
| <p><b>Knuckle eye U1/200 kg/ZGW:</b></p> <p>Dimensions (in mm)</p> |  | <p>Weight: 50 g</p> <p>Material: tempering steel, galvanised; rolled steel and PTFE/bronze fabric foil</p> |
|--|--|--|

Modifications reserved.  
All details describe our products in general form only. They are not to be understood as express warranty and do not constitute any liability whatsoever.

### Hottinger Baldwin Messtechnik GmbH

Postfach 10 01 51, D-64201 Darmstadt  
Im Tiefen See 45, D-64293 Darmstadt  
Tel.: +49/61 51/ 8 03-0; Fax: +49/61 51/ 8039100  
E-mail: support@hbm.com www.hbm.com



measurement with confidence