

FCC 47 CFR PART 15 SUBPART B

TEST REPORT

KST DIGITAL TECHNOLOGY LIMITED

Coreless Servo

Model No.: X12-508

Additional Model No.: DS215MG, DS315MG, DS213MG,  
DS313MG, DS12C, DS12T, X12-306

Prepared for : KST DIGITAL TECHNOLOGY LIMITED  
Address : No.226, Pangu Street, Meixian, Meizhou, Guangdong

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : November 07, 2017  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : November 07, 2017 ~ November 13, 2017  
Date of Report : November 16, 2017

FCC TEST REPORT
FCC 47 CFR PART 15 SUBPART B

Report Reference No. .... : LCS171103069AE

Date Of Issue ..... : November 16, 2017

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure..... : Full application of Harmonised standards [checked]
Partial application of Harmonised standards [unchecked]
Other standard testing method [unchecked]

Applicant's Name ..... : KST DIGITAL TECHNOLOGY LIMITED

Address..... : No.226, Pangu Street, Meixian, Meizhou, Guangdong

Test Specification

Standard..... : FCC 47 CFR Part 15 Subpart B, ANSI C63.4 -2014

Test Report Form No..... : LCSEMC-1.0

TRF Originator ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : Coreless Servo

Trade Mark ..... : KST

Model/ Type Reference ..... : X12-508

Ratings..... : DC 4.8-8.4V

Result ..... : Positive

Compiled by:

Jessica Wu

Jessica Wu / File administrators

Supervised by:

Davey Xu

Davey Xu/ Technique principal

Approved by:



Gavin Liang/ Manager

## FCC -- TEST REPORT

<b>Test Report No. : LCS171103069AE</b>	<u>November 16, 2017</u> Date of issue
---	---

Type / Model..... : X12-508
EUT..... : Coreless Servo
<b>Applicant..... : KST DIGITAL TECHNOLOGY LIMITED</b> Address..... : No.226, Pangu Street, Meixian, Meizhou, Guangdong Telephone..... : / Fax..... : /
<b>Manufacturer..... : KST DIGITAL TECHNOLOGY LIMITED</b> Address..... : No.226, Pangu Street, Meixian, Meizhou, Guangdong Telephone..... : / Fax..... : /
<b>Factory..... : KST DIGITAL TECHNOLOGY LIMITED</b> Address..... : No.226, Pangu Street, Meixian, Meizhou, Guangdong Telephone..... : / Fax..... : /

**Test Result** according to the standards on page 6: **Positive**

The test report merely corresponds to the test sample.  
 It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

### Revision History

Revision	Issue Date	Revisions	Revised By
000	November 16, 2017	Initial Issue	Gavin Liang

## TABLE OF CONTENTS

Test Report Description	Page
<b>1. SUMMARY OF STANDARDS AND RESULTS .....</b>	<b>6</b>
1.1. Description of Standards and Results.....	6
<b>2. GENERAL INFORMATION .....</b>	<b>7</b>
2.1. Description of Device (EUT) .....	7
2.2. Description of Test Facility .....	7
2.3. Statement of the measurement uncertainty.....	7
2.4. Measurement Uncertainty .....	8
<b>3. RADIATED EMISSION MEASUREMENT .....</b>	<b>9</b>
3.1. Test Equipment.....	9
3.2. Block Diagram of Test Setup .....	9
3.3. Radiated Emission Limit (Class B) .....	9
3.4. EUT Configuration on Measurement .....	10
3.5. Operating Condition of EUT .....	10
3.6. Test Procedure .....	10
3.7. Radiated Emission Noise Measurement Result.....	10
<b>4. PHOTOGRAPH.....</b>	<b>12</b>
4.1. Photo of Radiated Measurement .....	12
<b>5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT.....</b>	<b>13</b>

# 1. SUMMARY OF STANDARDS AND RESULTS

## 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC 47 CFR Part 15 Subpart B	Class B	N/A
Radiated disturbance	FCC 47 CFR Part 15 Subpart B	Class B	PASS

N/A is an abbreviation for Not Applicable.

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT : Coreless Servo

Trade Mark : **KST**<sup>®</sup>

Model Number : X12-508

Power Supply : DC 4.8-8.4V

EUT Clock Frequency :  $\leq 15$ MHz

### 2.2. Description of Test Facility

Site Description

EMC Lab. : CNAS Registration Number. is L4595.  
FCC Registration Number. is CN5024.  
Industry Canada Registration Number. is 9642A-1.  
ESMD Registration Number. is ARCB0108.  
UL Registration Number. is 100571-492.  
TUV SUD Registration Number. is SCN1081.  
TUV RH Registration Number. is UA 50296516-001.  
NVLAP Registration Code is 600167-0.

### 2.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 2.4. Measurement Uncertainty

Test	Parameters	Expanded uncertainty ( $U_{lab}$ )	Expanded uncertainty ( $U_{cispr}$ )
Radiated Emission	Level accuracy (9kHz to 30MHz)	$\pm 3.68$ dB	$\pm 2.63$ dB
Radiated Emission	Level accuracy (30MHz to 1000MHz)	$\pm 3.48$ dB	$\pm 2.63$ dB
Radiated Emission	Level accuracy (above 1000MHz)	$\pm 3.90$ dB	N/A

- (1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.
- (2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.




### 3. RADIATED EMISSION MEASUREMENT

#### 3.1. Test Equipment

The following test equipments are used during the radiated emission measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2017-06-17
2	EMI Test Receiver	ROHDE & SCHWARZ	ESR 7	101181	2017-06-17
3	Log per Antenna	SCHWARZBECK	VULB9163	9163-470	2017-04-17
4	EMI Test Software	AUDIX	E3	N/A	2017-06-17
5	Positioning Controller	MF	MF-7082	/	2017-06-17

#### 3.2. Block Diagram of Test Setup

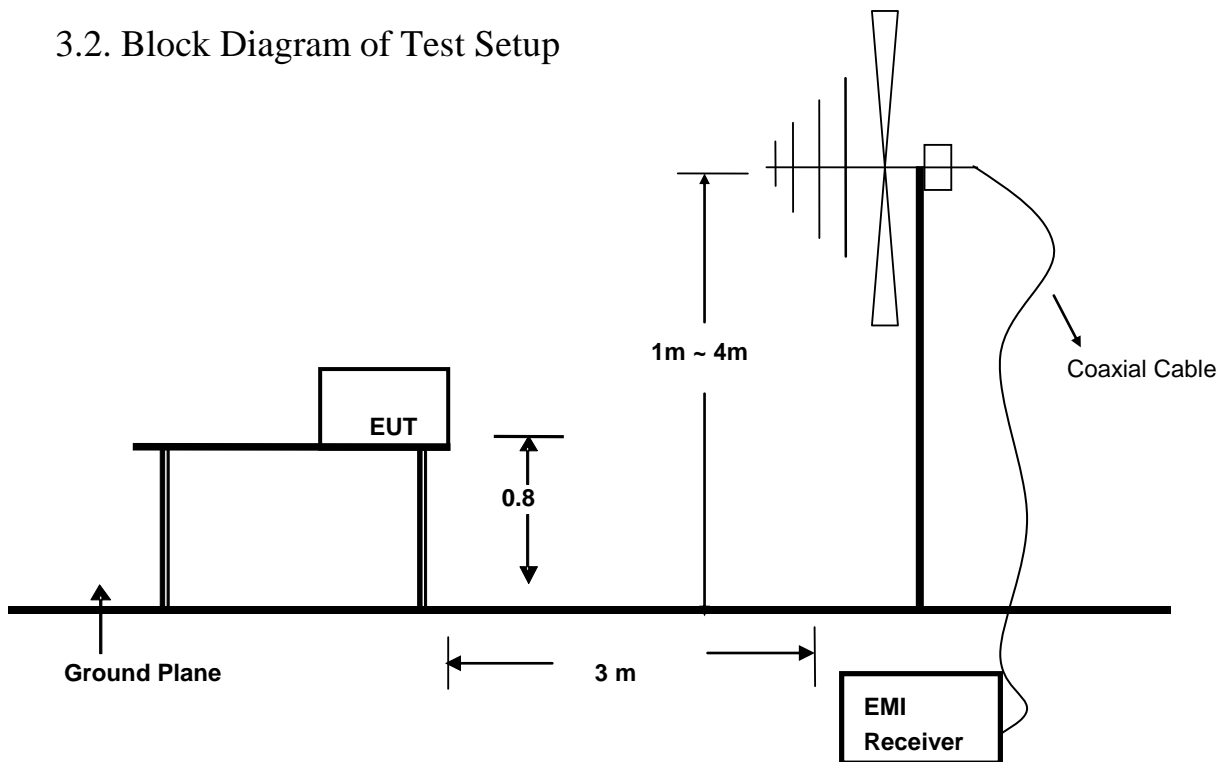

#### 3.3. Radiated Emission Limit (Class B)

Limits for radiated disturbance Blow 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46
960 ~ 1000	3	500	54

Remark : (1) Emission level (dB)μV = 20 log Emission level μV/m  
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

### 3.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in Section 3.2.

3.5.2. Let the EUT work in test mode (on) and measure it.

### 3.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2009 on radiated emission measurement.

The bandwidth of the EMI test receiver is set at 120kHz, 1000kHz.


The frequency range from 30MHz to 1000MHz is checked.

### 3.7. Radiated Emission Noise Measurement Result

**PASS.**

The scanning waveforms please refer to the next page.


<b>Model No.</b>	X12-508	<b>Test Mode</b>	ON
<b>Environmental Conditions</b>	24.1°C, 54.3% RH	<b>Detector Function</b>	Quasi-peak
<b>Pol</b>	Vertical	<b>Distance</b>	3m
<b>Test Engineer</b>	Sunny Chen		

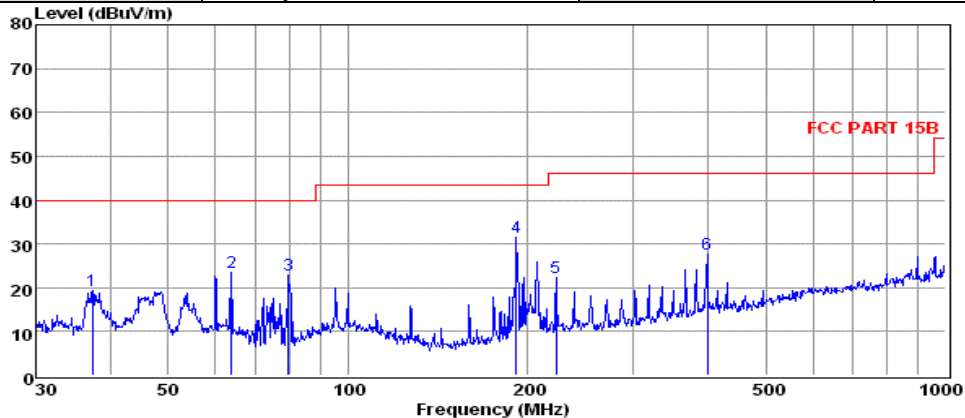

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	37.29	5.91	0.41	12.89	19.21	40.00	-20.79	QP
2	63.76	11.78	0.48	11.20	23.46	40.00	-16.54	QP
3	79.52	13.86	0.65	8.47	22.98	40.00	-17.02	QP
4	191.07	20.08	0.86	10.56	31.50	43.50	-12.00	QP
5	222.95	9.98	0.95	11.33	22.26	46.00	-23.74	QP
6	399.03	11.30	1.22	15.04	27.56	46.00	-18.44	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that at 20db blow the official limit are not reported

<b>Model No.</b>	X12-508	<b>Test Mode</b>	ON
<b>Environmental Conditions</b>	24.1°C, 54.3% RH	<b>Detector Function</b>	Quasi-peak
<b>Pol</b>	Horizontal	<b>Distance</b>	3m
<b>Test Engineer</b>	Sunny Chen		

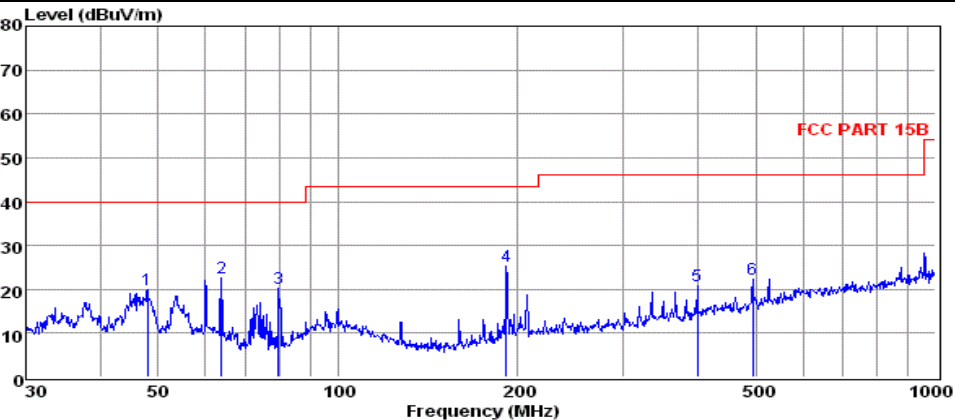


	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	47.99	6.09	0.35	13.37	19.81	40.00	-20.19	QP
2	63.76	11.02	0.48	11.20	22.70	40.00	-17.30	QP
3	79.52	10.96	0.65	8.47	20.08	40.00	-19.92	QP
4	191.07	13.93	0.86	10.56	25.35	43.50	-18.15	QP
5	399.03	4.46	1.22	15.04	20.72	46.00	-25.28	QP
6	494.20	4.24	1.50	16.43	22.17	46.00	-23.83	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that at 20db blow the official limit are not reported

Note: Pre-Scan all mode, Thus record worse case mode result in this report.

## 4. PHOTOGRAPH

### 4.1. Photo of Radiated Measurement

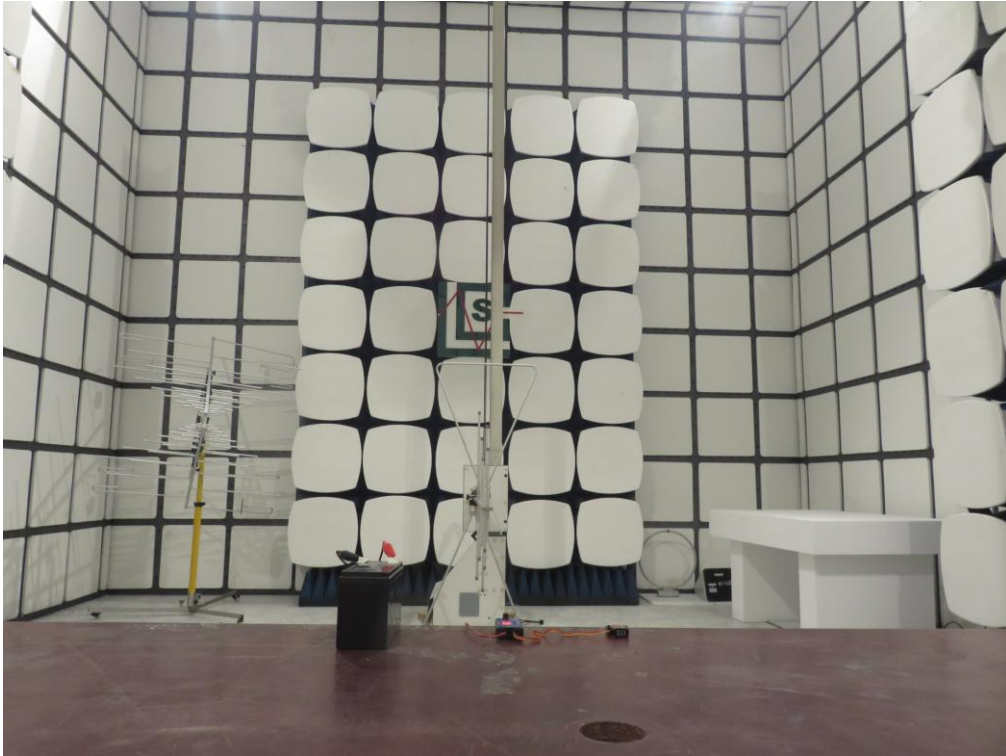

### 5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

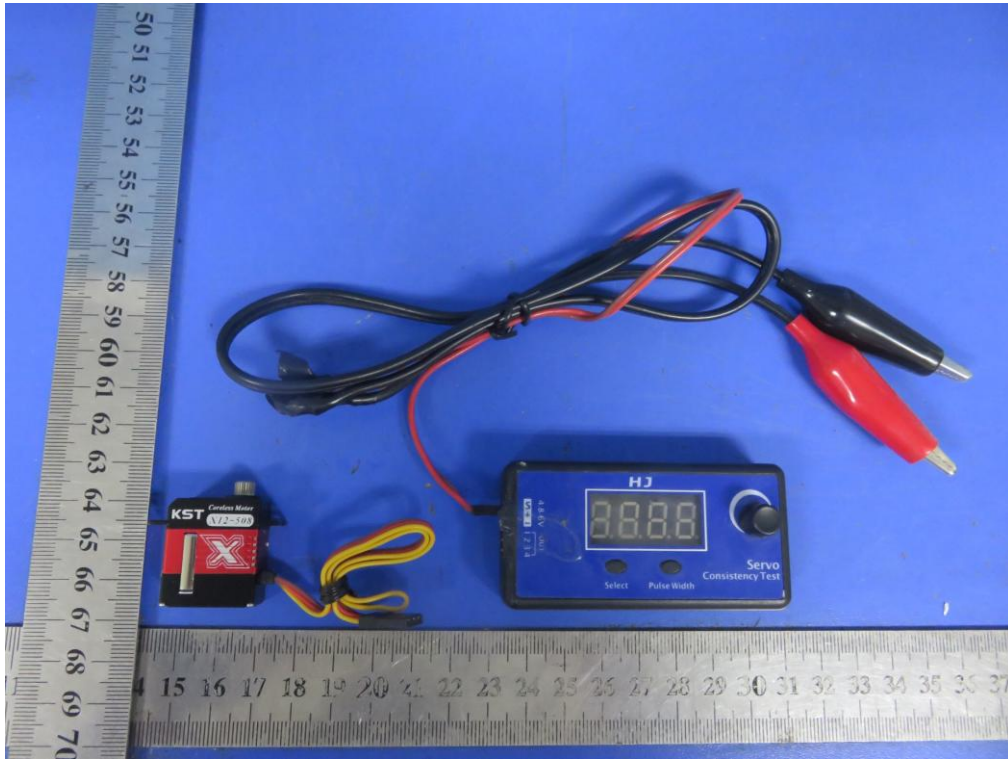


Fig. 1

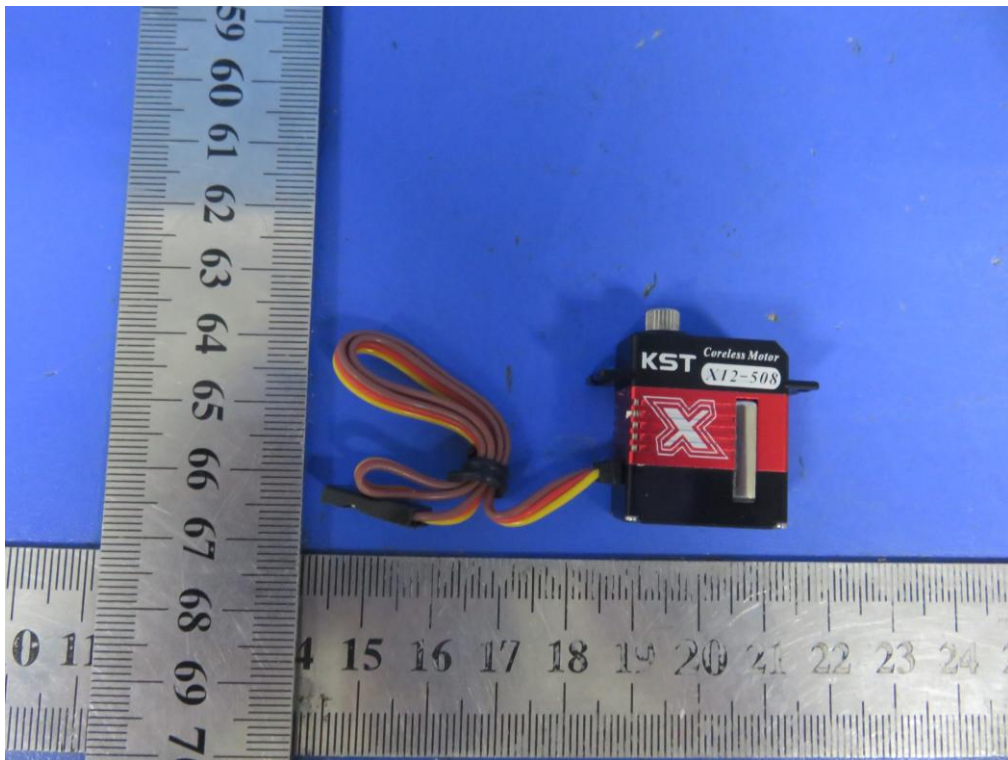


Fig. 2

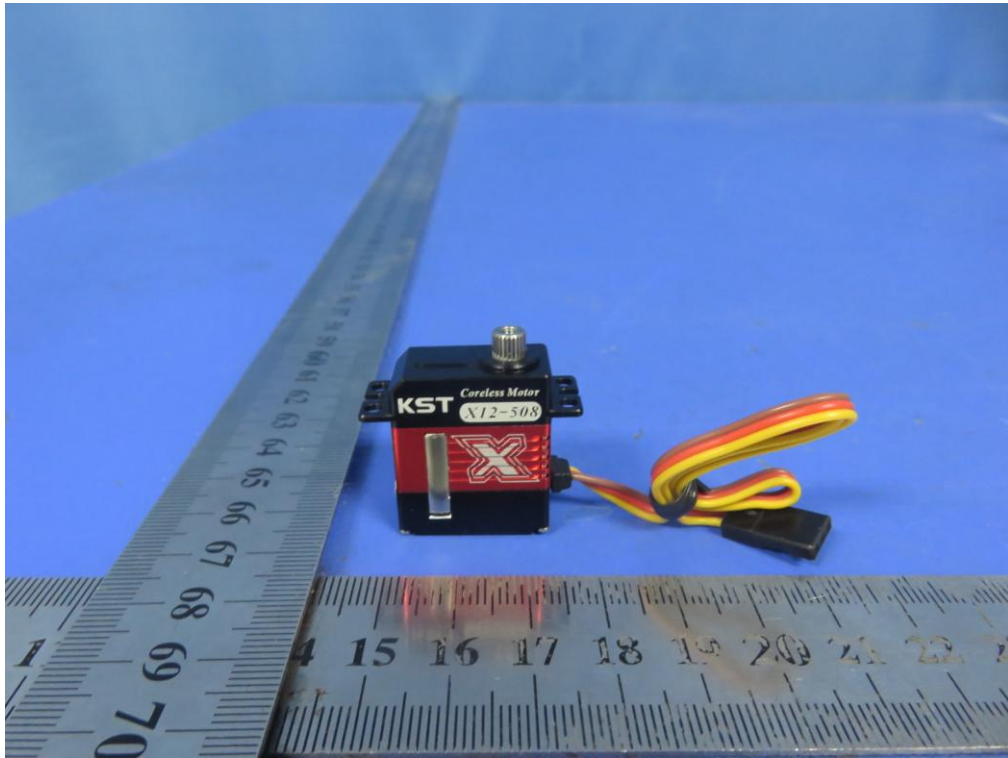


Fig. 3

-----THE END OF TEST REPORT-----