

Damper actuator , ON/OFF Control , 0-95° Output angle , Autoprotection system , Working range modulable , Universal coupling



TECHNICAL DATA

技术参数

电源	Power supply	AC230V,AC/DC24V,AC120V	
允差	Allow error	± 10%	
输出力矩	Output torque	5N.m	
运行时间	Run time (Motor drive)	50...60s	
复位时间	Spring return time	15...20s	
运行功耗	Operating power	6...8VA	
堵转功耗	Standstill power	3VA	
输出角度	Output angle	90°(95°Max)	
控制信号	Control signal	SES...	2point on/off control
		SEF...	3 P oint on/off control
适用轴径	Universal coupling	Ø 10...16mm or □ 7...11mm	
过载保护	Overload protection	Automatic	
防护等级	Protection class	IP54	
使用环境	Ambient conditions	-10...+55°C 0...90%Rh	
最大噪音	Noise level:	Motor	50dB(A)
		Spring	65dB(A)
净重	Weight	1.3...1.7kg	

BASIC FEATURES

基本型功能表

Type	Output(Hold) Torque	Voltage	Control Signal	Operating Power	Standstill Power	RunTime	Return Time	Output Angle
SES05-230-R	05 N.m	AC230V	2 Point on/off control	6...8 VA	3 VA	50...60 s	15...20 s	0...95°
SES05-24-R	05 N.m	AC/DC24V	2 Point on/off control	6...8 VA	3 VA	50...60 s	15...20 s	0...95°
SES05-120-R	05 N.m	AC120V	2 Point on/off control	6...8 VA	3 VA	50...60 s	15...20 s	0...95°
SEF05-230-R	05 N.m	AC230V	3 Point on/off control	6...8 VA	3 VA	50...60 s	15...20 s	0...95°
SEF05-24-R	05 N.m	AC/DC24V	3 Point on/off control	6...8 VA	3 VA	50...60 s	15...20 s	0...95°
SEF05-120-R	05 N.m	AC120V	3 Point on/off control	6...8 VA	3 VA	50...60 s	15...20 s	0...95°


OPTIONAL FUNCTION

扩展功能


Type	Feature Descriptions
SE...-...P-R	CW a potentiometer (10Kohm) 内附反馈电位器(10Kohm)
SE...-...S-R	CW 2 microswitches(3A,AC250V) 内附2只无源微动开关(2组转换接点,容量:3A,AC250V)

DIMENSIONS

安装尺寸

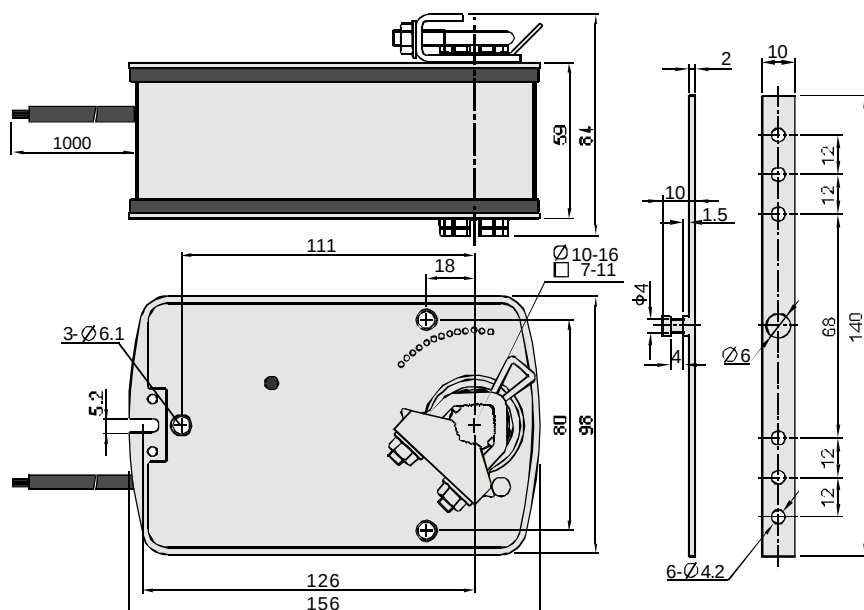

WIRING DESCRIPTIONS 电气接线

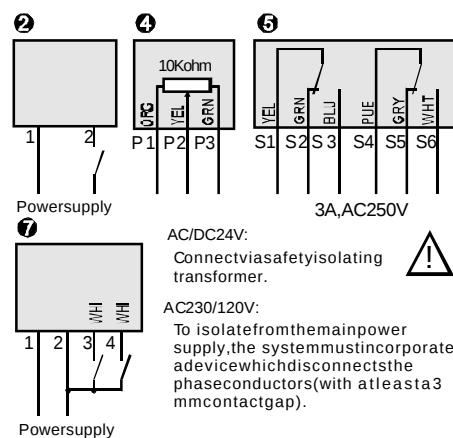

Wiring diagrams		Powersupply	Wirecolor
SES/SEF . . -24-R	2/ 7	AC/DC24V	1-BLK 2-RED
SES/SEF . . -230-R	2/ 7	AC230V	1-BLU 2-BRN
SES/SEF . . -120-R	2/ 7	AC120V	1-BLU 2-BRN
SES/SEF . . -...P-R	+ 4		
SES/SEF . . -...S-R	+ 6		