

Damper actuator, Modulating Control, 0-95° Output angle, Autoprotectionsystem, Working range modulable, Universalcoupling
连续信号控制电动执行器 0-95°角行程 可调工作范围 全行程过载保护 万能联轴器输出



TECHNICAL DATA

技术参数

电源	Power supply	AC230V,AC/DC24V,AC120V
允差	Allow error	± 10%
输出力矩	Output torque	6N.m 10N.m
运行时间	Run time	30S...150s
运行功耗	Operating power	6VA
堵转功耗	Standstill power	1...2VA
输出角度	Output angle	90°(95°Max)
控制信号	Control signal	DC0(2)...10V DC0(4)...20mA
反馈信号	Feedback signal	DC0(2)...10V
适用轴径	Universal coupling	Ø 10...16mm or □ 5...11mm
过载保护	Overload protection	Automatic
防护等级	Protection class	IP54
使用环境	Ambient conditions	-10...+55°C 0...90%Rh
最大噪音	Noise level(max)	40dB(A)
净重	Weight	0.8...1.2kg

BASIC FEATURES

基本型功能表

Type	Output(Hold) Torque	Voltage	Control Signal	Operating Power	Standstill Power	Run Time	OutputAngle
SEM06/10-230	06/10 N.m	AC230V	DC0(2)...10V/0(4)...20mA	5...8 VA	2...8 VA	30...150s	0...95°
SEM06/10-24	06/10 N.m	AC/DC24V	DC0(2)...10V/0(4)...20mA	5...8 VA	2...8 VA	30...150s	0...95°
SEM06/10-120	06/10 N.m	AC120V	DC0(2)...10V/0(4)...20mA	5...8 VA	2...8 VA	30...150s	0...95°


OPTIONAL FUNCTION

扩展功能


Type	Feature Descriptions
SE...06-...S	CW a microswitch(3A,AC250V) 内附2只无源微动开关(一组转换接点容量3A,AC250V)
SE...10-...S	CW a microswitch(3A,AC250V) 内附2只无源微动开关(一组转换接点容量3A,AC250V)

DIMENSIONS

安装尺寸

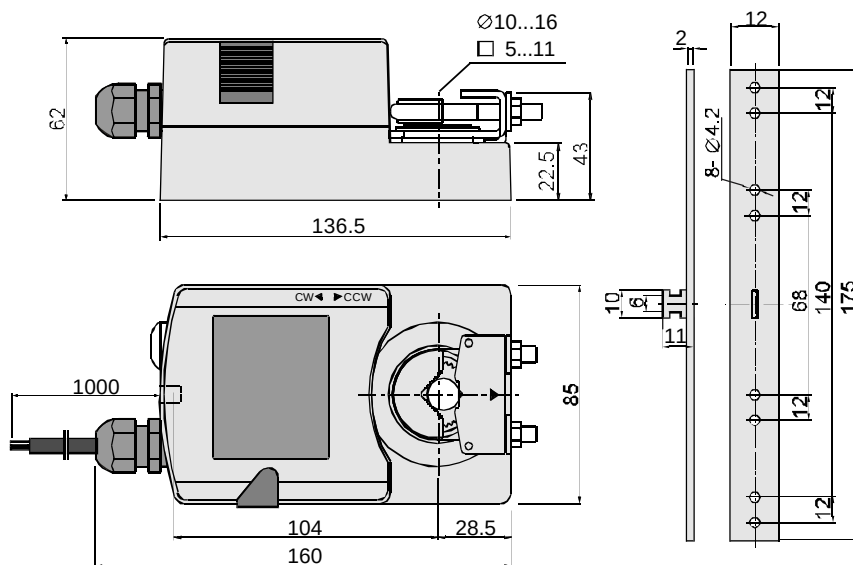

WIRING DESCRIPTIONS 电气接线

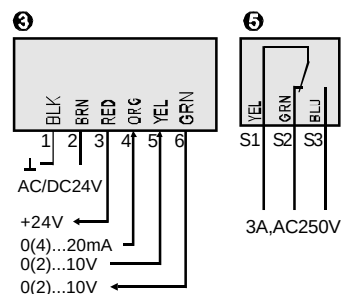

 **AC/DC24V:** Connect via safety isolating transformer.

Wiring diagrams		Powersupply
SEM -24	③	AC/DC24V
SEM - ...S	③ + ⑤	