

Damper actuator, Modulating Control, 0-95° Output angle, Autoprotectionsystem, Working range modulable, Universalcoupling
连续信号控制电动执行器 0-95°角行程 可调工作范围 全行程过载保护 万能联轴器输出

TECHNICAL DATA

技术参数



电源	Power supply	AC/DC24V
允差	Allow error	± 10%
输出力矩	Output torque	2N.m 4 N.m
运行时间	Run time	80S...150s
运行功耗	Operating power	4VA
堵转功耗	Standstill power	1...4VA
输出角度	Output angle	90°(95°Max)
控制信号	Control signal	DC0(2)...10V
反馈信号	Feedback signal	DC0(2)...10V
适用轴径	Universal coupling	Ø 6...16mm or □ 5...11mm
过载保护	Overload protection	Automatic
防护等级	Protection class	IP54
使用环境	Ambient conditions	-10...+55°C 0...90%Rh
最大噪音	Noise level(max)	40dB(A)
净重	Weight	0.8...1.2kg

BASIC FEATURES

基本型功能表

[illegible]


OPTIONAL FUNCTION

扩展功能


Type	Feature Descriptions
SE...02-...S	CW a microswitch(3A,AC250V) 内附1只无源微动开关(一组转换接点容量3A,AC250V)
SE...04-...S	CW a microswitch(3A,AC250V) 内附1只无源微动开关(一组转换接点容量3A,AC250V)

DIMENSIONS

安装尺寸

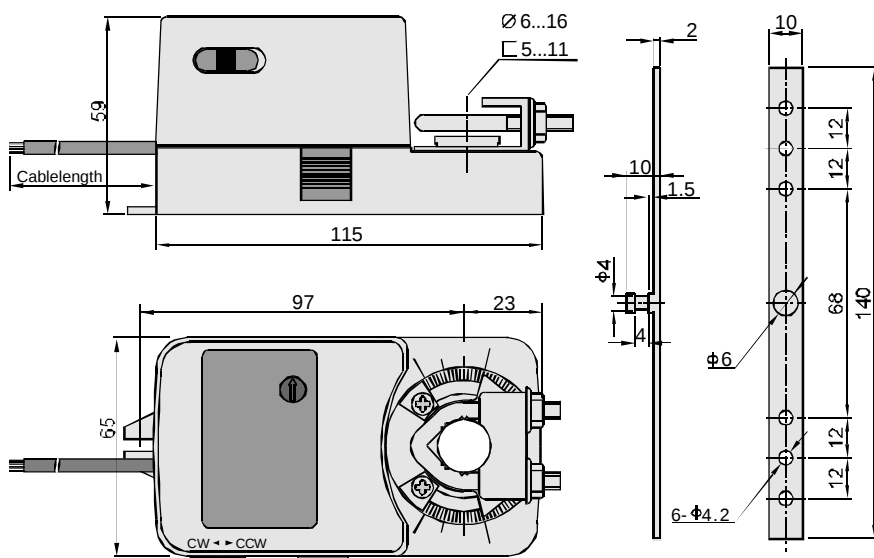

WIRING DESCRIPTIONS 电气接线

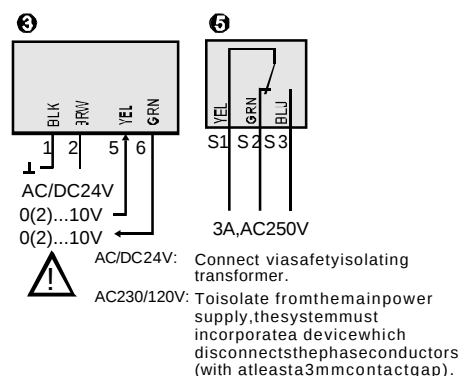

Wiring diagrams		Powersupply
SEM -24	③	AC/DC24V
SEM - ...S	③ + ⑤	