



FEATURES

3U x 42TE x 310mm
INPUT : 10 - 20Vdc
OUTPUT : 24Vdc 600W
Efficiency : 77 % typ.
Air forced

APPLICATIONS

Test bench.

INPUT

Voltage range : 10 - 20Vdc
Nominal : 12 Vdc
Input protection : fuse
transient, surges and reverse polarity protected

OUTPUT

Output : 24Vdc 600W
12 x 24V 50W in parallel operation

| | V1 | | Conditions |
|------------------|--------------------|------|---|
| | Typ. | Max. | |
| Line regulation | 2 % | 5 % | Low line to high line ; full load |
| Load regulation | 2 % | 5 % | 10 % to full load |
| Ripple and noise | 2 % | | Peak to peak - Bandwidth 20MHz according to o/p voltage |
| Current limit | 150 % of I nominal | | Vout = 95 % of nominal ; Automatic restart |

SIGNALS

ON/OFF : Switch in rear panel. Inhibition of the output

Input OK : 4 leds in front panel

Output OK : 12 leds in front panel

ENVIRONMENTAL

Storage temperature : -40°C to +85°C

Operating temperature : 0°C to +40°C ambient, nominal power

ISOLATION

Input to Chassis : 1500 Vdc

Input to Output : 1500 Vdc


Output to Chassis : >100 Mohms at 500 Vdc

GENERAL

Safety : built to meet EN60950

EMI : built to meet EN55022A, conducted.

MECHANICALS

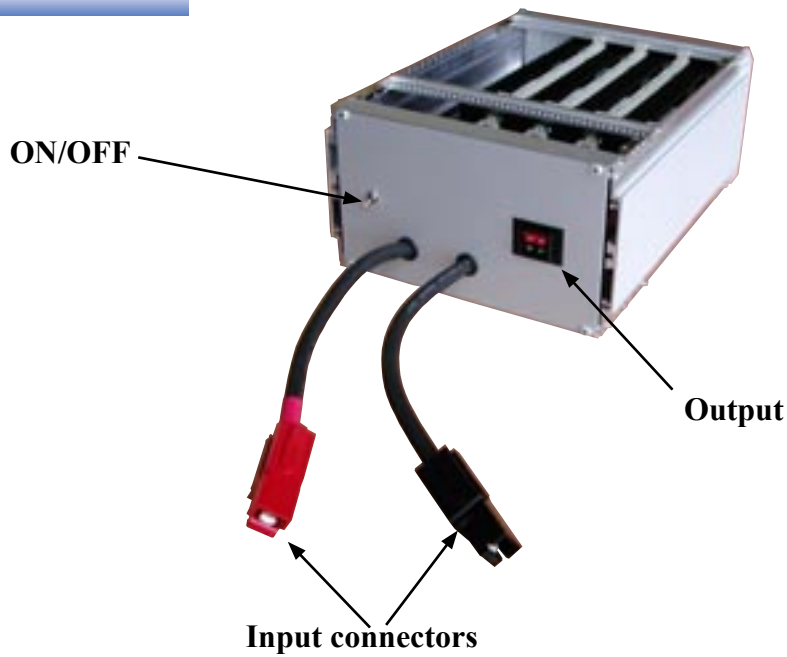

Input : Power connector ANDERSON PP120 serie

| PIN | DESCRIPTION |
|-------|-------------|
| Red | +Vin |
| Black | -Vin |

Output : ANDERSON TH030 serie

| PIN | DESCRIPTION |
|-------|-------------|
| Red | +V1 |
| Red | +V1 |
| Black | -V1 |
| Black | -V1 |

Note : PINS above must be connected in parrallel
externaly to provid 24Vdc 600W