

EPS-1290

900W



Application Reference

- Pedestal Server/Workstation, Gaming PC



Features



Electrical Specifications

- Input Voltage 90 ~ 264 VAC
Auto Voltage Sensing
- Frequency 47 ~ 63 Hz
- Input current 15 Arms @ 100 VAC
8 Arms @ 240 VAC
- Holdup Time > 17 ms @
75% Load

Environmental Specifications

- Operating/Storage Temp. 0~40°C/-20~60°C
- Operating/Storage Humidity 85% / 95%
- Operating/Storage Altitude 10,000/50,000 FT
- MTBF 100,000 HRS
- Safety Approvals cUL, TUV, CB
- EMC Regulations FCC, CE


Output Specifications

Voltage	Regulation Load	Minimum Load	Maximum Load	Peak
+3.3V	+/- 3%	0A	20.0A	--
+5.0V	+/- 3%	0.5A	25.0A	--
+12.0V1	+/- 3%	0.1A	25.0A	26.0A
+12.0V2	+/- 3%	0A	25.0A	26.0A
+12.0V3	+/- 3%	0A	35.0A	35.0A
+12.0V4	+/- 3%	0A	28.0A	28.0A
-12.0V	+/- 10%	0A	0.5A	0.5A
+5 Vsb	+/- 3%	0.1A	2.0A	2.5A

(*) Total maximum combines load output on +3.3V and +5V rails should not exceed 180 Watts.

(**) The maximum total combined output current on 12V rail is 80A at Nominal and 85A at Peak Load.

ATX&EPS12V


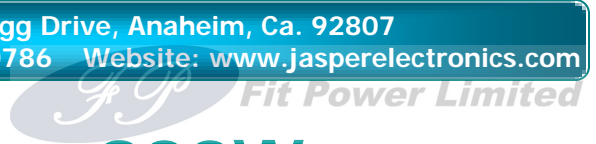



EPS-1290

900W

Mechanical Drawing

ATX&EPS12V

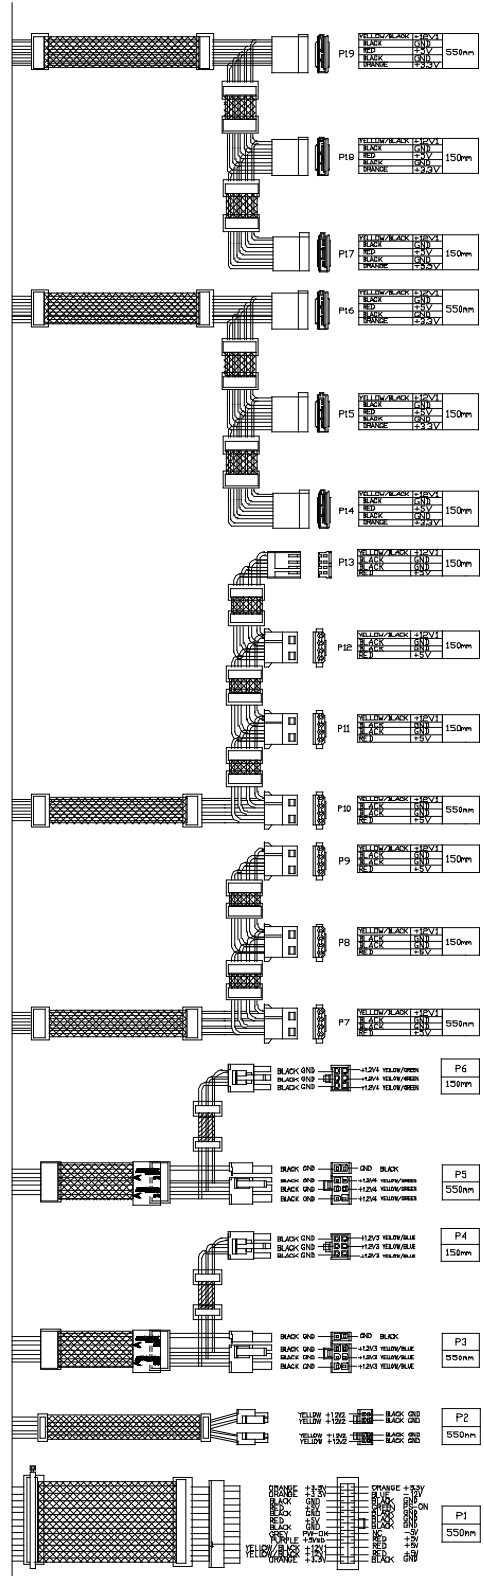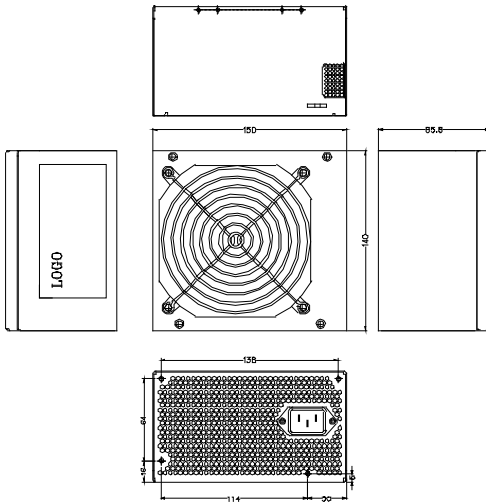

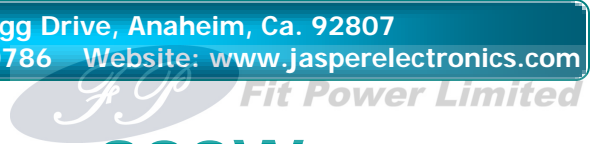


EPS-1290

900W

Wire Harness

Description

P1 - Main Power



P2 - 8 Pin CPU-VR Power Connector



P3, P5 - PCI-Exp 8 Pin Power Connector



P4, P6 - PCI-Exp 8 Pin Power Connector



P7 - P12- Peripheral



P13 - Floppy



P14- P19 - SATA



Connector Housing

Molex 44476-1111 or equivalent (20|4 Split)

1	Orange	+3.3V	13	Orange	+3.3V
2	Orange	+3.3V	14	Blue	-12VDC
3	Black	GND	15	Black	GND
4	Red	+5V	16	Green	PS_ON
5	Black	GND	17	Black	GND
6	Red	+5V	18	Black	GND
7	Black	GND	19	Black	GND
8	Gray	PWR OK	20	N/E	Reserved
9	Purple	5 VSB	21	Red	+5V
10	Yellow/Black	+12V1	22	Red	+5V
11	Yellow/Black	+12V1	23	Red	+5V
12	Orange	+3.3V	24	Black	GND

Molex 44476-1111 or equivalent (4|4 Split)

1	Black	GND	5	Yellow/Black	+12V2
2	Black	GND	6	Yellow/Black	+12V2
3	Black	GND	7	Yellow/Black	+12V2
4	Black	GND	8	Yellow/Black	+12V2

Molex 45559-0002 or equivalent (6|2 Split)

1	Yellow*	+12V3, +12V4	5	Black	GND
2	Yellow*	+12V3, +12V4	6	Black	GND
3	Yellow*	+12V3, +12V4	7	Black	GND
4	Black	GND	8	Black	GND

Molex 45559-0002 or equivalent

1	Yellow*	+12V3, +12V4	4	Black	GND
2	Yellow*	+12V3, +12V4	5	Black	GND
3	Yellow*	+12V3, +12V4	6	Black	GND

*Yellow/Blue Stripe: +12V3, Yellow/Green stripe: +12V4

Molex 8981-04P of Equivalent

1	Yellow/Black	+12V1
2	Black	GND
3	Black	GND
4	Red	+5V

AMP 171822-4 or Equivalent

1	Red	+5V
2	Black	GND
3	Black	GND
4	Yellow/Black	+12V1

Molex 89751 or Equivalent

1	Yellow/Black	+12V1
2	Black	GND
3	Red	+5V
4	Black	GND
5	Orange	+3.3V

Dimension (WxLxH)

- 150 x 140 x 86 (mm)
- 5.9 x 5.5 x 3.38 (inch)

Cooling Fan

- 12V DC, 120mm

Notes

• Pictures, drawing and specification subject to change without notice. All new processors support will be updated once official announced by vendors

•All company logo and legal name belong to original company. All copyright reserved by Enhance Electronics.

•One-Year Standard Warranty

•Last Update: 9/30/2009

ATX&EPS12V