







ParameterDetailsMinOutput voltage rangeEach channel5Rated currentEach channel1Rated powerEach channel1Initial voltage accuracyFactory set units-1Manual Voltage Adjust11 turn potentiometer-50Load RegulationMeasured at sense terminals-50Line RegulationMeasured at sense terminals-0.1Cross RegulationMeasured at sense terminals-0.2Minimum Load-0.2-0.2Transient response (Vset = 5V)20MHz BW, pk-pkTurn on rise timeMonotonic 10% to 90%1.5Turn on delayAC to PG En to PG105Holdup voltage-0.2-0.2Short circuit protection (Hiccup mode)Hiccup mode only105Short circuit protection (Hiccup mode)Latching-0.2Over voltage protection (Hiccup mode)Latching115Power Good thresholdsHigh and Low window68Reliability25°C, 100% load, Telcordia20Warranty Wire SizeLatching115	Т	Max	
Rated currentEach channelRated powerEach channelInitial voltage accuracyFactory set unitsManual Voltage Adjust11 turn potentiometerLoad RegulationMeasured at sense terminalsLine RegulationMeasured at sense terminalsCross RegulationMeasured at sense terminalsCross RegulationMeasured at sense terminalsCross RegulationMeasured at sense terminalsCross Regulation20MHz BW, pk-pkTemperature coefficient20MHz BW, pk-pkRipple and Noise20MHz BW, pk-pkVest25% to 75% load transient at 1A/uS Recovery to within 10% of VsetTurn on rise timeMonotonic 10% to 90%Turn on delayAC to PG En to PGHoldup voltageInterninalOver current protectionHiccup mode onlyReverse current protectionPeriod Duty cycleOver voltage protectionLatchingOver Temperature protectionInternally monitored. LatchingPower Good thresholdsHigh and Low windowReliability25°C, 100% load, Telcordia	Тур	Max	Units V
Rated powerEach channelIInitial voltage accuracyFactory set units-1Manual Voltage Adjust11 turn potentiometerLoad RegulationMeasured at sense terminals-50Line RegulationMeasured at sense terminals-0.1Cross RegulationMeasured at sense terminals-0.2Minimum Load0.2Temperature coefficient20MHz BW, pk-pk-0.2Ripple and Noise20MHz BW, pk-pk-0.2Transient response 	12	15	
Initial voltage accuracyFactory set units-1Manual Voltage Adjust11 turn potentiometer-50Load RegulationMeasured at sense terminals-50Line RegulationMeasured at sense terminals-0.1Cross RegulationMeasured at sense terminals-0.2Minimum Load-0.2-0.2Temperature coefficient-0.02Ripple and Noise20MHz BW, pk-pkTransient response (Vset = 5V)25% to 75% load transient at 1A/uS Recovery to within 10% of VsetTurn on rise timeMonotonic 10% to 90%1.5Turn on delayAC to PG En to PG105Holdup voltageInternainal105Reverse current protectionNone105Short circuit protection (Hiccup mode)Latching115Over voltage protection protectionLatching115Power Good thresholdsHigh and Low window68Reliability Warranty25°C, 100% load, Telcordia115		5	A
Manual Voltage Adjust11 turn potentiometer	60	75	Watts
Load RegulationMeasured at sense terminals50Line RegulationMeasured at sense terminals-0.1Cross RegulationMeasured at sense terminals-0.2Minimum LoadMeasured at sense terminals-0.2Temperature coefficient-0.02Ripple and Noise20MHz BW, pk-pkTransient response (Vset = 5V)25% to 75% load transient at 1A/uS Recovery to within 10% of VsetTurn on rise timeMonotonic 10% to 90%Turn on delayAC to PG En to PGHoldup voltage105Reverse current protectionNoneShort circuit protection (Hiccup mode)LatchingOver voltage protection protectionLatchingOver Good thresholdsHigh and Low windowReliability warranty25°C, 100% load, Telcordia		1	%
Load Regulationterminals-50Line RegulationMeasured at sense terminals-0.1Cross RegulationMeasured at sense terminals-0.2Minimum Load-0.2Temperature coefficient-0.02Ripple and Noise20MHz BW, pk-pkTransient response (Vset = 5V)25% to 75% load transient at 1A/uS Recovery to within 10% of VsetTurn on rise timeMonotonic 10% to 90%Turn on overshoot-0.2Turn on delayAC to PG En to PGHoldup voltage-0.2Isolation to groundEach terminalReverse current protectionNoneShort circuit protection (Hiccup mode)LatchingOver voltage protection protectionLatchingOver Good thresholdsHigh and Low windowReliability Warranty25°C, 100% load, Telcordia	0.9		V/turn
Line Regulationterminals-0.1Cross RegulationMeasured at sense terminals-0.2Minimum Load-0.02Temperature coefficient-0.02Ripple and Noise20MHz BW, pk-pkTransient response (Vset = 5V)25% to 75% load transient at 1A/uS Recovery to within 10% of VsetTurn on rise timeMonotonic 10% to 90%Turn on overshoot-0.2Turn on delayAC to PG En to PGHoldup voltage-0.2Isolation to groundEach terminalReverse current protectionNoneShort circuit protection (Hiccup mode)LatchingOver voltage protection protectionLatchingOver Good thresholdsHigh and Low windowReliability25°C, 100% load, TelcordiaWarranty-0.2		50	mV
Cross Regulation-0.2Minimum LoadterminalsTemperature coefficient-0.02Ripple and Noise20MHz BW, pk-pk25% to 75% load transient at 1A/uS25% to 75% load transient at 1A/uSTransient response (Vset = 5V)25% to 75% load transient at 1A/uSTurn on rise timeMonotonic 10% to 90%1.5Turn on overshootAC to PG En to PG1.5Turn on delayEach terminal0Holdup voltage105105Short circuit protection (Hiccup mode)Period Duty cycle105Over voltage protection protectionLatching115Over Good thresholdsHigh and Low window68Reliability25°C, 100% load, Telcordia Warranty105		0.1	%Vnom
Temperature coefficient-0.02Ripple and Noise20MHz BW, pk-pkTransient response25% to 75% load transient at 1A/uS(Vset = 5V)Recovery to within 10% of VsetTurn on rise timeMonotonic 10% to 90%Turn on overshootAC to PG En to PGTurn on delayEach terminalHoldup voltage105Over current protectionHiccup mode onlyReverse current protectionPeriod Duty cycleShort circuit protection (Hiccup mode)LatchingOver voltage protection protectionLatchingOver Good thresholdsHigh and Low windowReliability warranty25°C, 100% load, Telcordia		0.2	%Vnom
Ripple and Noise20MHz BW, pk-pkTransient response (Vset = 5V)25% to 75% load transient at 1A/uS Recovery to within 10% of VsetTurn on rise timeMonotonic 10% to 90%Turn on overshoot4Turn on delayAC to PG En to PGHoldup voltage1.5Over current protectionHiccup mode onlyReverse current protectionPeriod Duty cycleShort circuit protection (Hiccup mode)LatchingOver voltage protection protectionLatchingOver Good thresholdsHigh and Low windowReliability protection25°C, 100% load, Telcordia		0	Watts
Transient response (Vset = 5V)25% to 75% load transient at 1A/uS Recovery to within 10% of VsetTurn on rise timeMonotonic 10% to 90%1.5Turn on overshoot		0.02	%/°C
Transient response (Vset = 5V)at 1A/uS Recovery to within 10% of VsetTurn on rise timeMonotonic 10% to 90%1.5Turn on overshootTurn on delayAC to PG En to PG-Holdup voltageIsolation to groundEach terminal105Over current protectionHiccup mode only105Reverse current protectionPeriod Duty cycle-Short circuit protection (Hiccup mode)Latching-Over voltage protectionLatching115Power Good thresholdsHigh and Low window68Reliability25°C, 100% load, Telcordia-		2	%Vset
VsetVsetTurn on rise timeMonotonic 10% to 90%1.5Turn on overshoot		1	v
Turn on overshootAC to PG En to PGTurn on delayAC to PG En to PGHoldup voltage		100	uS
Turn on delayAC to PG En to PGHoldup voltageEn to PGIsolation to groundEach terminalOver current protectionHiccup mode onlyReverse current protectionNoneShort circuit protection (Hiccup mode)Period Duty cycleOver voltage protection protectionLatchingOver Good thresholdsHigh and Low windowReliability25°C, 100% load, Telcordia Warranty		3.5	mS
Turn on delayEn to PGHoldup voltageEn to PGIsolation to groundEach terminalOver current protectionHiccup mode onlyReverse current protectionNoneShort circuit protection (Hiccup mode)Period Duty cycleOver voltage protection protectionLatchingOver Temperature protectionInternally monitored. LatchingPower Good thresholdsHigh and Low windowReliability Warranty25°C, 100% load, Telcordia		0.1	%Vset
Holdup voltageEn to PGHoldup voltageIsolation to groundEach terminalOver current protectionHiccup mode onlyReverse current protectionNoneShort circuit protection (Hiccup mode)Period Duty cycleOver voltage protectionLatchingOver Temperature protectionInternally monitored. LatchingPower Good thresholdsHigh and Low windowReliability25°C, 100% load, Telcordia Warranty	600	750	mS
Isolation to groundEach terminalOver current protectionHiccup mode only105Reverse current protectionNone105Short circuit protection (Hiccup mode)Period Duty cycle105Over voltage protectionLatching115Over Temperature protectionInternally monitored. Latching115Power Good thresholdsHigh and Low window68Reliability Warranty25°C, 100% load, Telcordia115	30	40	mS
Over current protection Reverse current protectionHiccup mode only105Reverse current protectionNone105Short circuit protection (Hiccup mode)Period Duty cycle115Over voltage protectionLatching115Over Temperature protectionInternally monitored. Latching115Power Good thresholdsHigh and Low window68Reliability Warranty25°C, 100% load, Telcordia Warranty115		12	V
Reverse current protectionNoneShort circuit protection (Hiccup mode)Period Duty cycleOver voltage protectionLatchingOver Temperature protectionInternally monitored. LatchingPower Good thresholdsHigh and Low windowReliability Warranty25°C, 100% load, Telcordia		250	V
protectionNoneShort circuit protection (Hiccup mode)Period Duty cycleOver voltage protectionLatchingOver Temperature protectionInternally monitored. LatchingPower Good thresholdsHigh and Low windowReliability Warranty25°C, 100% load, Telcordia		130	%rated
Short circuit protection (Hiccup mode)Duty cycleOver voltage protectionLatchingOver Temperature protectionInternally monitored. LatchingPower Good thresholdsHigh and Low windowReliability Warranty25°C, 100% load, Telcordia			
(Hiccup mode)Duty cycleOver voltage protectionLatchingOver Temperature protectionInternally monitored. LatchingPower Good thresholdsHigh and Low windowReliability25°C, 100% load, TelcordiaWarrantyItel and the second sec	30		mS
Over Temperature protectionInternally monitored. Latching115Power Good thresholdsHigh and Low window68Reliability25°C, 100% load, Telcordia Warranty68	1		%
protectionLatching115Power Good thresholdsHigh and Low window68Reliability25°C, 100% load, TelcordiaWarranty	20		V
Reliability 25°C, 100% load, Telcordia Warranty		125	°C
Warranty		120	%Vset
Warranty		1	FPMH
,		2	Years
	18	10	AWG
Weight		60	Grams
Size 60mm x 35mm x 17mm			

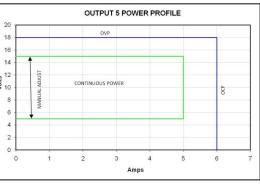

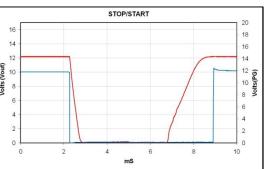

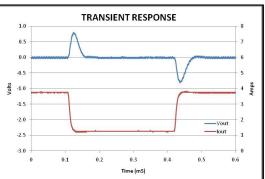

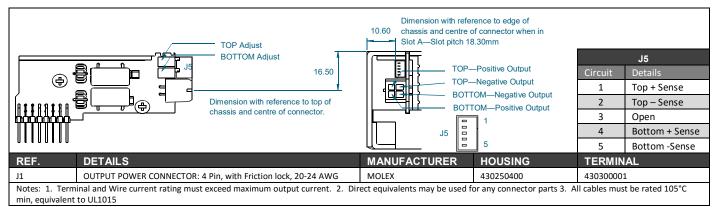

Vox Power Ltd. reserves the right to change or improve any part of the specification, electrical or mechanical design or manufacturing process without notice. Please consult your local distributor or contact Vox Power to ensure that you have the latest specification before using your product. For other information relating to the use of the product please refer to the latest NEVO user manual. Vox Power reserves the right to make changes without notice to any of its products. Vox Power does not assume any liability arising out of the use or application of any of its products and of any information relating to the use of the maximum extent permitted by law. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vox Power. VOX POWER DISCLAIMS ALL WARRANTIES, AND REPRESENTATIONS. IN PARTICULAR ALL OTHER WARRANTIES, CONDITION OR TERMS RELATING TO SUITABILITY, FITNESS FOR PURPOSE, MECHANTABILITY OR CONDITION OF THE PRODUCTS AND WHETHER EXPRESS OR IMPLIED BY STATURE OR COMMON LAW OR OTHERWISE ARE EXCLUDED.

Vox Power Ltd. Unit 2 Red Cow Interchange Estate Ballymount Dublin 24, Ireland Tel: +353 1 4591161, Fax: +353 1 633 5511 Web: ww.vox-power.com

## Distributed By: 上海佳舍珀电子科技有限公司

- 电话: 021-61999334 · 13764303579
- 传真: 021-33250334
- 电邮: roman.xiao@fitpower.cn
- 网站: www.fitpower.cn