
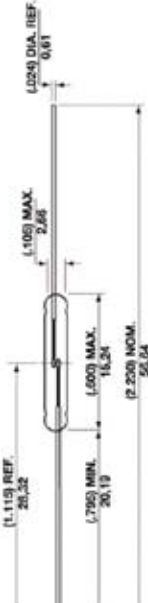
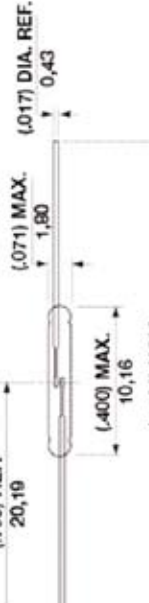
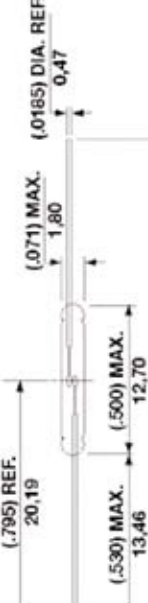
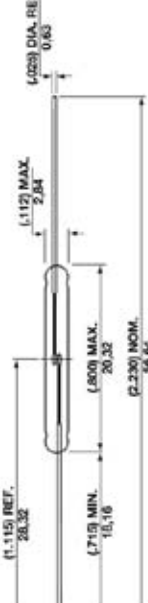
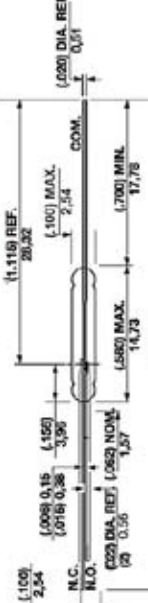


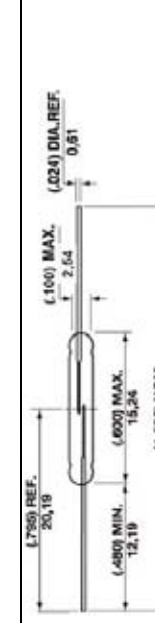
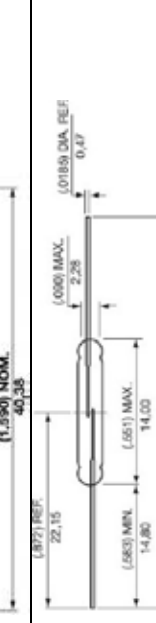
* SINCE 1976 *

HCH Reed Switches

<h3>Specifications</h3>  <p>See following pages for technical quality control support (or reliability data).</p>											
		HCH25	HCH211	HCH219	HCH229	HCH551					
触点形式		A		A		A		A		A	
性能											
触点负载		20	10	10	50	5					
电压	最大切换电压	200	200	200	265Vac rms (250Vdc)	175					
	最小切换电压	250	250	250	750	200					
电流	最大切换电流	1.0	0.5	0.5	1.0	0.25					
	最小切换电流	1.2	1.0	0.8	2.5	1.5					
电阻	最大切换电阻	0.100	0.120	0.100	0.100	0.100					
	最小切换电阻	10	10	10	10	10					
电容		0.4	0.2	0.3	0.2	1.0					
温度	工作 °C	-40 to +125	-40 to +125	-40 to +125	-20 to +125	-40 to +125					
	储存 °C	-65 to +125	-65 to +125	-65 to +125	-65 to +125	-65 to +125					
动作参数											
吸合时间	ms-max.	0.7	0.5	0.6	0.75	0.7					
回跳时间	ms-max.	0.2	0.1	0.2	0.3	1.0					
抗冲击	G-max.	100	100	100	100	50					
振动	G-max.	30	30	30	30	30					
共振频率	Hz-typ.	6250	8500	9500	2100	11000					
磁性参数											
吸合值	Ampere Turns	17-38	10-25	10-25	22-43	15-30					
		Miniature CD	Sub-Miniature	Sub-Miniature	Miniature HV	Miniature Changeover					

* SINCE 1976 *

HCH Reed Switches

Specifications		HCH2210		HCH2210V		HCH2212		HCH9215		HCH9216		HCH50WD	
		A		A		A		A		A		A	
 <p>See following pages for technical quality control support (or reliability data).</p>													
触点形式		A		A		A		A		A		A	
性能													
触点负载		50		10		20		10		10		50	
电压		最大切换电压		200		200		200		200		200	
		最小切换电压		300		2000		250		250		250	
电流		最大切换电流		1.5		0.5		1.0		0.5		1.0, 0.7	
		最小切换电流		3.0		1.3		1.0		1.2		3.0, 2.1	
电阻		最大切换电阻		0.100		0.100		0.100		0.100		0.10	
		最小切换电阻		10 ¹⁰		10 ¹²		10 ¹²		10 ¹⁰		10 ¹⁰	
电容		0.2		0.2		0.4		0.2		0.2		0.2	
温度		工作 °C		-40 to +125		-75 to +125		-40 to +125		-40 to +125		-40 to +125	
		储存 °C		-65 to +125		-75 to +125		-65 to +125		-65 to +125		-65 to +125	
动作参数													
吸合时间		ms-max.		0.75		0.75		0.6		0.6		0.55	
回跳时间		ms-max.		0.3		0.3		0.2		0.2		0.2	
抗冲击		G-max.		100		100		100		100		100	
振动		G-max.		30		30		30		30		30	
共振频率		Hz-typ.		2100		3200		6250		3900		5200	
磁性参数													
吸合值		Ampere Tums		22-43		17-38		17-38		12-38		10-30	
		Miniature Power		Miniature HV		Sub-Miniature		Sub-Miniature		Sub-Miniature			

申明：

本产品规格书仅供客户使用时参考，若有更改，恕不另行通知。

客户需根据具体的使用条件而选择适用的产品。若有问题，请与汉格电子联系以获得更多技术支持，但产品选型责任仅由客户负责。