





10-30V直流三线

		F17		F18	
安装方式		齐平	非齐平	齐平	非齐平
检测距离		5mm	8mm	5mm	8mm
输出方式	NPN NO				
	NPN NC				
输出方式	PNP NO				
	PNP NC				

技术参数

电压	10...30 VDC	10...30 VDC	10...30 VDC	10...30 VDC
偏移	<±10% Sr	<±10% Sr	<±10% Sr	<±10% Sr
负载	<100mA	<100mA	<100mA	<100mA
压降	<2.5V	<2.5V	<2.5V	<2.5V
电流	<10mA	<10mA	<10mA	<10mA
回差	1...20%	1...20%	1...20%	1...20%
精度	<3%	<3%	<3%	<3%
频率	700Hz	500Hz	700Hz	500Hz
指示	黄色 LED	黄色 LED	黄色 LED	黄色 LED
极性	yes	yes	yes	yes
浪涌	yes	yes	yes	yes
短路	yes	yes	yes	yes
温度	-25...+70°C	-25...+70°C	-25...+70°C	-25...+70°C
湿度	35...95%	35...95%	35...95%	35...95%
等级	IP67	IP67	IP67	IP67
外壳	PBT	PBT	PBT	PBT
出线	2m PVC 电缆	2m PVC 电缆	2m PVC 电缆	2m PVC 电缆

* 电缆线材料及长度可按客户要求定制

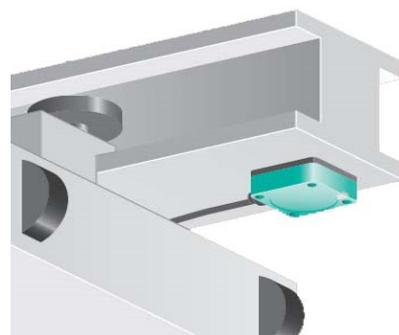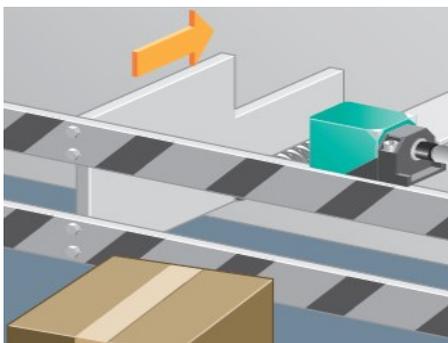





10-30VDC直流两线

		F17		F18	
安装方式		齐平	非齐平	齐平	非齐平
检测距离		5mm	8mm	5mm	8mm
输出方式	DC 2线 NO				
	DC 2线 NC				

技术参数

电压	10...30 VDC	10...30 VDC	10...30 VDC	10...30 VDC
偏移	<±10% Sr	<±10% Sr	<±10% Sr	<±10% Sr
负载	<100mA	<100mA	<100mA	<100mA
压降	<8V	<8V	<8V	<8V
电流	<1mA	<1mA	<1mA	<1mA
回差	1...20%	1...20%	1...20%	1...20%
精度	<3%	<3%	<3%	<3%
频率	500Hz	300Hz	500Hz	300Hz
指示	黄色 LED	黄色 LED	黄色 LED	黄色 LED
极性	yes	yes	yes	yes
浪涌	yes	yes	yes	yes
短路
温度	-25...+70°C	-25...+70°C	-25...+70°C	-25...+70°C
湿度	35...95%	35...95%	35...95%	35...95%
等级	IP67	IP67	IP67	IP67
外壳	PBT	PBT	PBT	PBT
出线	2m PVC 电缆	2m PVC 电缆	2m PVC 电缆	2m PVC 电缆

* 电缆线材料及长度
可按客户要求定制

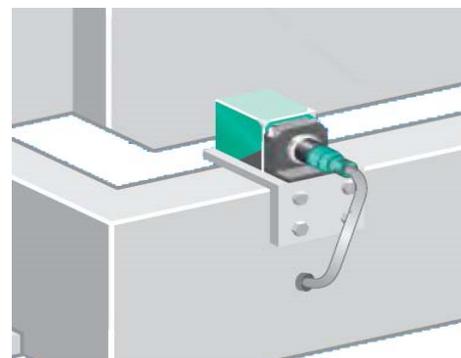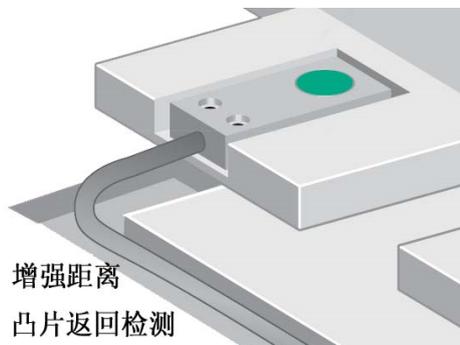

交流两线

		F17		F18	
安装方式		齐平	非齐平	齐平	非齐平
检测距离		5mm	8mm	5mm	8mm
输出方式	AC 2线 NO				
	AC 2线 NC				

技术参数

电压	90...250 VAC	90...250 VAC	90...250 VAC	90...250 VAC
偏移	<±10% Sr	<±10% Sr	<±10% Sr	<±10% Sr
负载	<200mA	<200mA	<200mA	<200mA
压降	<10V	<10V	<10V	<10V
电流	<3mA	<3mA	<3mA	<3mA
回差	1...20%	1...20%	1...20%	1...20%
精度	<3%	<3%	<3%	<3%
频率	20Hz	20Hz	20Hz	20Hz
指示	黄色 LED	黄色 LED	黄色 LED	黄色 LED
极性
浪涌	yes	yes	yes	yes
短路
温度	-25...+70°C	-25...+70°C	-25...+70°C	-25...+70°C
湿度	35...95%	35...95%	35...95%	35...95%
等级	IP67	IP67	IP67	IP67
外壳	PBT	PBT	PBT	PBT
出线	2m PVC 电缆	2m PVC 电缆	2m PVC 电缆	2m PVC 电缆

* 电缆线材料及长度
可按客户要求定制

