

Electrical: 电力 :

5 A 12/24 VDC-125 VAC

3 A 250 VAC

Gold contacts may be required for less than 12VDC & 20 milliamp

金触点要求至少12vdc和20毫安

Switch Type: 开关类型

Snap Action 快动作

Protection: 保护

DIN 43650A-IP65, Terminals-IP00

Temperature Range: 温度范围

-20°F to 180°F (-29°C to 82°C)

Mechanical Range: 机械范围

1,000,000 Cycles

Diaphragm Material: 隔膜材料

Nitrile (Optional Viton® & EPDM)

Housing Material: 外壳材料

Brass 铜

Maximum Overpressure: 最大超压


350 PSI (25 BAR)

Repeatability: 可重复性

+/- 2% of full set point range

Weight: 重量

0.26 lbs. (0.12 Kg.) max

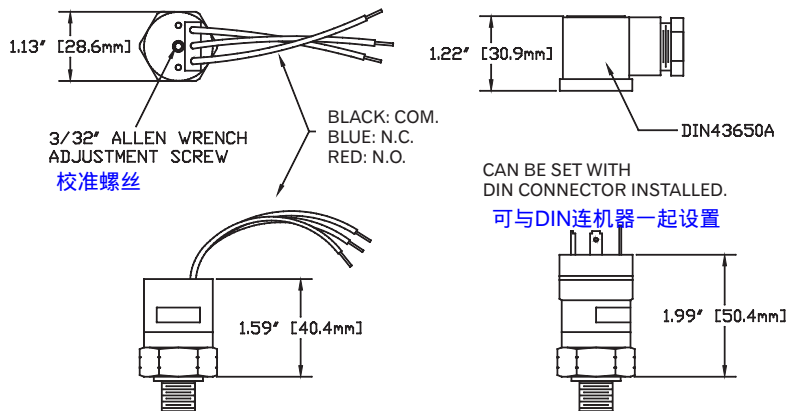

Model	Adjustment Range		Average Differential	
	PSI	Bar	PSI	Bar
1	3-7	0.21-0.48	0.5-1.2	0.03-0.08
2	5-30	0.32-2.07	1-2.5	0.07-0.17
3	25-150	1.72-10.3	2-10	0.14-0.69

Ordering Information:

SPA-	2-	4 M-	C-	H-	1
SPA - Field Adjustable	See Adjustment Range above or state factory set point	2M - 1/8"NPT 4M - 1/4"NPT 4G - 1/4"BSPP	A - SPST/NO B - SPST/NC C - SPDT	FL - Flying leads, 18" HC - DIN Cable Clamp HC - 5A DIN Light 12 VDC HC - 5B DIN Light 24 VDC HC - 5C DIN Light 110/230 VAC HN - DIN 1/2" Conduit (Female) H - DIN43650A male half only SP - 1/4" Spades	Blank (standard) 1. Viton 2. EPDM 3. SS Housing 7. Gold Contact 8. 10A Micro switch* SR - Snubber
SPF - Factory set		4S - 7/16"-20SAE 4SLN - "+ Swivel 6S - 9/16"-18SAE			

Note: For other port thread sizes, electrical terminations and ranges, see page 20.

*Only available in SPA/F-2 and SPA/F-3