


Vinyl masking tape

V-250

Constitution

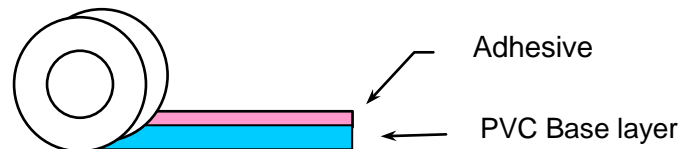

Test method

According to JIS Z 0237 : 2000

Feature

- It is easy to do work for light unwinding force.
- The flattery nature to a curved surface is good.

Standard size

Thickness (mm)	Width (mm)	Length (m)	Color
0.120	19・30	50	white

※ Except for other standards, please consult with us.

Doc No. MAS-027-E-2 2013/09/20 1/2

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

Characteristic

Item		Unit	V-250
Thickness		mm	0.120
Adhesion strength	to steel	N/19mm (gf/19mm)	7.59 774
Unwinding force	high speed (30m/min)	N/19mm (gf/19mm)	4.18 427
Elongation		%	227
Tensile strength		N/19mm (kgf/19mm)	67.6 6.90

Precautions


- Wipe oil, moisture, and dust off the surface of adherends thoroughly before application.
- The adhesive is pressure-sensitive. Handle it with utmost care.
- Most recommended temperature for adhesion is above 10°C. (If the temperature is below 10°C(like in winter), their initial adhesive strength will be low.)
- Keep the products away from high temperatures and humidity, and store them in a dark cool place avoiding direct sunlight.

Doc No. MAS-027-E-2 2013/09/20 2/2

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

Vinyl masking tape
V-250W

Constitution

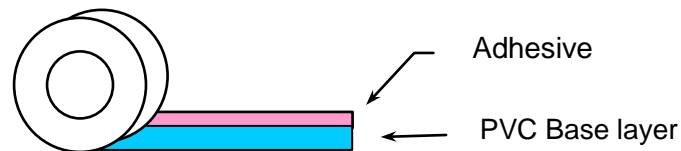

Test method

According to JIS Z 0237 : 2000

Feature

- It is easy to do work for light unwinding force.
- This tape is designed to give an excellent paint line.

Standard size

Thickness (mm)	Width (mm)	Length (m)	Color
0.130	19•20•25•30	50	white•yellow

※ Except for other standards, please consult with us.

Doc No. MAS-028-E-2 2013/09/20 1/2

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

Characteristic

Item		Unit	V-250W
Thickness		mm	0.130
Adhesion strength	to steel	N/19mm (gf/19mm)	4.52 461
Unwinding force	high speed (30m/min)	N/19mm (gf/19mm)	5.95 607
Elongation		%	242
Tensile strength		N/19mm (kgf/19mm)	67.0 6.84

Precautions

- Wipe oil, moisture, and dust off the surface of adherends thoroughly before application.
- The adhesive is pressure-sensitive. Handle it with utmost care.
- Most recommended temperature for adhesion is above 10°C. (If the temperature is below 10°C (like in winter), their initial adhesive strength will be low.)
- Keep the products away from high temperatures and humidity, and store them in a dark cool place avoiding direct sunlight.

Doc No. MAS-028-E-2 2013/09/20 2/2

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.