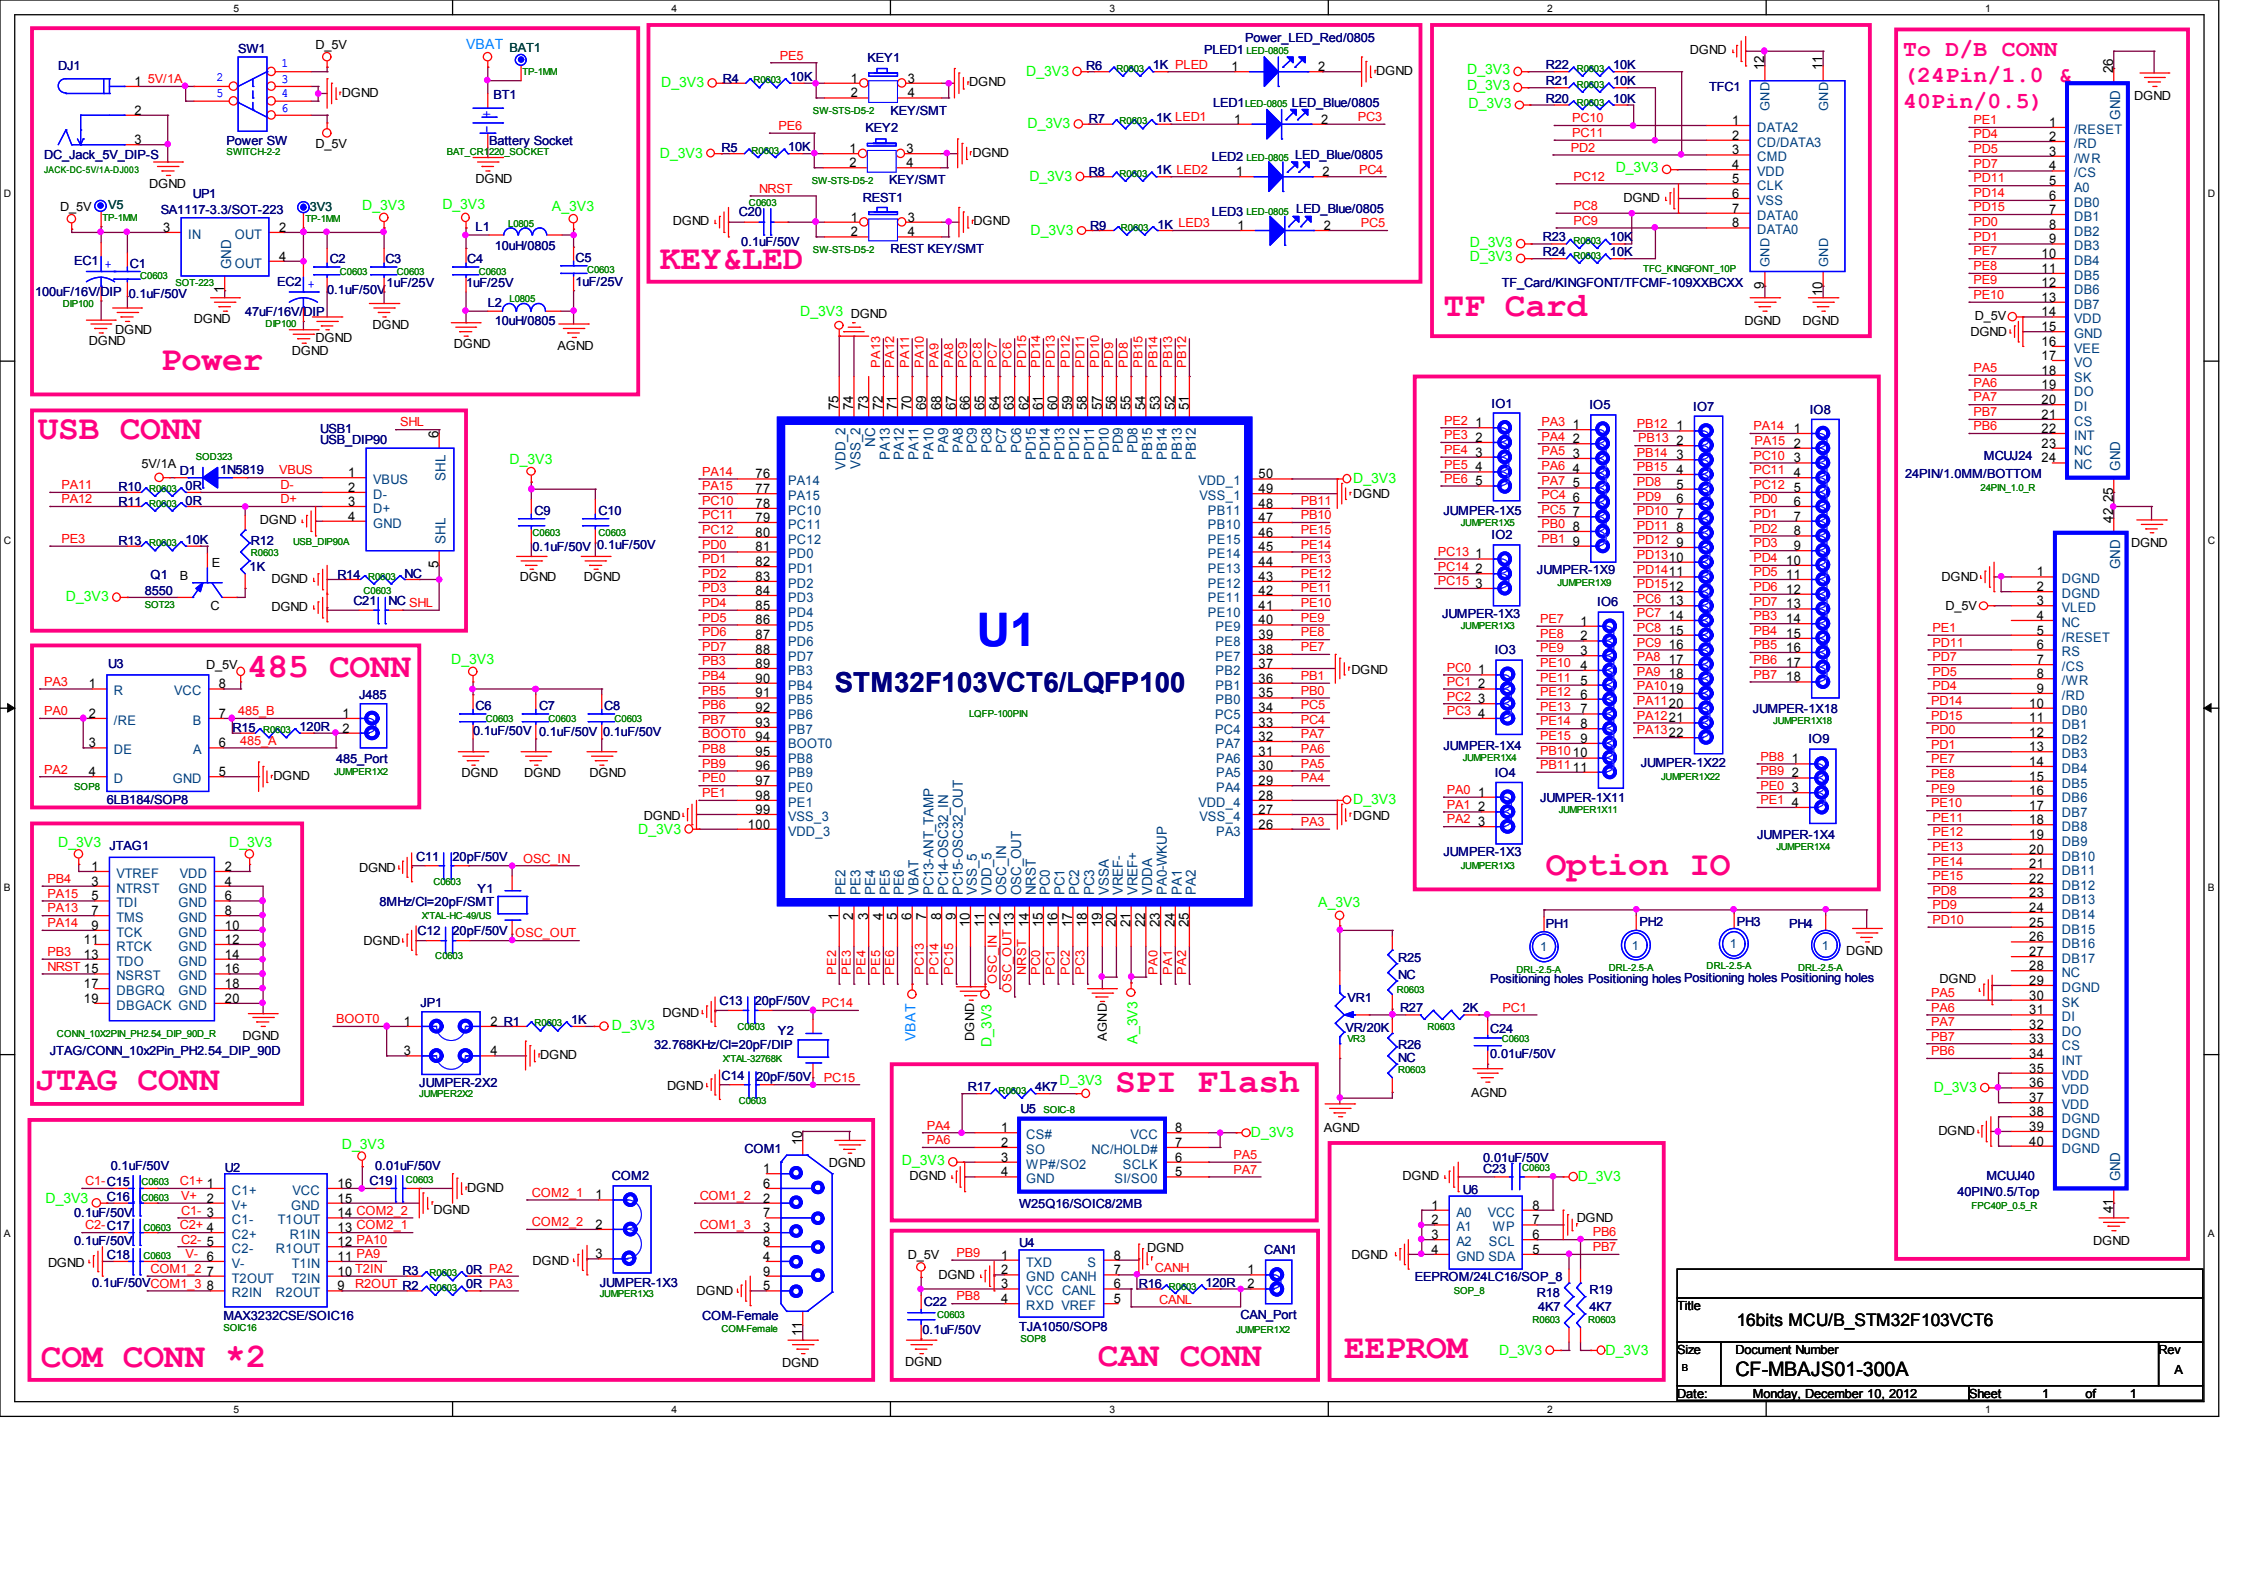
Power
USB CONN
485 CONN
JTAG CONN
U1
STM32F103VCT6/LQFP100
LQFP-100PIN
KEY&LED
TF Card
Option IO
SPI Flash
COM CONN *2
CAN CONN
EEPROM
To D/B CONN
(24Pin/1.0 &
40Pin/0.5)
Power_LED_Red/0805
LED1_Blue/0805
LED2_Blue/0805
LED3_Blue/0805
KEY1
KEY2
REST1
SW-STS-D5-2
KEY/SMT
REST KEY/SMT
DC_Jack_5V_DIP-S
JACK-DC-5V/1A-DJ003
Power SW
SWITCH-2-2
Battery Socket
BAT_CR1220_SOCKET
SA1117-3.3/SOT-223
USB_DIP90
USB_DIP90A
6LB184/SOP8
485_Port
JUMPER1X2
JTAG/CONN_10x2Pin_PH2.54_DIP_90D
JUMPER-2X2
8MHz/CI=20pF/SMT
XTAL-HC-49/US
32.768KHz/CI=20pF/DIP
XTAL-32768K
W25Q16/SOIC8/2MB
MAX3232CSE/SOIC16
COM-Female
TJA1050/SOP8
CAN_Port
TF_Card/KINGFONT/TFCMF-109XXBCXX
TFC_KINGFONT_10P
JUMPER-1X5
JUMPER-1X9
JUMPER-1X3
JUMPER-1X4
JUMPER-1X11
JUMPER-1X18
JUMPER-1X22
EEPROM/24LC16/SOP_8
SOP_8
MCUJ24
24PIN/1.0MM/BOTTOM
24PIN_1.0_R
MCUJ40
40PIN/0.5/Top
FPC40P_0.5_R
Positioning holes
DRL-2.5-A
Title
16bits MCU/B_STM32F103VCT6
Size
B
Document Number
CF-MBAJS01-300A
Rev
A
Date:
Monday, December 10, 2012
Sheet
1
of
1