
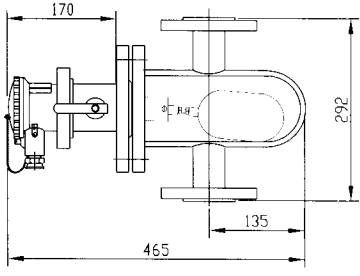
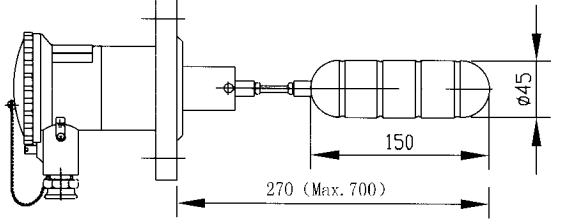
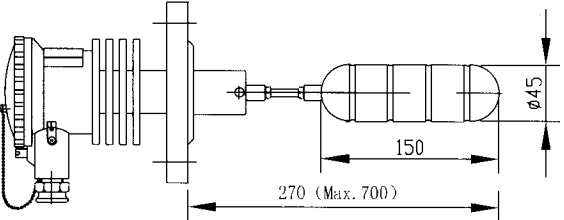


UQK-40型、UQKS-40型 安装形式installation mode: 外侧水平安装式 horizontal outer side mounting 控制范围controlling range: 10mm, 不可调not adjustable 工作温度operating temperature: -40~150℃ 工作压力operating pressure: 4.0, 6.3MPa 介质密度medium specific gravity: $\geq 0.40\text{g/cm}^3$ 触点容量contact capacity: AC250, 7A 接液材质contacting material: 不锈钢stainless steel 过程连接process connection: DN40 PN4.0/6.3	UQK-40 (标准) 型 standard type 	UQKS-40 (带自检) 型 with self-checking 
中温型液位开关middle temperature type 安装形式installation mode: 侧装式、顶装式side-mounting、top-mounting 工作温度operating temperature: $\leq 250^\circ\text{C}$ 工作压力operating pressure: 1.0, 4.0, 6.3MPa 介质密度medium specific gravity: $\geq 0.40\text{g/cm}^3$ 触点容量contact capacity: AC250, 7A 接液材质contacting material: 不锈钢stainless steel 过程连接process connection: DN50或DN80 PN1.0/4.0		
高温型液位开关high temperature type 安装形式installation mode: 侧装式、顶装式side-mounting、top-mounting 工作温度operating temperature: $\leq 350^\circ\text{C}$ 工作压力operating pressure: 1.0, 4.0, 6.3MPa 介质密度medium specific gravity: $\geq 0.40\text{g/cm}^3$ 触点容量contact capacity: AC250, 7A 接液材质contacting material: 不锈钢stainless steel 过程连接process connection: DN50或DN80 PN1.0/4.0		
非标小法兰液位开关not-standard small flange 安装形式installation mode: 侧装式、顶装式side-mounting、top-mounting 工作温度operating temperature: -40~150℃ 工作压力operating pressure: 1.0, 4.0, 6.3MPa 介质密度medium specific gravity: $\geq 0.40\text{g/cm}^3$ 触点容量contact capacity: AC250, 7A 接液材质contacting material: 不锈钢stainless steel或 PP、PTFE 过程连接process connection: 非标准not-standard flange	