



UQK-60系列 型号规格 MODEL AND SPEC

UQK-60	浮球(浮筒)液位控制器 float(displacer) liquid level controller		
UQKS-60	手动自检浮球(浮筒)液位控制器 manual self-checking float(displacer) liquid level controller		
	1	螺纹连接G1"(内螺纹) inner thread	安装方式 mounting mode
	2	侧底法兰 DN25 side-bottom flange	
	3	侧侧法兰 I DN25 side-side flange	
	4	卧式, 螺纹连接G1"(内螺纹) horizontal, inner thread connecting	
	5	侧侧法兰 II DN25 side-side flange	
	6	顶装式 DN100 top-mounted	
	1	上限或下限 upper limit or lower limit	报警形式 alarm form
	2	上下限 upper and lower limit	
	Q	浮球 float	测量元件 measuring element
	T	浮筒 displacer	
	C	重锤 weight	
	-□	介质密度, 测界位时填, 单位 g/cm ³ medium specific gravity for interface controller	
	-	3 4.0MPa	工作压力 operating pressure
		4 6.3MPa	
		5 10.0MPa	
	X	其它压力等级 other	
	A	标准型 standard: -40~200 °C	工作温度 operating temperature
	B	高温型 high temperature: 200~400 °C	
	0	普通防水型 ordinary water-proof type	选项 options
	D	隔爆型 explosion-proof type d II BT4	
	E	本安型 intrinsically safe type ib II CT5	
	J	蒸汽夹套, 接头G1/2"外螺纹 with heating jacket	
	-□	测量范围, 单位 mm (顶装式填) measuring range for top-mounted type	





外形尺寸 DIMENSIONS

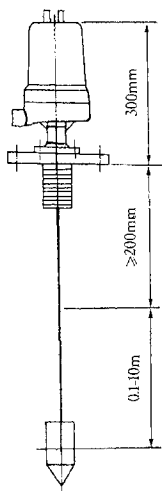

UQK-66□C型

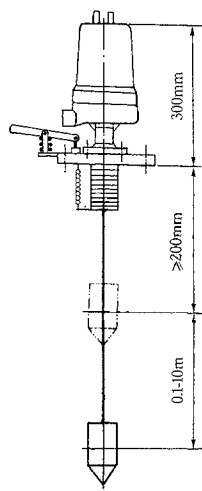

UQK-66□T型

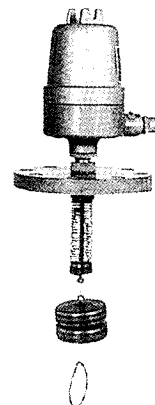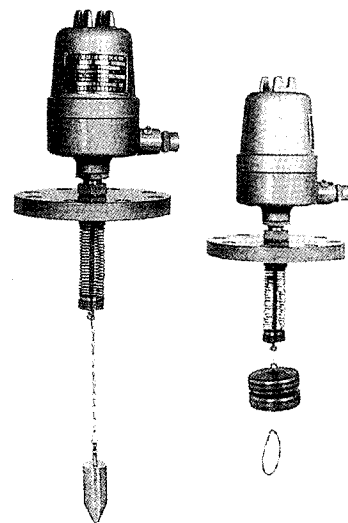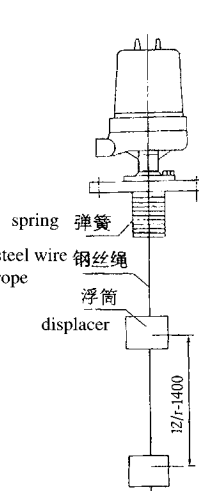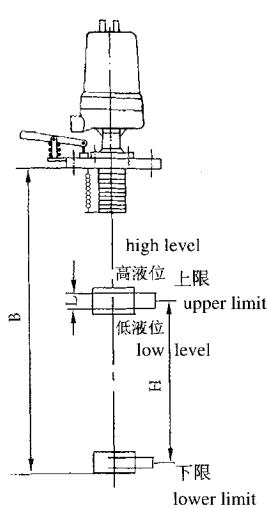

控制点 control point	最小密度 (g/cm ³) min. specific gravity	B (mm)	L (mm)	H (mm)
上或下限 upper or lower limit	0.4	340~1540	12/r ~ 1400	-
上下限 upper and lower limit	0.45		12/r	70 ~ 1270