



沪制02240183



UHZ-517C13/C13A 低温型磁翻柱液位计

UHZ-517C13/C13A LOW TEMPERATURE MAGNETIC LIQUID LEVEL GAUGE

适用范围 SUITABLE RANGE

UHZ-517C13/C13A低温型磁翻柱液位计适用于低温场合的液位测量，最低工作温度为-196℃，最大工作压力为4.0MPa。

UHZ-517C13/C13A low temperature magnetic reversing column liquid level gauge is suitable for liquid level measurement in low temperature situation. Its lowest operating temperature is -196℃, and its maximum operating pressure is 4.0MPa

技术参数 SPECIFICATION

测量范围 measuring range:

两个法兰中心之间的距离center-center distance

最小min.300mm至最大max.8000mm

工作压力 operating pressure: 4.0MPa

工作温度 operating temperature: C13型: -40~100℃

C13A型: -196~100℃

介质密度 medium density: 0.38~1.2g/cm³

过程连接 process connecting:

旁路侧面安装法兰side mounting flange:

DN25 PN4.0,

法兰标准flange standard: HG20592~20635-97其它


法兰标准请用户注明Other standard on request.

材质 material:

旁路管 bypass tube: 00Cr17Ni14M2(316L)

浮子 float: 钛titanium

可选项 optional item:

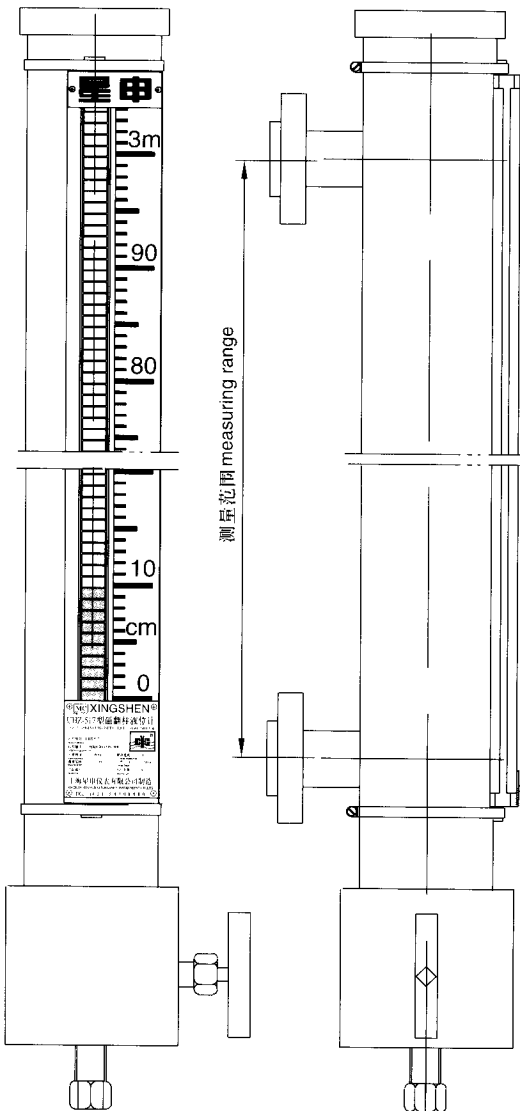

UHZ-517C13(A)	
<input type="checkbox"/> L	排污阀 with drain valve
<input type="checkbox"/>	液位开关 with level switch, G、M、N、S、T 任选项option
<input type="checkbox"/> R	4~20mA 二线制变送器 with two-wire transmitter
<input type="checkbox"/> D	防爆型 explosion proof type: dIIBT4
<input type="checkbox"/> E	本安型 intrinsically safe type: ibIICT4
<input type="checkbox"/> F	配隔离安全栅 matched with isolating barrier
<input type="checkbox"/> A	XGTH-510(竖式)显示调节报警仪 with display and regulating instrument(upright)
<input type="checkbox"/> B	XGTA-810(横式)显示调节报警仪 with display and regulating instrument(horizontal)
<input type="checkbox"/>	测量范围 measruing range(mm)
<input type="checkbox"/>	介质密度 specific gravity of medium(g/cm ³)
<input type="checkbox"/>	工作压力 operating pressure (MPa)