

UHZ-517C11 型磁翻柱液位计

UHZ-517C11 MAGNETIC LIQUID LEVEL GAUGE

适用范围 SUITABLE RANGE

UHZ-517C11 型磁翻柱液位计适用于高温低压场合的液位测量，最高工作温度为420℃，最大工作压力为2.5 MPa。

UHZ-517C11 magnetic reversing column liquid level gauge is suitable for liquid level measurement in low pressure and high temperature situation. Its highest operating temperature is 420℃, and maximum operating pressure is 2.5MPa.

技术参数 SPECIFICATION

测量范围 measuring range :

两个法兰中心之间的距离 center-center distance
最小 min. 150mm 至最大 max. 8000mm

工作压力 operating pressure : 2.5MPa

工作温度 operating temperature : ≤420℃

介质密度 medium density : 0.5~2.0g/cm³

过程连接 process connecting :

旁路侧面安装法兰 side mounting flange ;
DN25, PN2.5 凸面,

法兰标准 flange standard : HG20592~20635-97 其它
法兰标准请用户注明 Other standard on request.


材质 material :

旁路管 bypass tube : 00Cr17Ni14M2 ; 316L

浮子 float : 钛 titanium

翻柱 reversing column : 陶瓷 ceramic

可选项 optional item :

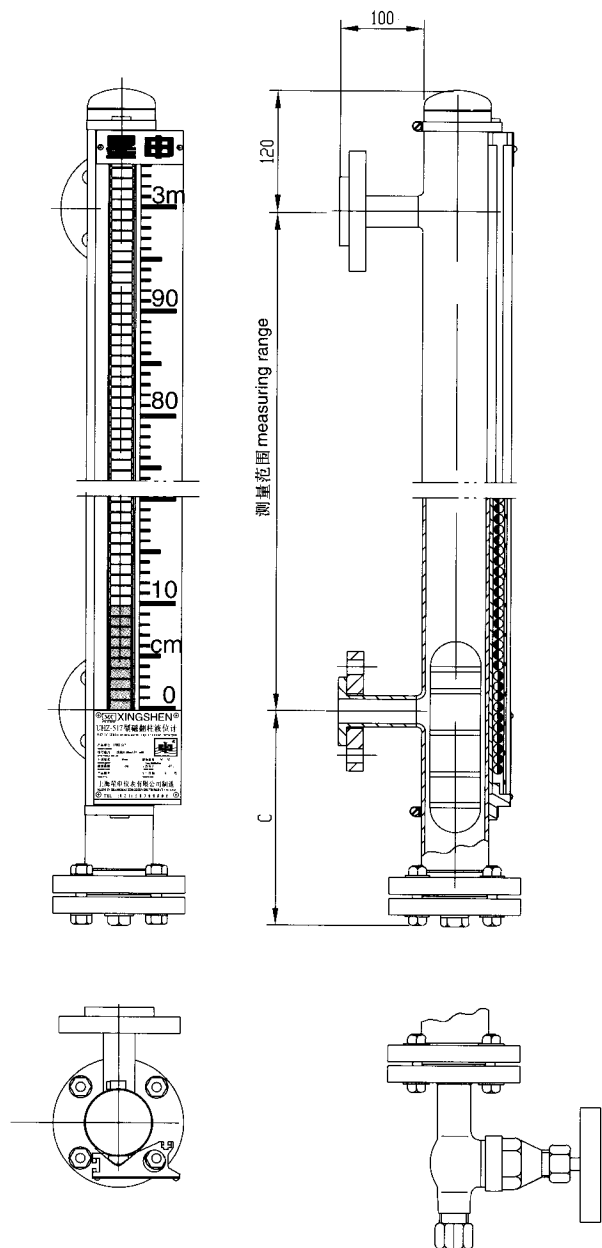

UHZ-517C11	
<input type="checkbox"/> L	排污阀 with drain valve
<input type="checkbox"/>	液位开关 with level switch G、M、N、S、T 任选 option
<input type="checkbox"/> R	4~20mA 二线制变送器 with two-wire transmitter
<input type="checkbox"/> D	隔爆型 explosion proof type: dIIBT4
<input type="checkbox"/> E	本安型 intrinsically safe type: ibIICT4
<input type="checkbox"/> F	配隔离安全栅 matched with isolating barrier
<input type="checkbox"/> A	XGTH-510(竖式) 显示调节报警仪 with display and regulating instrument(upright)
<input type="checkbox"/> B	XGTA-810(横式) 显示调节报警仪 with display and regulating instrument(horizontal)
<input type="checkbox"/> J3	真空夹套 with vacuum jacket
<input type="checkbox"/>	测量范围 measuring range(mm)
<input type="checkbox"/>	介质密度 specific gravity of medium(g/cm ³)
<input type="checkbox"/>	工作压力 operating pressure (MPa)