
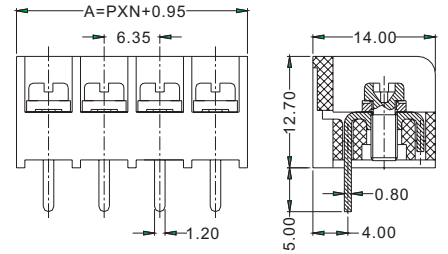


(Barrier terminal block) 功率型接线端子



BRTB635-00- □□

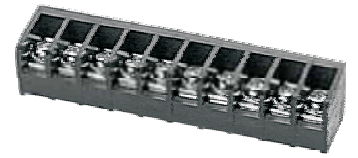

P=间距 N=Pin数

技术参数(Technical Data)	BRTB635-00
间距 (Center Space)	6.35 mm
压线范围 (Wire Range)	22 ~ 16AWG
螺钉扭矩 (Screw Torque)	5 Lbf-in
额定参数 (Electrical Parameters)	300V, 15A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M3, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	1.8mm


BRTB635-01- □□

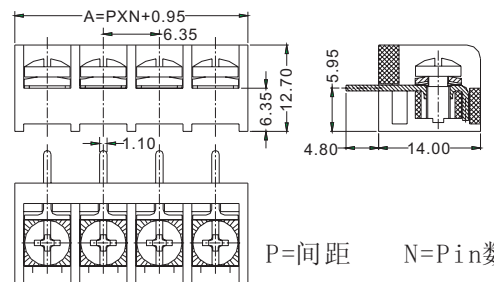

P=间距 N=Pin数

技术参数(Technical Data)	BRTB635-01
间距 (Center Space)	6.35 mm
压线范围 (Wire Range)	22 ~ 16AWG
螺钉扭矩 (Screw Torque)	5 Lbf-in
额定参数 (Electrical Parameters)	300V, 15A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M3, Steel Ni plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	1.8mm

BRTB850-00- □□

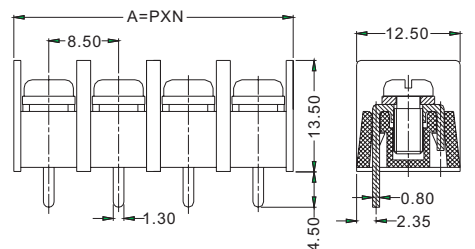

P=间距 N=Pin数

技术参数(Technical Data)	BRTB850-00
间距 (Center Space)	8.50 mm
压线范围 (Wire Range)	22 ~ 14AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数 (Electrical Parameters)	300V, 20A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M3.5, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	1.8mm


功率型接线端子 (Barrier terminal block)

技术参数(Technical Data)

BRTB762-00

间距 (Center Space)	7.62 mm
压线范围 (Wire Range)	22 ~ 14AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数 (Electrical Parameters)	300V, 15A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M3, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	1.8mm

BRTB762-00- □□

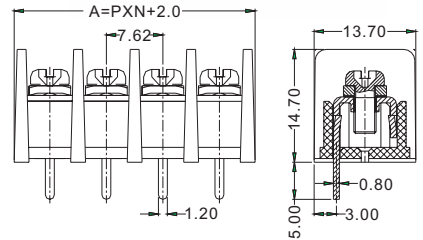


P=间距 N=Pin数

技术参数(Technical Data)

BRTB762-01

间距 (Center Space)	7.62 mm
压线范围 (Wire Range)	22 ~ 14AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数 (Electrical Parameters)	300V, 15A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M3, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	1.8mm

BRTB762-01- □□

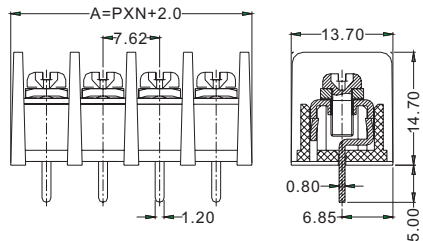


P=间距 N=Pin数

技术参数(Technical Data)

BRTB762-02

间距 (Center Space)	7.62 mm
压线范围 (Wire Range)	22 ~ 14AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数 (Electrical Parameters)	300V, 20A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M3, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	1.8mm

BRTB762-02- □□

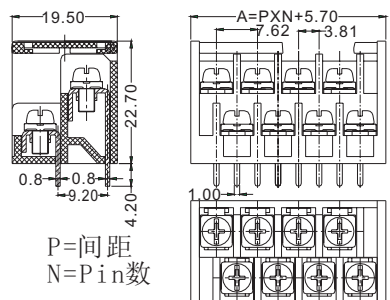


P=间距
N=Pin数

(Barrier terminal block) 功率型接线端子


BRTB762-02- □□-R1

技术参数(Technical Data)	BRTB762-02-R1
间距 (Center Space)	7.62 mm
压线范围 (Wire Range)	22 ~ 14AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数 (Electrical Parameters)	300V, 20A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M3, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40°C ~ +120°C
PCB孔径 (PCB Holes Diameter)	3.4X1.2 mm

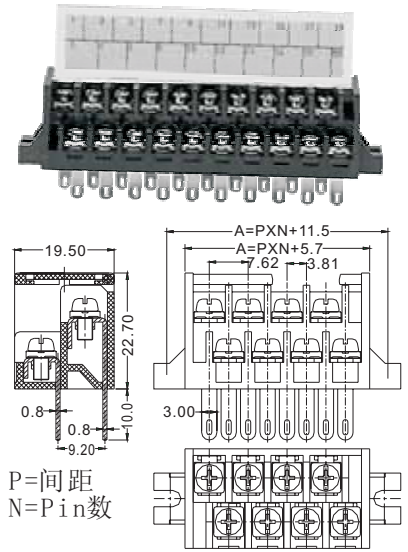


BRTB762-03- □□

技术参数(Technical Data)	BRTB762-03
间距 (Center Space)	7.62 mm
压线范围 (Wire Range)	22 ~ 14AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数 (Electrical Parameters)	300V, 20A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M3, Steel Ni plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40°C ~ +120°C
PCB孔径 (PCB Holes Diameter)	3.4X1.2 mm

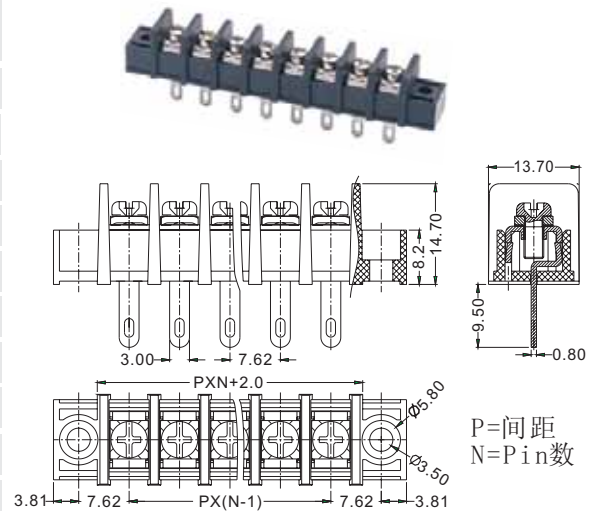

BRTB762-03- □□-R1

技术参数(Technical Data)	BRTB762-03-R1
间距 (Center Space)	7.62mm
压线范围 (Wire Range)	22 ~ 14AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数 (Electrical Parameters)	300V, 15A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M3, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40°C ~ +120°C
PCB孔径 (PCB Holes Diameter)	1.8mm

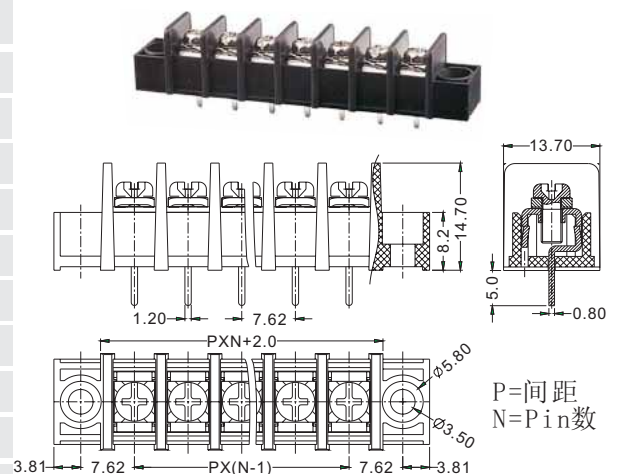


功率型接线端子 (Barrier terminal block)

技术参数(Technical Data)

BRTB762-03-R2

间距 (Center Space)	7.62 mm
压线范围 (Wire Range)	22 ~ 14AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数(Electrical Parameters)	300V, 15A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M3, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	1.8mm

BRTB762-03- □□-R2

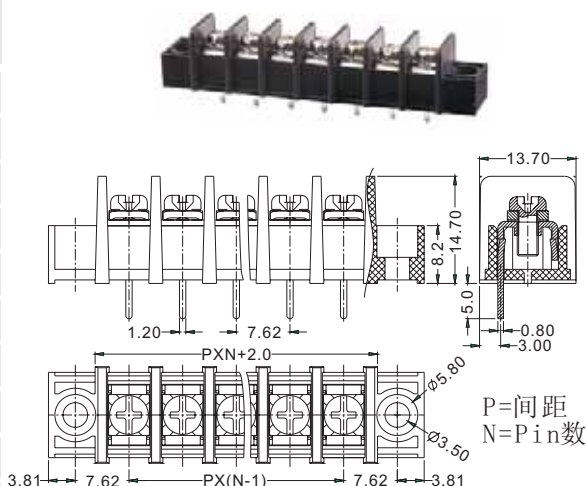


技术参数(Technical Data)

BRTB762-04

间距 (Center Space)	7.62 mm
压线范围 (Wire Range)	22 ~ 14AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数(Electrical Parameters)	300V, 15A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M3, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	1.8mm

BRTB762-04- □□

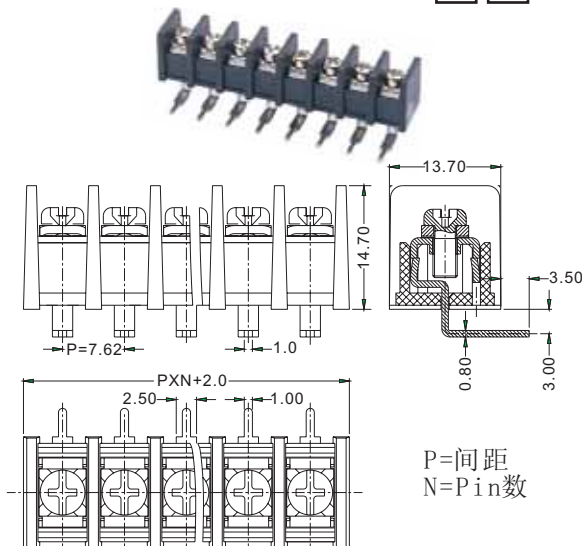


技术参数(Technical Data)

BRTB825-00

间距 (Center Space)	8.25 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数(Electrical Parameters)	300V, 20A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M3, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	1.8mm


BRTB825-00- □□

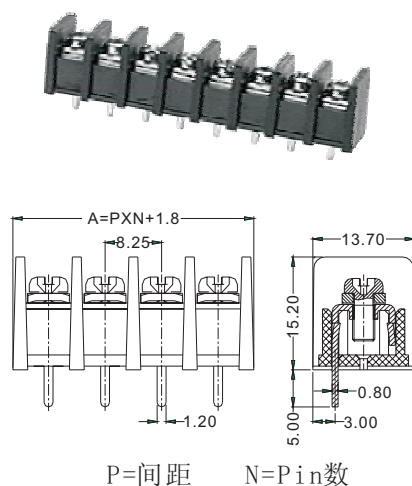

(Barrier terminal block) 功率型接线端子

BRTB825-01- □□



技术参数(Technical Data)	BRTB825-01
间距(Center Space)	8.25 mm
压线范围(Wire Range)	22 ~ 12AWG
螺钉扭矩(Screw Torque)	7 Lbf-in
额定参数(Electrical Parameters)	300V,20A
冲击电压(Rated Surge Voltage)	AC2000V—分钟
绝缘本体(Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M3, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	1.8mm

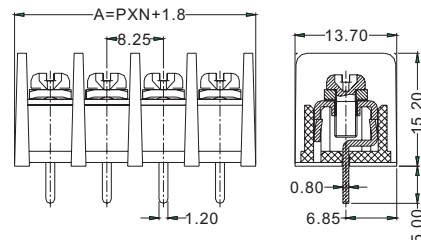

P=间距 N=Pin数

BRTB825-02- □□



技术参数(Technical Data)	BRTB825-02
间距(Center Space)	8.25 mm
压线范围(Wire Range)	22 ~ 12AWG
螺钉扭矩(Screw Torque)	7 Lbf-in
额定参数(Electrical Parameters)	300V,20A
冲击电压(Rated Surge Voltage)	AC2000V—分钟
绝缘本体(Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M3.5, Steel Ni plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	1.8mm

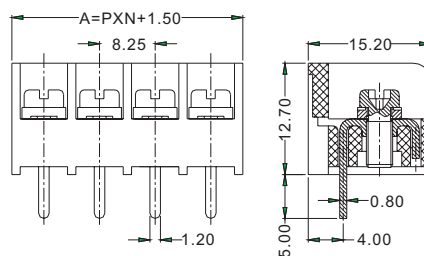

P=间距 N=Pin数

BRTB825-03- □□

技术参数(Technical Data)	BRTB825-03
间距(Center Space)	8.25 mm
压线范围(Wire Range)	22 ~ 12AWG
螺钉扭矩(Screw Torque)	7 Lbf-in
额定参数(Electrical Parameters)	300V,20A
冲击电压(Rated Surge Voltage)	AC2000V—分钟
绝缘本体(Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M3.5, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	1.8mm

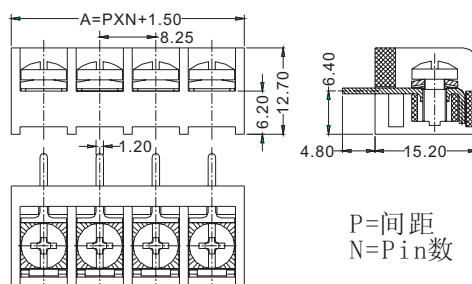


P=间距
N=Pin数

功率型接线端子 (Barrier terminal block)

技术参数(Technical Data)

BRTB825-04


间距 (Center Space)	8.25 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数(Electrical Parameters)	300V, 20A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M3, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	3.4X1.2 mm

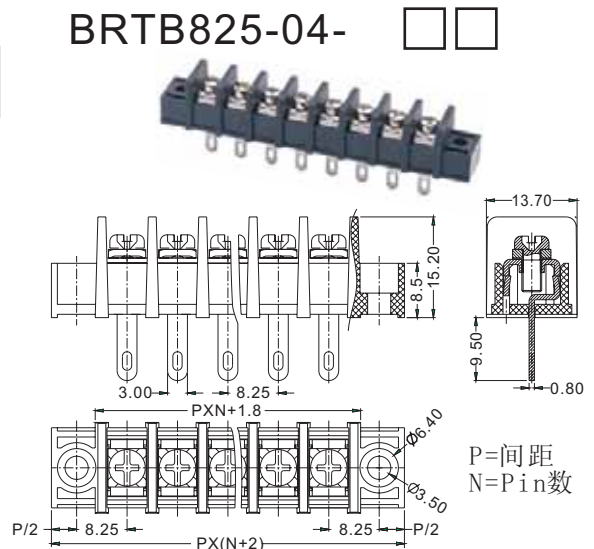

技术参数(Technical Data)

BRTB825-04-R1


间距 (Center Space)	8.25 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数(Electrical Parameters)	300V, 20A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M3, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	1.8mm

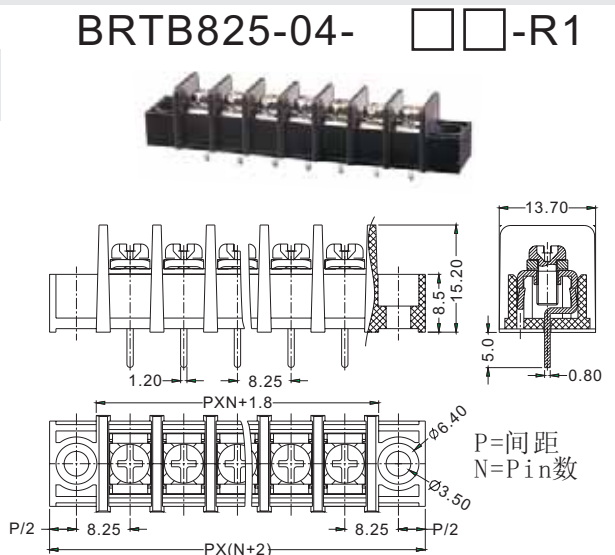

技术参数(Technical Data)


BRTB825-04-R2

间距 (Center Space)	8.25 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数(Electrical Parameters)	300V, 20A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M3, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	1.8mm

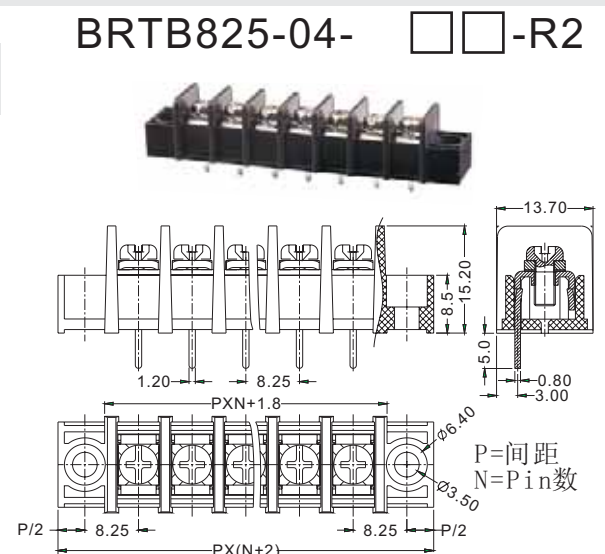

(Barrier terminal block) 功率型接线端子


BRTB825-05- □□

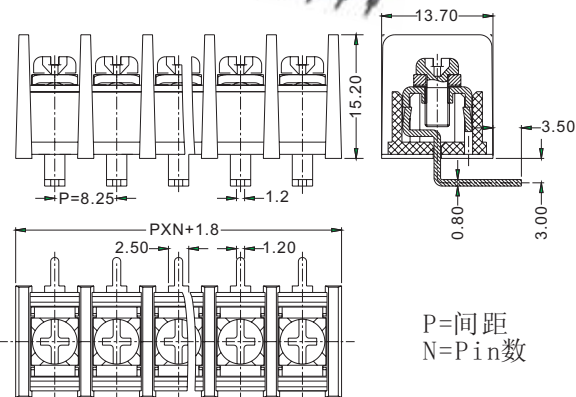

P=间距
N=Pin数

技术参数(Technical Data)	BRTB825-05
间距 (Center Space)	8.25 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数 (Electrical Parameters)	300V, 20A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M3, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	1.8mm


BRTB950-00- □□

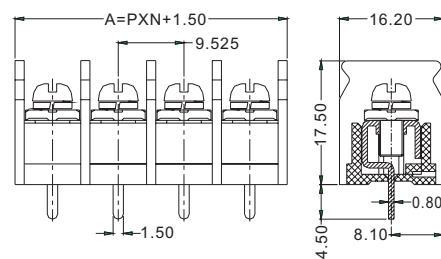

P=间距 N=Pin数

技术参数(Technical Data)	BRTB950-00
间距 (Center Space)	9.525 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	10 Lbf-in
额定参数 (Electrical Parameters)	300V, 25A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	2.0 mm

BRTB950-01- □□

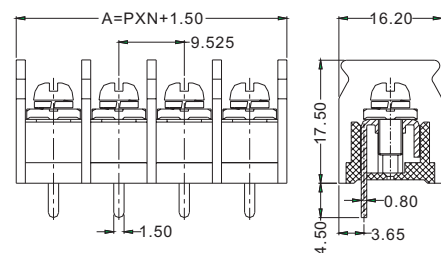



P=间距 N=Pin数

技术参数(Technical Data)	BRTB950-01
间距 (Center Space)	9.525 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	10 Lbf-in
额定参数 (Electrical Parameters)	300V, 25A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	2.0 mm

功率型接线端子 (Barrier terminal block)

BRTB950-02- □□



技术参数(Technical Data)	BRTB950-02
间距 (Center Space)	9.525 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	10 Lbf-in
额定参数(Electrical Parameters)	300V, 25A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M4, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	2.0 mm

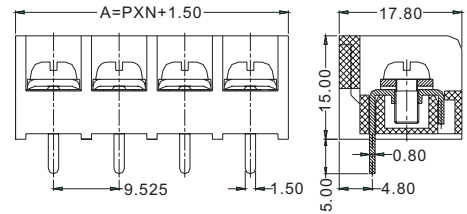

P=间距 N=Pin数

BRTB950-03- □□


技术参数(Technical Data)	BRTB950-03
间距 (Center Space)	9.525 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	10 Lbf-in
额定参数(Electrical Parameters)	300V, 25A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M4, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	2.0 mm

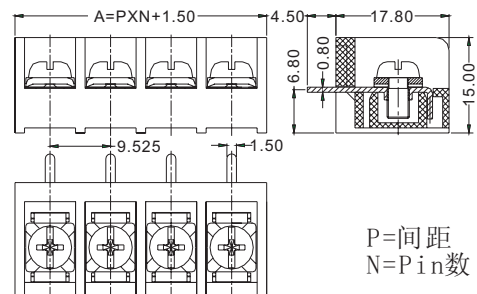

P=间距
N=Pin数

BRTB950-04- □□


技术参数(Technical Data)	BRTB950-04
间距 (Center Space)	9.525 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	10 Lbf-in
额定参数(Electrical Parameters)	300V, 30A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M4, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	4.0X1.2 mm

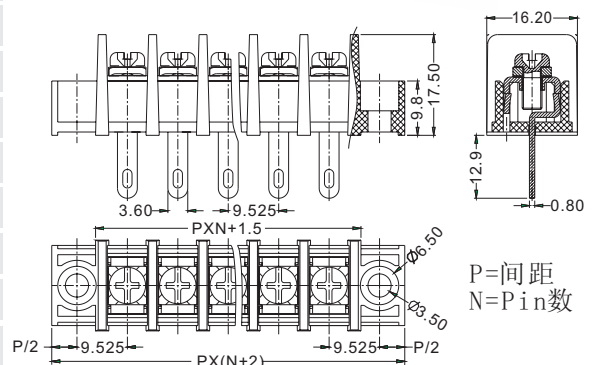

P=间距
N=Pin数

(Barrier terminal block) 功率型接线端子

BRTB950-04- □□-R1

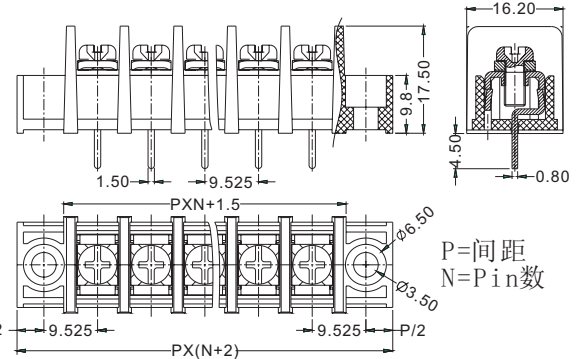


技术参数(Technical Data)

BRTB950-04-R1

间距 (Center Space)	9.525 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	10Lbf-in
额定参数 (Electrical Parameters)	300V, 25A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	1.8mm

BRTB950-04- □□-R2

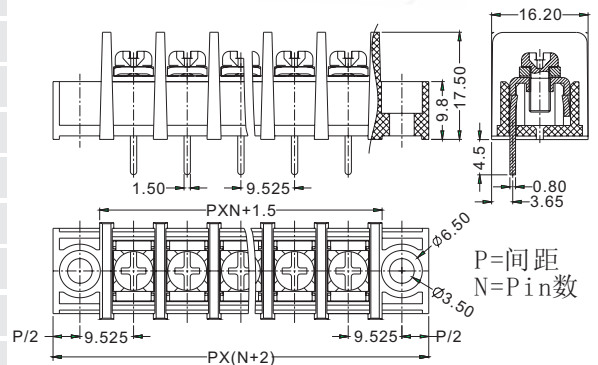


技术参数(Technical Data)

BRTB950-04-R2

间距 (Center Space)	9.525 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	10 Lbf-in
额定参数 (Electrical Parameters)	300V, 25A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	2.0 mm

BRTB950-05- □□

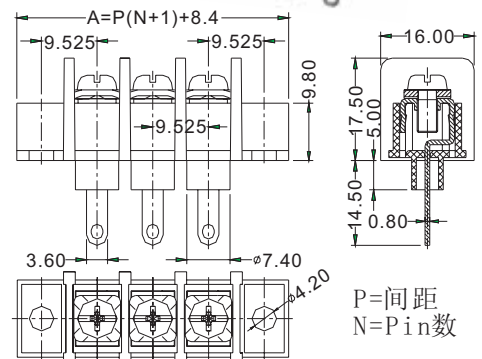

技术参数(Technical Data)

BRTB950-05

间距 (Center Space)	9.525 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	10 Lbf-in
额定参数 (Electrical Parameters)	300V, 30A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	2.0 mm


功率型接线端子 (Barrier terminal block)

技术参数(Technical Data)

BRTB950-06

间距 (Center Space)	9.525 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	10 Lbf-in
额定参数(Electrical Parameters)	300V, 25A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M4, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	2.0 mm

BRTB950-06- □□

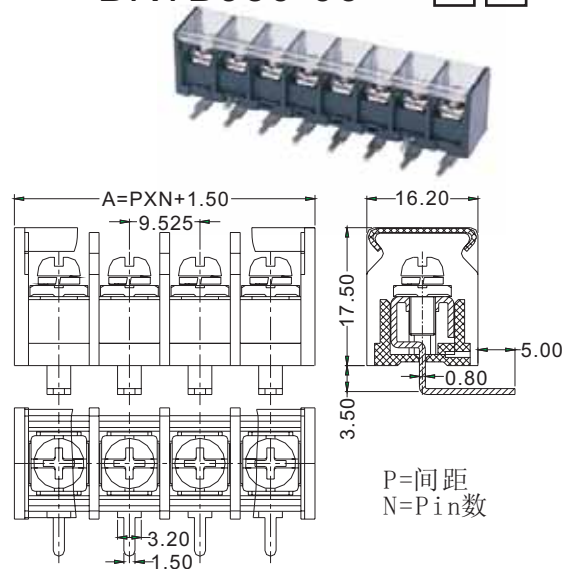


技术参数(Technical Data)

BRTB100-00

间距 (Center Space)	10.0 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	10 Lbf-in
额定参数(Electrical Parameters)	300V, 30A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M4, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	4.0X1.2 mm

BRTB100-00- □□

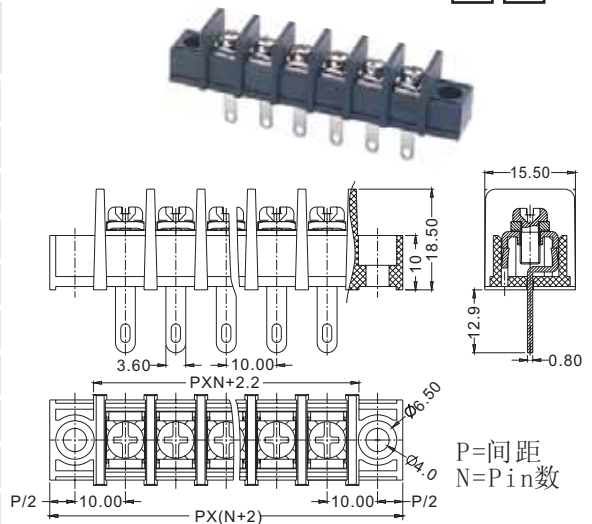


技术参数(Technical Data)

BRTB100-01

间距 (Center Space)	10.0 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	10 Lbf-in
额定参数(Electrical Parameters)	300V, 30A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M4, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	2.0mm


BRTB100-01- □□

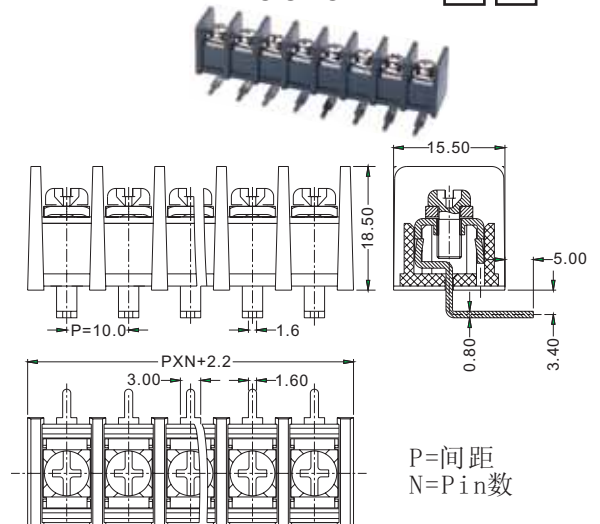

(Barrier terminal block) 功率型接线端子


BRTB100-02- □□

技术参数(Technical Data)	BRTB100-02
间距 (Center Space)	10.0 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数 (Electrical Parameters)	300V, 25A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	1.8mm

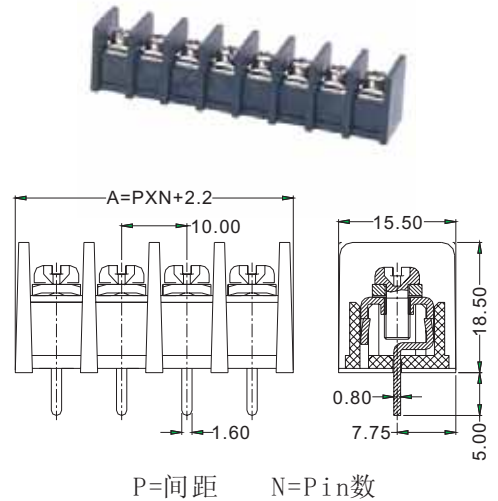


BRTB100-03- □□

技术参数(Technical Data)	BRTB100-03
间距 (Center Space)	10.0 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	10 Lbf-in
额定参数 (Electrical Parameters)	300V, 25A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	2.0 mm

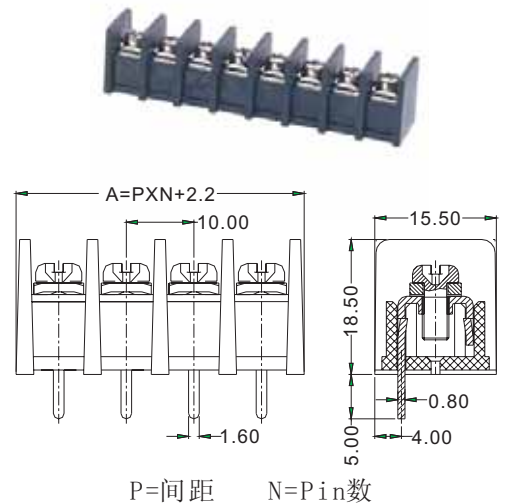

BRTB100-04- □□

技术参数(Technical Data)	BRTB100-04
间距 (Center Space)	10.0 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	10 Lbf-in
额定参数 (Electrical Parameters)	600V, 30A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	2.4 mm

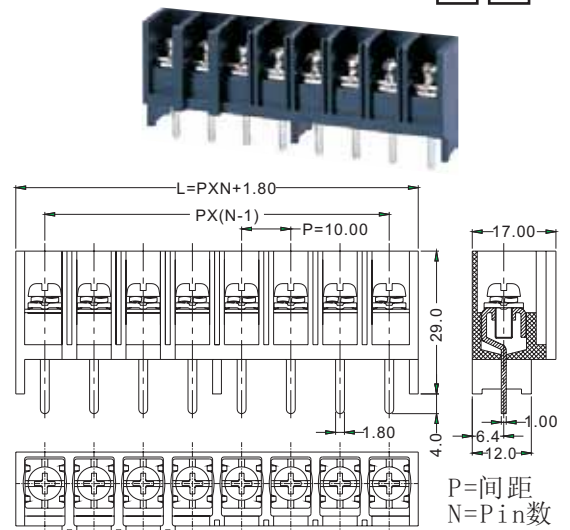


功率型接线端子 (Barrier terminal block)

技术参数(Technical Data)

BRTB100-05

间距 (Center Space)	10.0 mm
压线范围 (Wire Range)	18 ~ 10AWG
螺钉扭矩 (Screw Torque)	10 Lbf-in
额定参数 (Electrical Parameters)	600V, 30A
冲击电压 (Rated Surge Voltage)	AC2500V—一分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	2.4 mm

BRTB100-05-


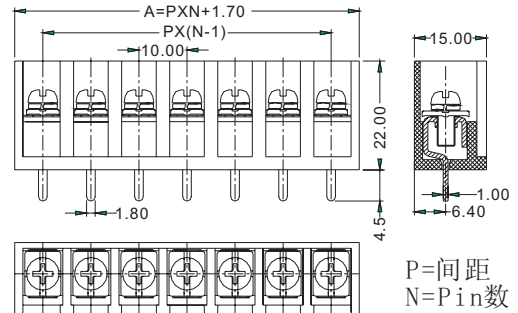


技术参数(Technical Data)

BRTB110-00

间距 (Center Space)	11.0 mm
压线范围 (Wire Range)	18 ~ 10AWG
螺钉扭矩 (Screw Torque)	13 Lbf-in
额定参数 (Electrical Parameters)	600V, 30A
冲击电压 (Rated Surge Voltage)	AC2500V—一分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	2.6 mm

BRTB110-00-

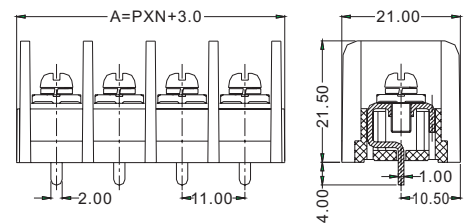



P=间距 N=Pin数

技术参数(Technical Data)

BRTB110-01

间距 (Center Space)	11.0 mm
压线范围 (Wire Range)	18 ~ 10AWG
螺钉扭矩 (Screw Torque)	13 Lbf-in
额定参数 (Electrical Parameters)	600V, 40A
冲击电压 (Rated Surge Voltage)	AC2500V—一分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	2.6 mm



BRTB110-01-

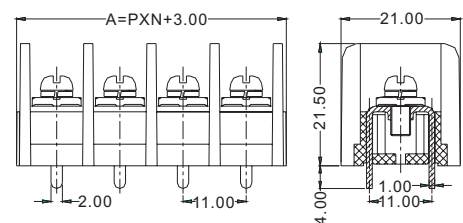

P=间距 N=Pin数

(Barrier terminal block) 功率型接线端子

BRTB110-02- □□

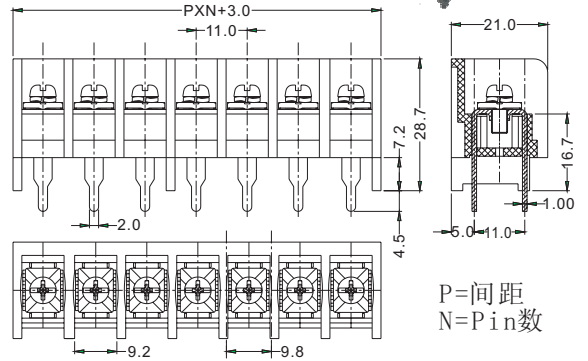


技术参数(Technical Data)

BRTB110-02

间距 (Center Space)	11.0 mm
压线范围 (Wire Range)	18 ~ 10AWG
螺钉扭矩 (Screw Torque)	13 Lbf-in
额定参数 (Electrical Parameters)	600V, 40A
冲击电压 (Rated Surge Voltage)	AC2500V—一分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	2.6mm

BRTB110-03- □□


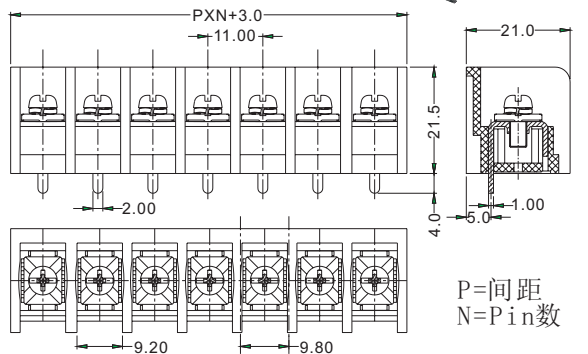


技术参数(Technical Data)

BRTB110-03

间距 (Center Space)	11.0 mm
压线范围 (Wire Range)	18 ~ 10AWG
螺钉扭矩 (Screw Torque)	13 Lbf-in
额定参数 (Electrical Parameters)	600V, 40A
冲击电压 (Rated Surge Voltage)	AC2500V—一分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	2.6 mm

BRTB110-04- □□

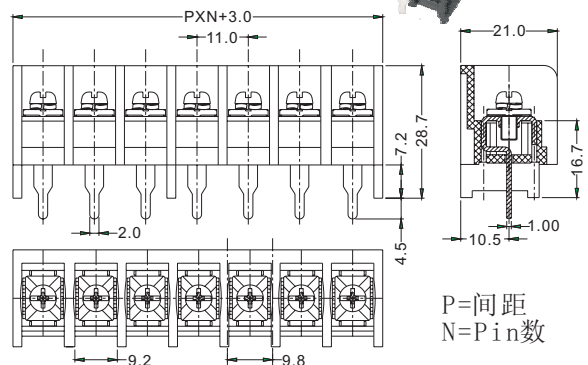

技术参数(Technical Data)

BRTB110-04

间距 (Center Space)	11.0 mm
压线范围 (Wire Range)	18 ~ 10AWG
螺钉扭矩 (Screw Torque)	13 Lbf-in
额定参数 (Electrical Parameters)	600V, 40A
冲击电压 (Rated Surge Voltage)	AC2500V—一分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	2.6 mm


功率型接线端子 (Barrier terminal block)

技术参数(Technical Data)

BRTB110-05

间距 (Center Space)	11.0 mm
压线范围 (Wire Range)	18 ~ 10AWG
螺钉扭矩 (Screw Torque)	13 Lbf-in
额定参数(Electrical Parameters)	600V,40A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M4, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	2.6 mm

BRTB110-05-

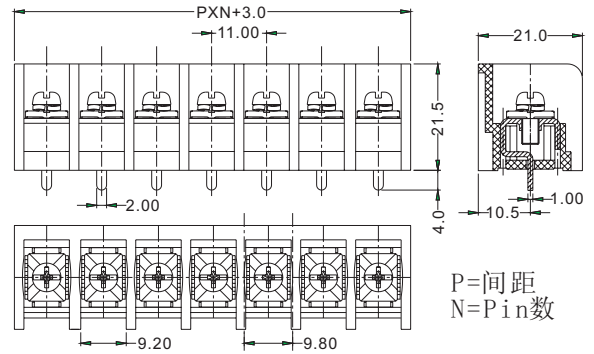


技术参数(Technical Data)

BRTB127-00

间距 (Center Space)	12.7 mm
压线范围 (Wire Range)	18 ~ 8 AWG
螺钉扭矩 (Screw Torque)	13 Lbf-in
额定参数(Electrical Parameters)	600V,45A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PBT, UL94, V-0
压线螺钉(Screw)	M4, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	3.7X2.0 mm

BRTB127-00-


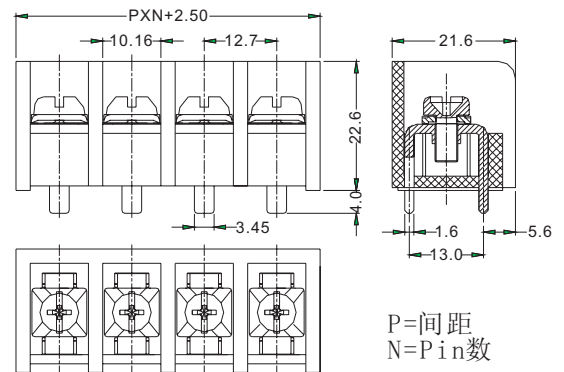


技术参数(Technical Data)

BRTB130-00

间距 (Center Space)	13.0 mm
压线范围 (Wire Range)	18 ~ 10AWG
螺钉扭矩 (Screw Torque)	13 Lbf-in
额定参数(Electrical Parameters)	600V,40A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PBT, UL94, V-0
压线螺钉(Screw)	M4, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	2.6 mm



BRTB130-00-

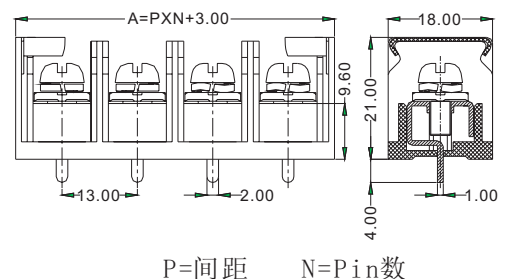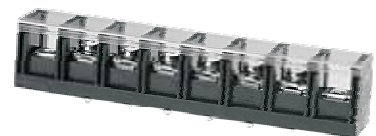

(Barrier terminal block) 功率型接线端子

BRTB130-01- □□



技术参数(Technical Data)	BRTB130-01
间距 (Center Space)	13.0 mm
压线范围 (Wire Range)	18 ~ 10AWG
螺钉扭矩 (Screw Torque)	13 Lbf-in
额定参数 (Electrical Parameters)	600V, 40A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PBT, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	5.4X1.4 mm

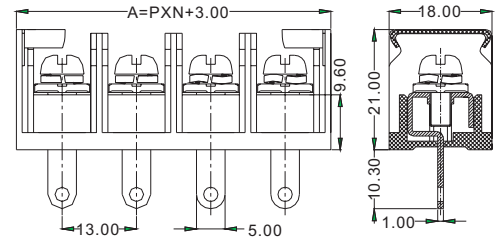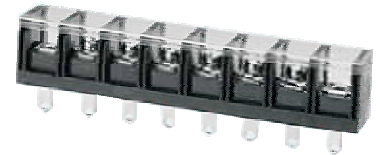

P=间距 N=Pin数

BRTB130-02- □□



技术参数(Technical Data)	BRTB130-02
间距 (Center Space)	13.0 mm
压线范围 (Wire Range)	18 ~ 10AWG
螺钉扭矩 (Screw Torque)	13 Lbf-in
额定参数 (Electrical Parameters)	600V, 40A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PBT, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	2.6 mm

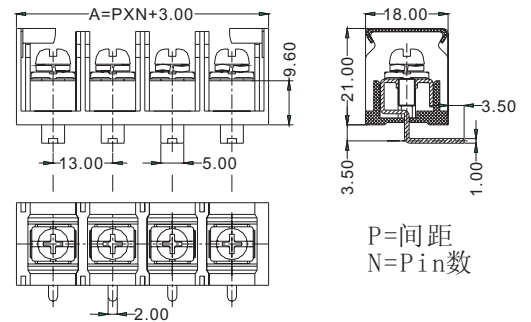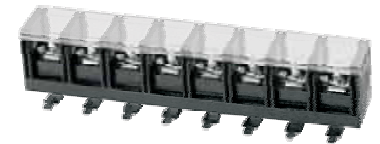

P=间距
N=Pin数

BRTB130-03- □□

技术参数(Technical Data)	BRTB130-03
间距 (Center Space)	13.0 mm
压线范围 (Wire Range)	18 ~ 10AWG
螺钉扭矩 (Screw Torque)	13 Lbf-in
额定参数 (Electrical Parameters)	600V, 40A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M4, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	

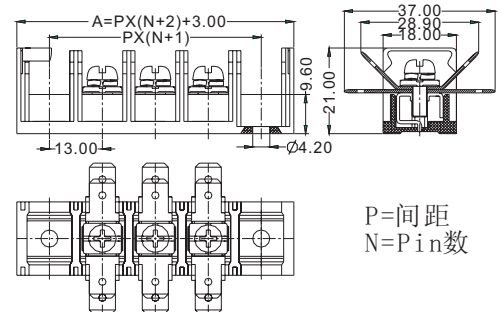

P=间距
N=Pin数



功率型接线端子 (Barrier terminal block)

技术参数(Technical Data)

BRTB130-04

间距 (Center Space)	13.0 mm
压线范围 (Wire Range)	18 ~ 10AWG
螺钉扭矩 (Screw Torque)	13 Lbf-in
额定参数(Electrical Parameters)	600V,40A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M4, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	5.4X1.4 mm

BRTB130-04- □□

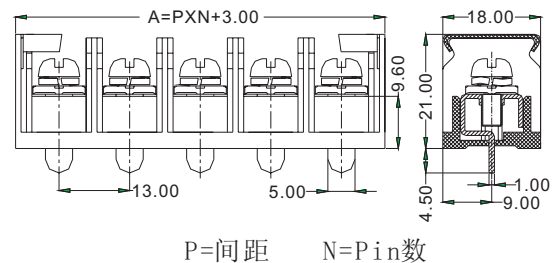
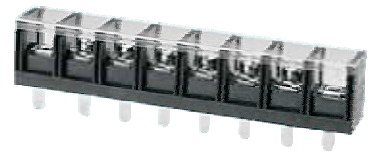


技术参数(Technical Data)

BRTB135-00

间距 (Center Space)	13.5 mm
压线范围 (Wire Range)	18 ~ 10 AWG
螺钉扭矩 (Screw Torque)	18 Lbf-in
额定参数(Electrical Parameters)	600V,40A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PBT, UL94, V-0
压线螺钉(Screw)	M5, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	6.2X1.6 mm

BRTB135-00- □□

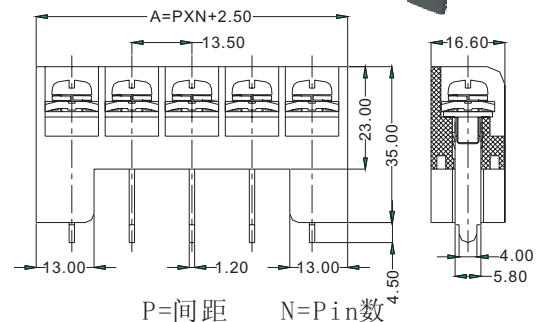
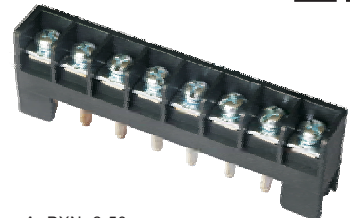


技术参数(Technical Data)

BRTB135-01

间距 (Center Space)	13.5 mm
压线范围 (Wire Range)	18 ~ 10 AWG
螺钉扭矩 (Screw Torque)	18 Lbf-in
额定参数(Electrical Parameters)	600V,40A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PBT, UL94, V-0
压线螺钉(Screw)	M5, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	6.2X1.6 mm



BRTB135-01- □□

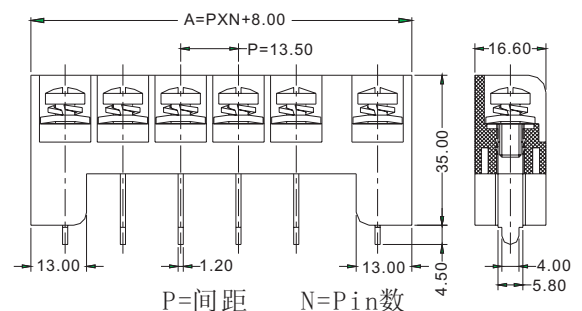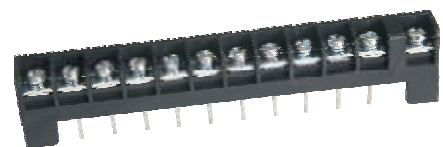

(Barrier terminal block) 功率型接线端子


BRTB135-02- □□

技术参数(Technical Data)	BRTB135-02
间距 (Center Space)	13.5 mm
压线范围 (Wire Range)	18 ~ 10AWG
螺钉扭矩 (Screw Torque)	18 Lbf-in
额定参数 (Electrical Parameters)	600V, 40A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PBT, UL94, V-0
压线螺钉 (Screw)	M5, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	6.2X1.6 mm

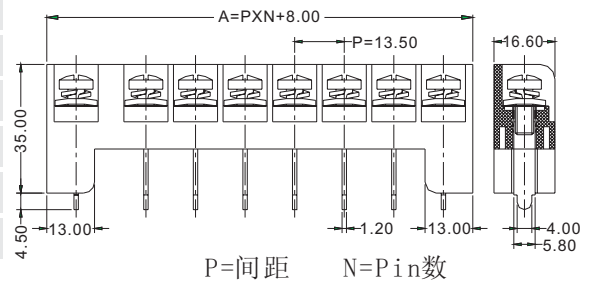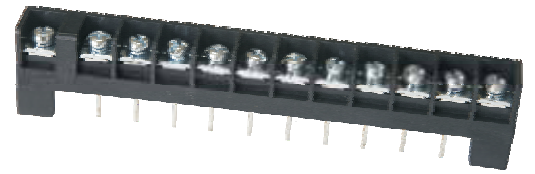



BRTB135-03- □□

技术参数(Technical Data)	BRTB135-03
间距 (Center Space)	13.5 mm
压线范围 (Wire Range)	18 ~ 10AWG
螺钉扭矩 (Screw Torque)	18 Lbf-in
额定参数 (Electrical Parameters)	600V, 40A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PBT, UL94, V-0
压线螺钉 (Screw)	M5, Steel Ni plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	6.2X1.6 mm

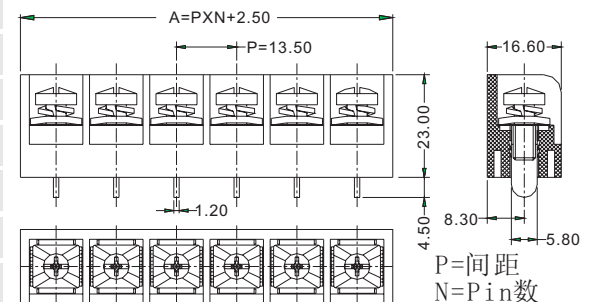

BRTB135-04- □□

技术参数(Technical Data)	BRTB135-04
间距 (Center Space)	13.5 mm
压线范围 (Wire Range)	18 ~ 10 AWG
螺钉扭矩 (Screw Torque)	18 Lbf-in
额定参数 (Electrical Parameters)	600V, 40A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PBT, UL94, V-0
压线螺钉 (Screw)	M5, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	6.2X1.6 mm

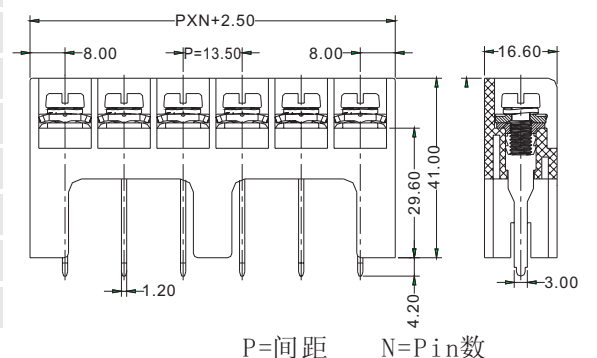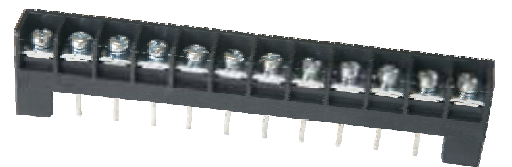



功率型接线端子 (Barrier terminal block)

技术参数(Technical Data)

BRTB145-00

间距 (Center Space)	14.5 mm
压线范围 (Wire Range)	18 ~ 8 AWG
螺钉扭矩 (Screw Torque)	20 Lbf-in
额定参数 (Electrical Parameters)	600V, 50A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PBT, UL94, V-0
压线螺钉 (Screw)	M5, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	3.2X1.9 mm

BRTB145-00- □□

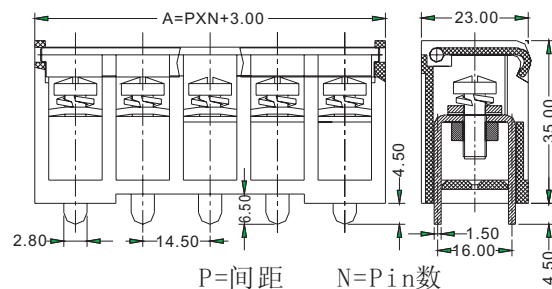


技术参数(Technical Data)

BRTB145-01

间距 (Center Space)	14.5 mm
压线范围 (Wire Range)	18 ~ 8 AWG
螺钉扭矩 (Screw Torque)	20 Lbf-in
额定参数 (Electrical Parameters)	600V, 40A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PBT, UL94, V-0
压线螺钉 (Screw)	M5, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	5.4X1.6 mm

BRTB145-01- □□

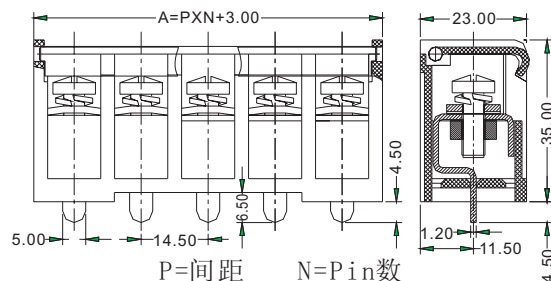


技术参数(Technical Data)

BRTB145-02

间距 (Center Space)	14.5 mm
压线范围 (Wire Range)	18 ~ 8 AWG
螺钉扭矩 (Screw Torque)	20 Lbf-in
额定参数 (Electrical Parameters)	600V, 60A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PBT, UL94, V-0
压线螺钉 (Screw)	M5, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	5.4X2.4 mm

BRTB145-02- □□

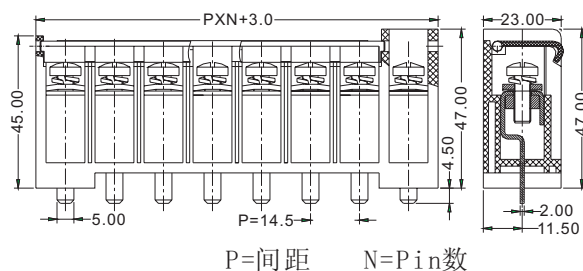

(Barrier terminal block) 功率型接线端子


技术参数(Technical Data)

BRTB200-00

BRTB200-00- □□



间距 (Center Space)	20.0 mm
压线范围 (Wire Range)	18 ~ 4 AWG
螺钉扭矩 (Screw Torque)	25 Lbf-in
额定参数(Electrical Parameters)	600V,80A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PA, UL94, V-0
压线螺钉(Screw)	M6,Steel Ni Plated
焊接端子(Terminal Body)	Brass,Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	10.4X2.40 mm

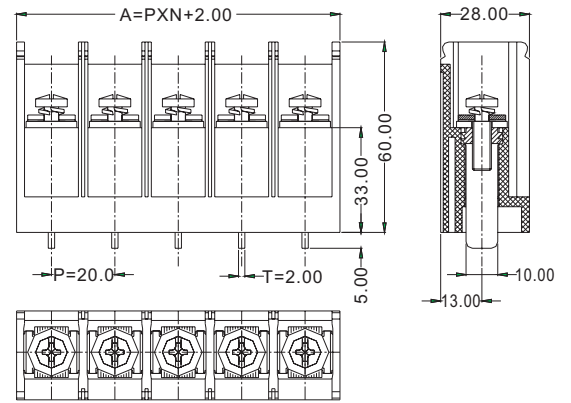


P=间距 N=Pin数


技术参数(Technical Data)

BRTB200-01

BRTB200-01- □□

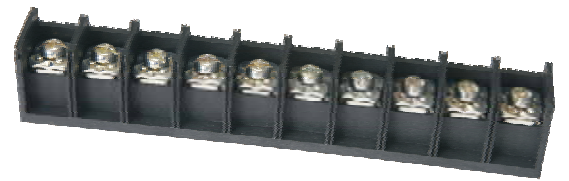

间距 (Center Space)	20.0 mm
压线范围 (Wire Range)	18 ~ 4 AWG
螺钉扭矩 (Screw Torque)	25 Lbf-in
额定参数(Electrical Parameters)	600V,80A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PA, UL94, V-0
压线螺钉(Screw)	M6, Steel Ni Plated
焊接端子(Terminal Body)	Brass,Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	10.4X2.4 mm

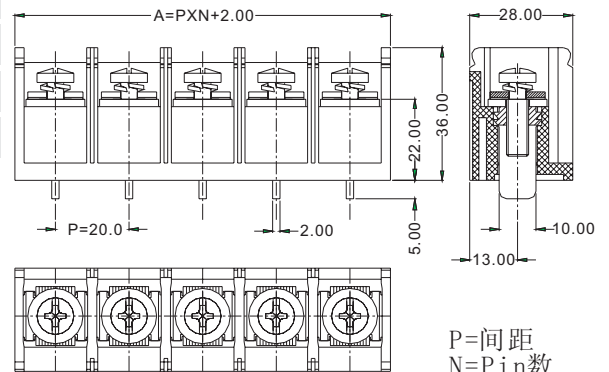

P=间距
N=Pin数


功率型接线端子 (Barrier terminal block)

技术参数(Technical Data)

BRTB825-06

间距 (Center Space)	8.25 mm
压线范围 (Wire Range)	22 ~ 12AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数(Electrical Parameters)	600V, 20A
冲击电压 (Rated Surge Voltage)	AC2000V—一分钟
绝缘本体 (Insulation Body)	PBT, UL94, V-0
压线螺钉(Screw)	M3, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	1.7 mm

BRTB825-06- □□

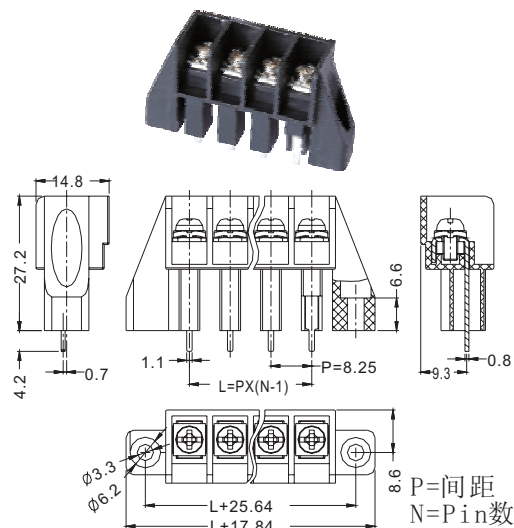


技术参数(Technical Data)

BRTB825-07

间距 (Center Space)	11.0 mm
压线范围 (Wire Range)	22 ~ 10AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数(Electrical Parameters)	300V, 25A
冲击电压 (Rated Surge Voltage)	AC2000V—一分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉(Screw)	M3, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	2.20 mm

BRTB825-07- □□

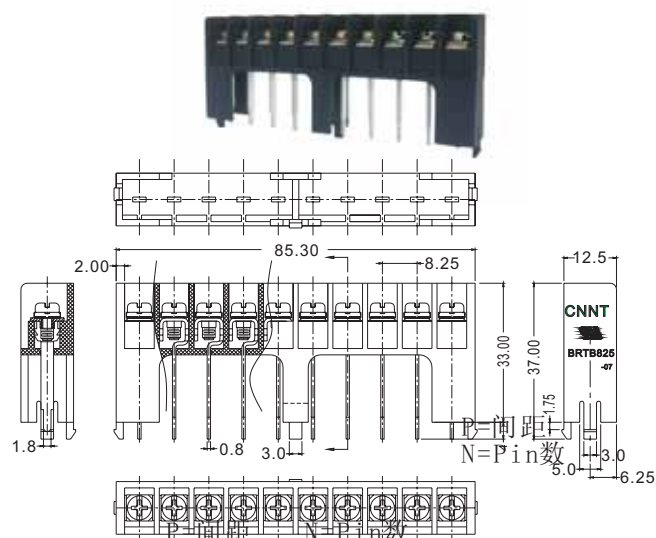


技术参数(Technical Data)

BRTB110-06

间距 (Center Space)	11.0 mm
压线范围 (Wire Range)	22 ~ 10 AWG
螺钉扭矩 (Screw Torque)	13 Lbf-in
额定参数(Electrical Parameters)	600V, 30A
冲击电压 (Rated Surge Voltage)	AC2000V—一分钟
绝缘本体 (Insulation Body)	Pa66, UL94, V-0
压线螺钉(Screw)	M4, Steel Ni Plated
焊接端子(Terminal Body)	Brass, Tin Plated
使用温度(Operating Temperature)	-40℃ ~ +120℃
PCB孔径(PCB Holes Diameter)	2.50 mm

BRTB110-06- □□

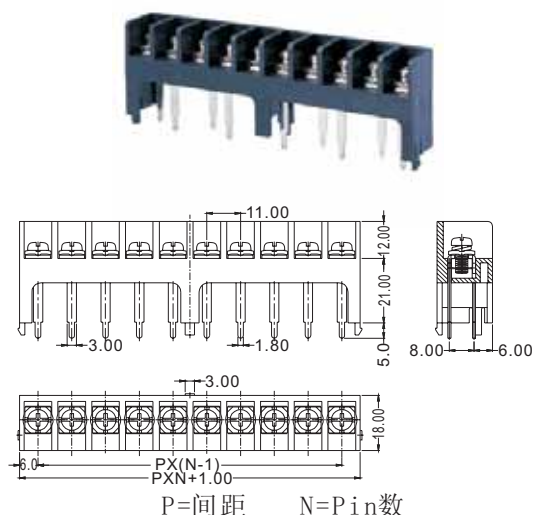


(Barrier terminal block) 功率型接线端子

技术参数(Technical Data)

BRTB950-08

间距 (Center Space)	9.50 mm
压线范围 (Wire Range)	18 ~ 10 AWG
螺钉扭矩 (Screw Torque)	13 Lbf-in
额定参数 (Electrical Parameters)	600V, 30A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PA66, UI94, V-0
压线螺钉 (Screw)	M6, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	3.00 mm

BRTB950-08- □□

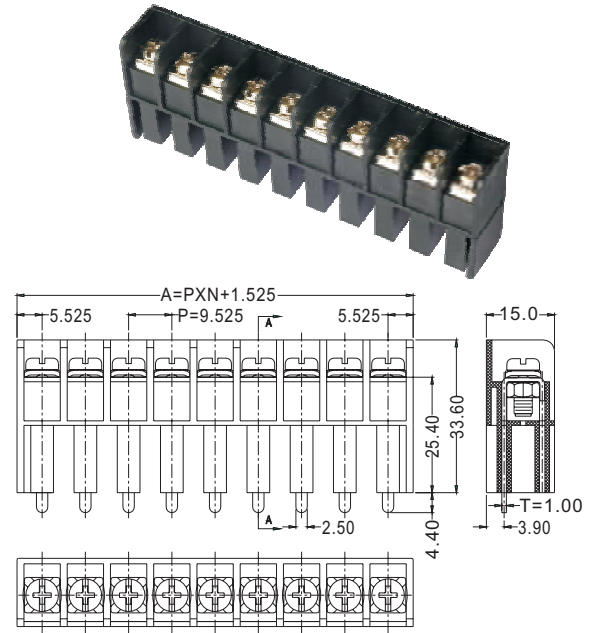


P=间距 N=Pin数

技术参数(Technical Data)

BRTB950-08

间距 (Center Space)	9.50 mm
压线范围 (Wire Range)	18 ~ 10 AWG
螺钉扭矩 (Screw Torque)	13 Lbf-in
额定参数 (Electrical Parameters)	600V, 30A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PA66, UI94, V-0
压线螺钉 (Screw)	M4, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	3.00 mm

BRTB950-08- □□ -MT


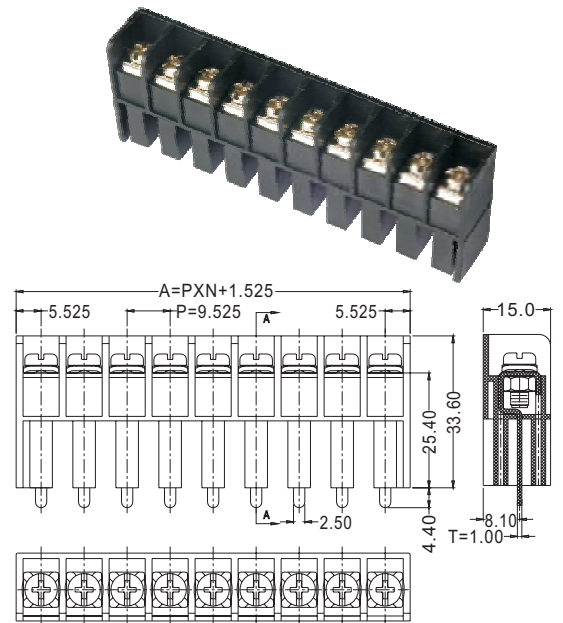


功率型接线端子 (Barrier terminal block)

技术参数(Technical Data)

BRTB762-05

BRTB762-05- □□


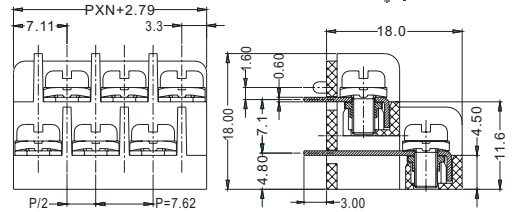


间距 (Center Space)	7.62 mm
压线范围 (Wire Range)	22 ~ 14 AWG
螺钉扭矩 (Screw Torque)	7 Lbf-in
额定参数 (Electrical Parameters)	300V, 15A
冲击电压 (Rated Surge Voltage)	AC2000V—分钟
绝缘本体 (Insulation Body)	PA66, UI94, V-0
压线螺钉 (Screw)	M3, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	1.60 mm

技术参数(Technical Data)

BRTB130-05

BRTB130-05- □□

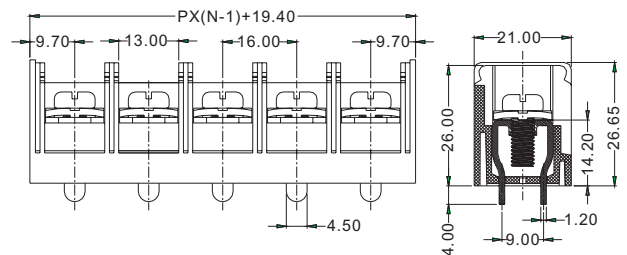



P=间距 N=Pin数

间距 (Center Space)	16.0 mm
压线范围 (Wire Range)	14 ~ 4AWG
螺钉扭矩 (Screw Torque)	15 Lbf-in
额定参数 (Electrical Parameters)	600V, 75A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M5, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	5.80X1.70 mm

技术参数(Technical Data)

BRTB130-06

BRTB130-06- □□


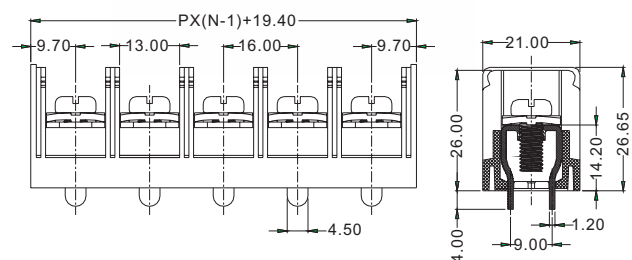


P=间距 N=Pin数

间距 (Center Space)	16.0 mm
压线范围 (Wire Range)	14 ~ 4 AWG
螺钉扭矩 (Screw Torque)	15 Lbf-in
额定参数 (Electrical Parameters)	600V, 75A
冲击电压 (Rated Surge Voltage)	AC2500V—分钟
绝缘本体 (Insulation Body)	PA6.6, UL94, V-0
压线螺钉 (Screw)	M5, Steel Ni Plated
焊接端子 (Terminal Body)	Brass, Tin Plated
使用温度 (Operating Temperature)	-40℃ ~ +120℃
PCB孔径 (PCB Holes Diameter)	5.80X1.70 mm

(Barrier terminal block) 功率型接线端子



ACTB001



ACTB001

额定电流 100A
端子 铜, 镀锡
螺钉 M4
扭矩 1.20 Nm



ACTB002

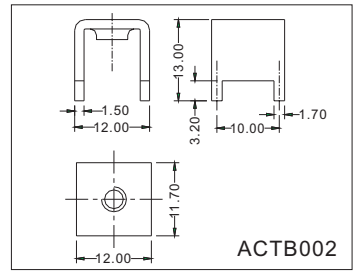

ACTB002

额定电流 75A
端子 铜, 镀锡
螺钉 M4
扭矩 1.20 Nm



ACTB004



ACTB004

额定电流 100A
端子 铜, 镀锡
螺钉 M4
扭矩 1.70 Nm


ACTB005

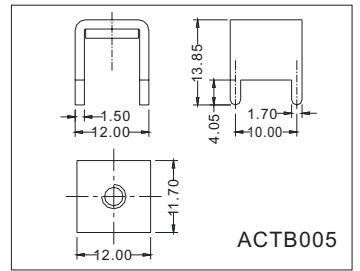

ACTB005

额定电流 75A
端子 铜, 镀锡
螺钉 M4
扭矩 1.70 Nm


ACTB005-2



ACTB005-2

额定电流 75A
端子 铜, 镀锡
螺钉 M4
扭矩 1.5 Nm

ACTB006

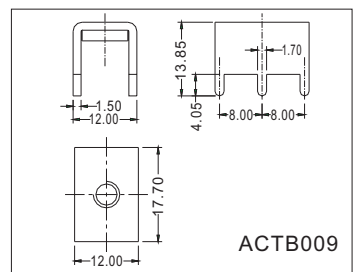


ACTB009

额定电流 115A
端子 铜, 镀锡
螺钉 M5
扭矩 3.0 Nm


功率型接线端子(Barrier terminal block)

ACTB010

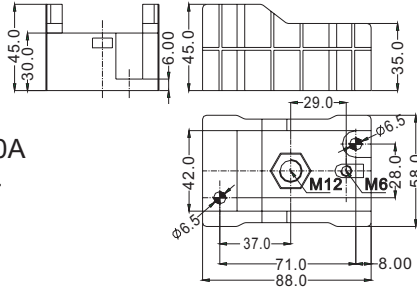



额定电参数 600V 600A
端子 PA66+GF
螺钉 M12
扭矩 20.0 Nm

ACTB010-A

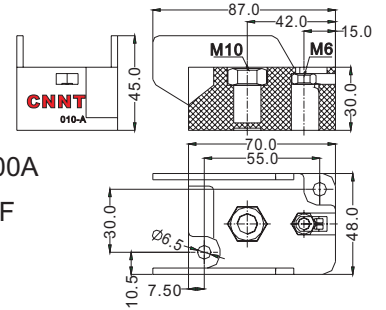


额定电参数 600V 400A
端子 PA66+GF
螺钉 M10
扭矩 15.0 Nm

ACTB006-2




额定电流 115A
端子 铜, 镀锡
螺钉 M5
扭矩 3.00 Nm

ACTB009

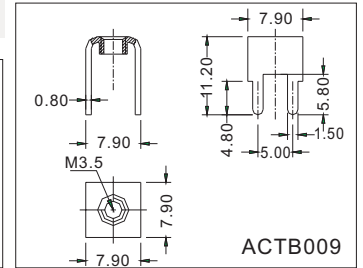



额定电流 35A
端子 铜, 镀锡
螺钉 M3.5
扭矩 1.20 Nm

ACTB011



额定电流 45 A
端子 铜, 镀锡
螺钉 M4
扭矩 1.50 Nm


ACTB011-A

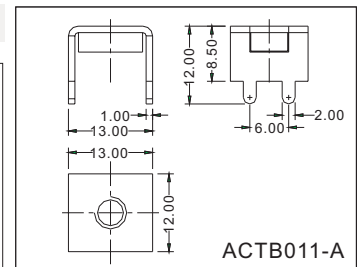

额定电流 60 A
端子 铜, 镀锡
螺钉 M5
扭矩 2.50 Nm


功率型接线端子(Barrier terminal block)

ACTB010-B

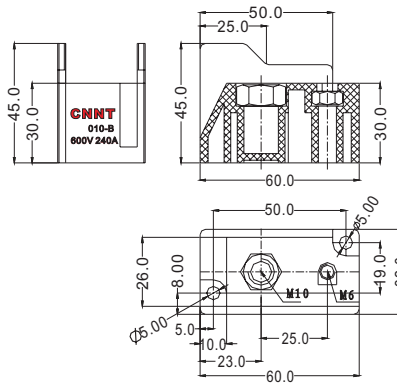



额定电参数	600V 240A
端子	PA66+GF
螺钉	M10
扭矩	15.0 Nm

ACTB011-D





额定电流	75A
端子	铜, 镀锡
螺钉	M4
扭矩	1.50 Nm

ACTB012

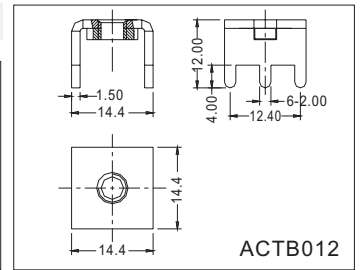


额定电流	115A
端子	铜, 镀锡
螺钉	M5
扭矩	3.00 Nm

ACTB013



额定电流	30 A
端子	铜, 镀锡
螺钉	M4
扭矩	1.70 Nm



ACTB014

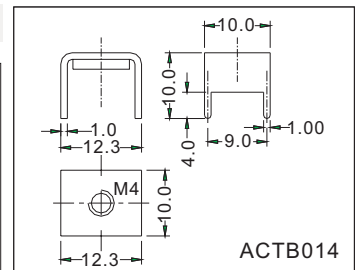

额定电流	30 A
端子	铜, 镀锡
螺钉	M4
扭矩	1.70 Nm



(Barrier terminal block) 功率型接线端子

ACTB015





额定电流 45A
端子 铜, 镀锡
螺钉 M3
扭矩 1.20 Nm

ACTB019

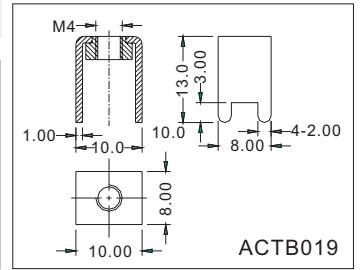



额定电流 60A
端子 铜, 镀锡
螺钉 M4
扭矩 1.20 Nm

ACTB020




额定电流 100A
端子 铜, 镀锡
螺钉 M8
扭矩 1.70 Nm

ACTB021

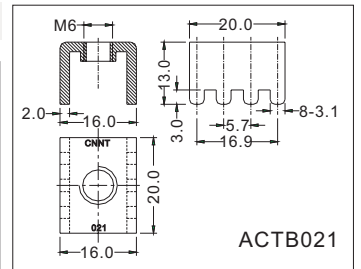

额定电流 150A
端子 铜, 镀锡
螺钉 M6
扭矩 2.50 Nm

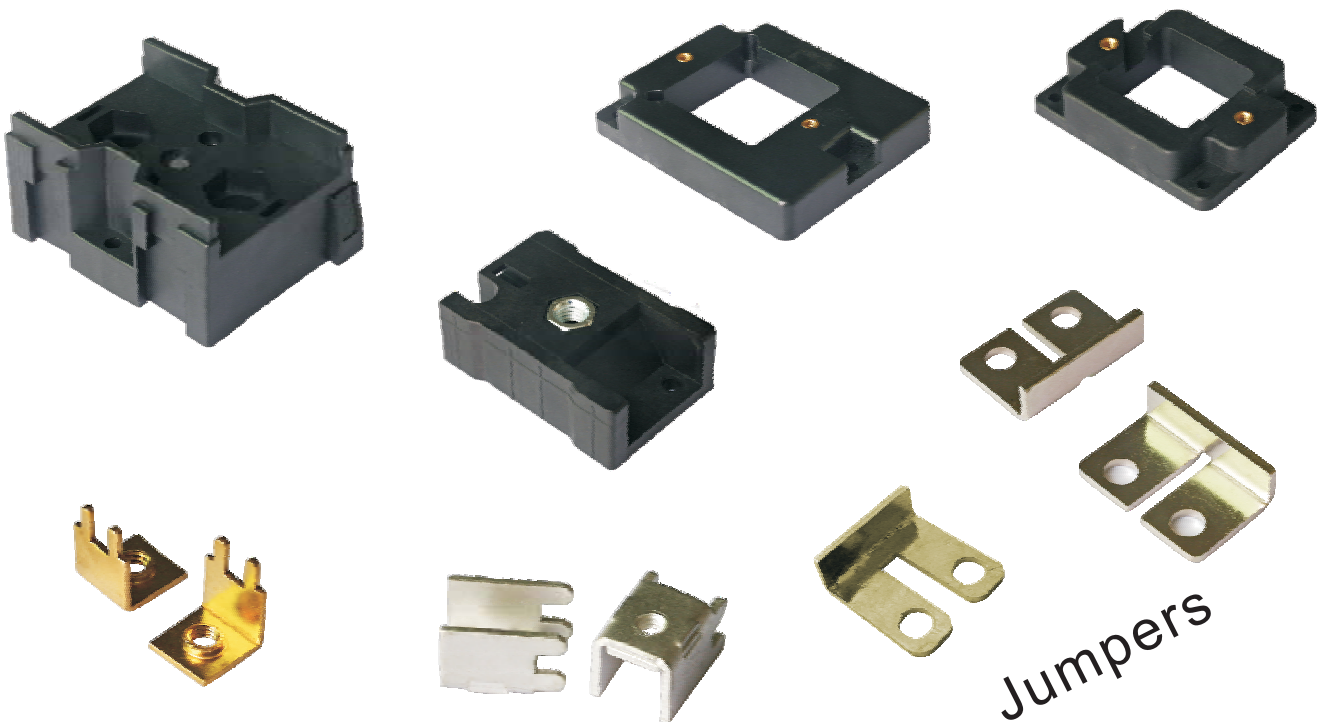

Jumpers