


Technical data sheet Junction box, FireBox T 160

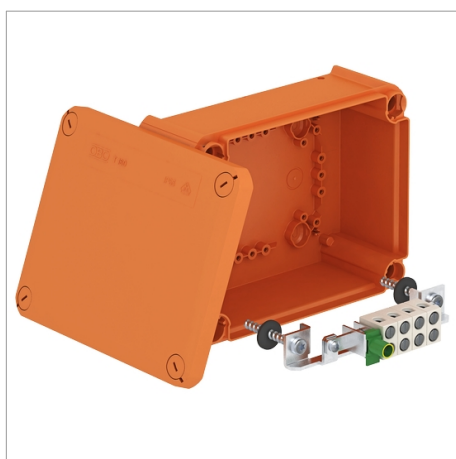


Halogen-free junction box, approved for electrical function maintenance

according to DIN 4102 Part 12. Function maintenance classes E30 to E90

Including pre-mounted connection unit made of high temperature-resistant special ceramic and labelled protective conductor terminal. Supplied with fire protection screw ties for anchorless fastening.

Power cable nominal cross-sections: 10 mm², data cables with 0.8 mm wire Ø. Maximum of two 4 mm² rigid copper cables per terminal (remove wire protection).

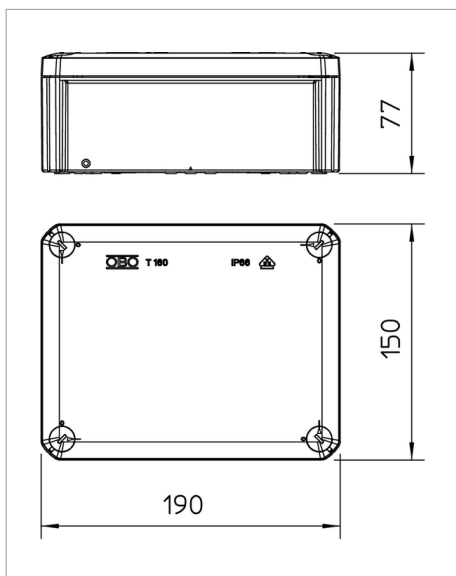

High protection rating IP65, impact resistance class IK07. VDE-tested.

Details on the cable types and manufacturers can be found in the general construction test certificate of the material testing institute MPA NRW, Erwitte.

Number of terminals including protective conductor terminal:

Internal clearance: 176 x 135 x 67 mm



Type	Colour	Box quantity	Pack. pcs	Weight kg/100 pcs.	Art.-No.
T 160 E 10-5	Pastel orange; RAL 2003	5	1	48.700	7205524
T 160 E 16-5	Pastel orange; RAL 2003	5	1	53.800	7205528

PP Polypropylene

/pc.