



Technical data sheet Cable connection sleeve

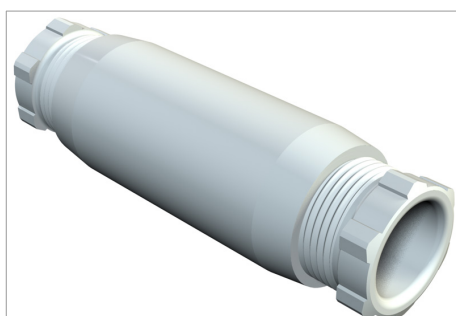

Protection rating IP54, nominal voltage 660 V. VDE specifications state that connection sleeves are only intended for local routing.

117/2.5 VDE / PG 16: nominal cross-section 2.5 mm², with 5-pole terminal insert 2.5 mm² and cable entries with strain relief for cable diameter 9–14 mm.

117/6 VDE / PG 21: nominal cross-section 6 mm², with 5-pole terminal insert 6 mm² and cable entries with strain relief for cable diameter 12–18 mm.

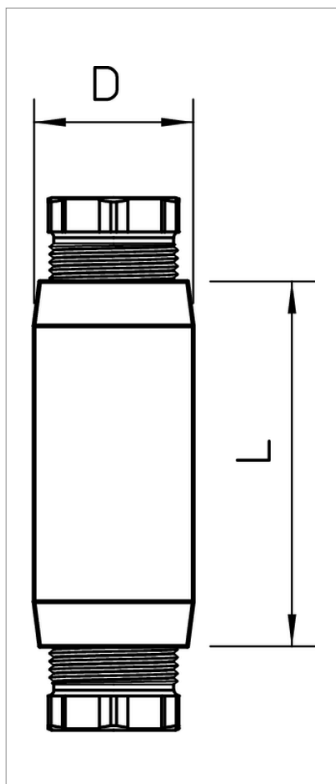

Type	Entries	Dimensi on D mm	Dimensi on L mm	Colour	Box quantity	Pack. pcs	Weight kg/100 pcs.	Art.-No.
117 5x2.5	Pg 16	28	64	Light grey; RAL 7035	100	10	5.310	202202 8
117 5x6	Pg 21	33.5	82	Light grey; RAL 7035	60	5	14.600	202206 0

PS Polystyrene

/100

