


Technical data sheet Screw-in nipple, metric thread

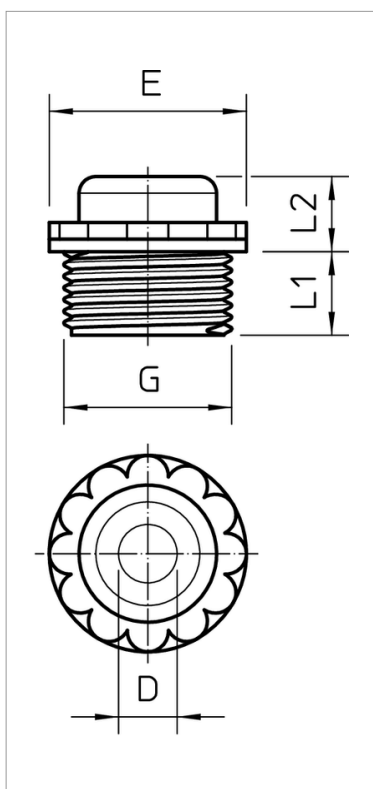

With perforation membranes, the opening D is pre-marked, but closed.

Grip seal to screw into metric thread to IEC 423.

With self-sealing cone at the end of the thread, therefore no connection thread sealing ring required.

Protection rating achievable with careful mounting: IP54.

Type	Thread	Colour	Dimension D mm	SW mm	Dimension E mm	Dimension L1 mm	Dimension L2 mm	Box quantity	Pack. pcs	Weight t kg/100 pcs.	Art.-No.
90 M12 GE	M12 x 1,5	Light grey; RAL 7035	3.5	13	17	8	6	3000	100	0.170	2032378
90 M16 GE	M16 x 1,5	Light grey; RAL 7035	5	16	20	8	6	2600	100	0.192	2032380
90 M20 GE	M20 x 1,5	Light grey; RAL 7035	7	21	24	10	6	1600	100	0.268	2032382
90 M25 GE	M25 x 1,5	Light grey; RAL 7035	8.5	30	32	12	6	500	50	0.513	2032384
90 M32 GE	M32 x 1,5	Light grey; RAL 7035	13	34	39	14	8	250	25	0.694	2032386
90 M40 GE	M40 x 1,5	Light grey; RAL 7035	16	44	48	16	8	120	10	0.875	2032388

PE Polyethylene

/100

