

Technical data sheet

Screw-in nipple, PG thread with opening




With open cable entry.

Grip seal to screw into PG thread end to DIN 40430.

With self-sealing cone at the end of the thread, therefore no connection thread sealing ring required.

Protection rating achievable with careful mounting: IP54.

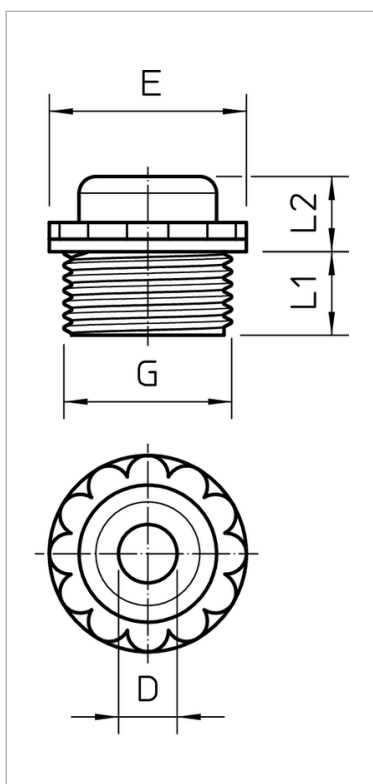

Type	Thread	Colour	Box quantity	Pack. pcs	Weight kg/100 pcs.	Art.-No.
90 PG 9 OF	Pg 9	Light grey; RAL 7035	2700	100	0.192	2032090
90 PG11 OF	Pg 11	Light grey; RAL 7035	1200	100	0.200	2032112
90 PG13.5 OF	Pg 13,5	Light grey; RAL 7035	1000	100	0.268	2032139
90 PG16 OF	Pg 16	Light grey; RAL 7035	1000	100	0.291	2032163
90 PG21 OF	Pg 21	Light grey; RAL 7035	500	50	0.513	2032201

PE Polyethylene

/100

