

Technical data sheet

Steel wire tensioning rope V4A




Cable Ø 2 - 6 mm: round-stranded cable 6 x 7 according to DIN 3055.

Cable Ø 8 - 10 mm: round-stranded cable 6 x 19 according to DIN 3060.

Minimum break force 1770 N/mm².

Application for exterior areas |

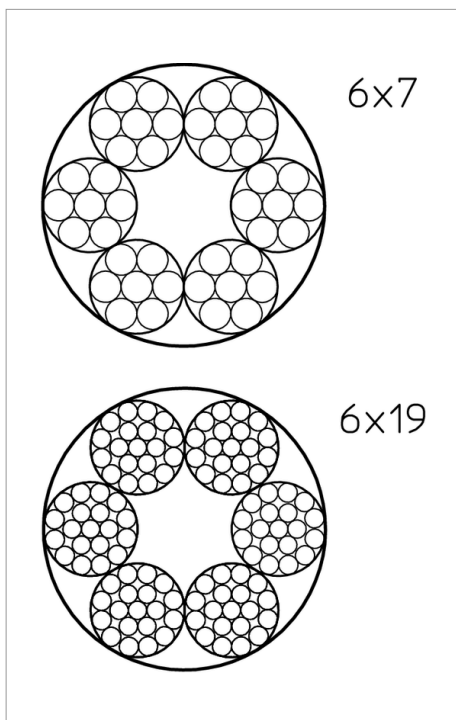

Type	Cable diameter mm	Breaking load kN	in rings m	Weight kg/100 m	Art-No.
957 2 V4A	2	2.35	50	1.430	5303179
957 3 V4A	3	5.29	50	3.220	5303182
957 4 V4A	4	9.41	50	5.720	5303185
957 5 V4A	5	14.7	50	8.940	5303188
957 6 V4A	6	21.1	50	12.900	5303191
957 8 V4A	8	34.8	50	22.900	5303194
957 10 V4A	10	54.4	50	35.700	5303197

VA Stainless steel, grade 316

/100

