

UVARAY

Medium Pressure UV Systems

UV

The UVARAY 45-1000 is designed to offer commercial swimming pools a reliable medium pressure UV system for disinfection and improved water quality.

APPLICATIONS

- Swimming pool disinfection

MAIN CHARACTERISTICS

- Medium pressure UV system for commercial swimming pool disinfection and chloramine reduction

MAIN FEATURES

- Medium pressure UV
- Microprocessor control with data logging and language option
- Smartdrive' automatic wiper system with manual override
- Outputs for connection to building management systems
- Automatic low power option
- Simple to install and operate with minimal space requirements
- UL Listed
- NSF 50 certified
- Substantial reduction of chloramines

UV TECHNOLOGY: UVARAY 45-1000

The UVARAY medium pressure UV system is designed for disinfection of commercial swimming pools. Medium pressure UV systems are particularly effective against the highly infectious *Cryptosporidium Parvum* and *Giardia Lamblia* species which are virtually unaffected by the use of chlorine alone.

As UV is not a residual disinfectant, a chlorine residual is required to prevent cross infection between bathers. High proportions of combined chlorine products (chloramines) in circulating water are destroyed by the UV irradiation process. Removal of these compounds greatly improve bathing water quality, reducing skin and eye irritation and removing the common and unpleasant "swimming pool" odour.

HOW IT WORKS

The medium pressure UV lamp is powered by magnetic ballasts housed within a separate wall mounted control panel. The wide spectral distribution of the Triogen lamp produces the simultaneous treatment of several aspects of the circulating pool water as described above.

Lamp power can be set using the digital control panel. When the pool is not in use, the lamp output can automatically adjust to low, providing efficient disinfection with a 50% reduction in power consumption. The UV reactor incorporates a time controlled automatic wiper system which allows cleaning of the internal thimble housing the UV lamp.



TECHNICAL FEATURES

- CE Approval
- BS4504
- ANSI 150
- NSF
- UL

MATERIALS

- Reactor vessel: 316L stainless steel
- Flanges: BS4504 or ANSI 150
- Lamp: high purity quartz
- Thimble: high purity quartz
- Wiper Ring: spring loaded PTFE
- Panel: mild steel epoxy painted

REMOTE CONTROLS AND SIGNALS


- Lamp failure display alarm
- Lamp change display alarm
- Reactor temperature display alarm
- Low UV intensity display alarm

OPTIONS

- Stainless steel bends
- Inline basket strainers

MODEL	Flow Rates ⁽¹⁾		Lamp Power	Supply Rating	L x H x W	
	m ³ /h	US gpm			mm	inch
UVARAY 45	45	200	1.6	400-480/ 3/50-60	600 x 800 x 200	23.6 x 31.5 x 7.9
UVARAY 90	90	400	3.1		600 x 800 x 200	23.6 x 31.5 x 7.9
UVARAY 125	125	550	3.1		600 x 800 x 200	23.6 x 31.5 x 7.9
UVARAY 210	210	920	6.1		600 x 1000 x 300	23.6 x 39.4 x 11.8
UVARAY 300	300	1330	6.1		600 x 1000 x 300	23.6 x 39.4 x 11.8
UVARAY 400	400	1760	6.1		600 x 1000 x 300	23.6 x 39.4 x 11.8
UVARAY 600	600	2640	2 x 6 = 12		600 x 1800 x 500	23.6 x 70.9 x 19.7
UVARAY 750	750	3300	2 x 6 = 12		600 x 1800 x 500	23.6 x 70.9 x 19.7
UVARAY 1000	1000	4400	3 x 6 = 18		600 x 1800 x 500	23.6 x 70.9 x 19.7

(1) Flowrates based on a dose of 60mj/cm² at end of lamp file.

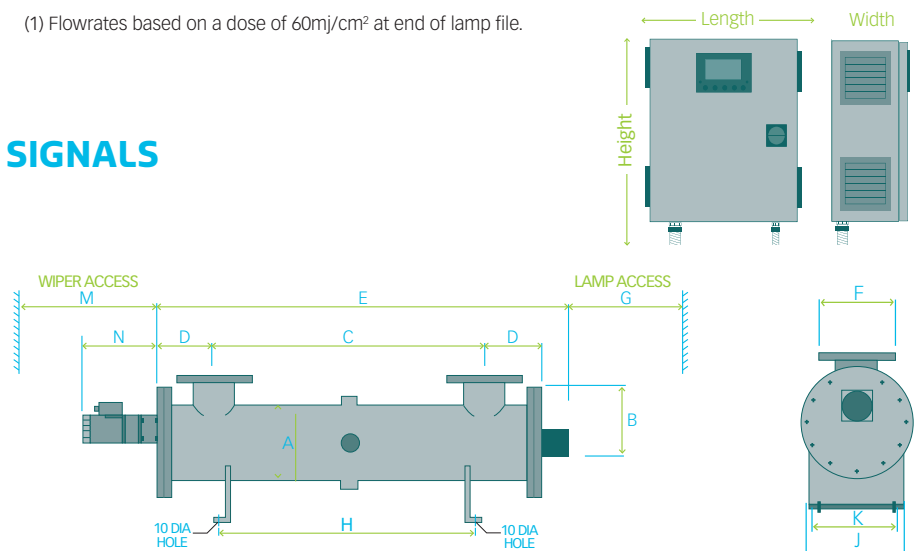

MODEL	Reactor Dimensions (mm/inch)													Flange (inch)
	A	B	C	D	E	F	G	H	J	K	L	M	N	
UVARAY 45	200/7.8	175/6.9	700/27.6	145/5.7	1065/41.9	275/10.8	900/35.4	700/27.6	170/6.7	200/7.9	150/5.8	350/13.8	285/11.2	3
UVARAY 90	200/7.8	175/6.9	600/23.6	195/7.7	1065/41.9	275/10.8	900/35.4	700/27.6	170/6.7	200/7.9	150/5.8	350/13.8	285/11.2	6
UVARAY 125	250/9.8	200/7.9	600/23.6	195/7.7	1065/41.9	325/12.8	900/35.4	700/27.6	220/8.6	250/9.8	175/6.9	350/13.8	285/11.2	6
UVARAY 210	250/9.8	200/7.9	900/35.4	220/8.6	1415/55.7	325/12.8	1250/49.2	1000/39.4	220/8.6	250/9.8	175/6.9	350/13.8	285/11.2	8
UVARAY 300	300/11.8	250/9.8	900/35.4	220/8.6	1415/55.7	375/14.6	1250/49.2	1000/39.4	270/10.6	300/11.8	200/7.9	350/13.8	285/11.2	8
UVARAY 400	400/15.7	300/11.8	840/33.0	250/9.8	1415/55.7	475/17.7	1250/49.2	1000/39.4	370/34.8	400/15.7	250/9.8	350/13.8	285/11.2	10
UVARAY 600	350/13.8	275/10.8	780/30.7	280/11	1415/55.7	425/16.7	1250/49.2	1000/39.4	320/12.6	350/13.8	250/9.8	350/13.8	285/11.2	12
UVARAY 750	400/15.7	300/11.8	780/30.7	280/11	1415/55.7	475/17.7	1250/49.2	1000/39.4	370/34.8	400/15.7	250/9.8	350/13.8	285/11.2	12
UVARAY 1000	400/15.7	300/11.8	720/28.3	310/12.2	1415/55.7	475/17.7	1250/49.2	1000/39.4	370/34.8	400/15.7	250/9.8	350/13.8	285/11.2	14

CONTACT

TRIOGEN Ltd
Unit 14 Langlands Place
East Kilbride G75 0YF
Scotland, United Kingdom
Tel: + 44 (0) 13 55 220 598
Fax: + 44 (0) 13 55 570 058
www.triogen.com
info@triogen.com

your local distributor: