

UV 250-500 Ozone Systems

UV

The UV250 and 500 range provides residential swimming pools with a cost effective ozone disinfection system for improved water quality.

APPLICATIONS

- Swimming pool and spa disinfection

MAIN CHARACTERISTICS

- Ozone systems producing up to 0.5 g/h for swimming pool and spa disinfection

MAIN FEATURES

- Safely lowers free chlorine residual
- Effective against chlorine resistant micro-organisms
- Reduced skin and eye irritation
- Very low THM levels
- Significant improvement in water clarity
- Easy UV lamp replacement and cleaning
- Simple to install and operate with minimal plant room space requirements

OZONE TECHNOLOGY: UV OZONE SYSTEMS

The UV250 and UV500 range is designed for disinfection of residential spas and swimming pools. Ozone provides effective treatment against chlorine resistant micro-organisms and significantly improves water clarity.

The range incorporates one or two high intensity UV lamps which are used for ozone production. Ozone output of the UV250 is 0.25 g/h and the output of the UV500 is 0.5 grams/hour.

HOW IT WORKS

Ozone is produced when ambient air passes over one (UV250) or two (UV500) high intensity UV lamps. The systems operate under vacuum conditions created by a water driven venturi ensuring maximum safety in operation.

Designed for long term reliability and easy operation, the units incorporate an ozone resistant gas tight compartment inside which the UV lamps are located.



TECHNICAL DATA UV OZONE SYSTEMS MODEL	Ozone Output	Maximum Pool Volume		L x H x W		Weight
	g/h	m ³	US Gallons	mm	inch	kg/lb
UV250	0.25	70	18,500	115 x 440 x 110	4.5 x 17.3 x 4.3	3.5/7.71
UV500	0.50	140	37,000	115 x 440 x 110	4.5 x 17.3 x 4.3	3.8/8.37

TECHNICAL FEATURES

- BS EN ISO 9002:94
- CE Approval

MATERIALS



- UV250 and UV500: mild steel, epoxy coated

REMOTE CONTROLS AND SIGNALS

- Ozone on: red illuminator switch


OPTIONS

- Booster pump
- Ozone Injector
- Vent destructor
- Degasser unit

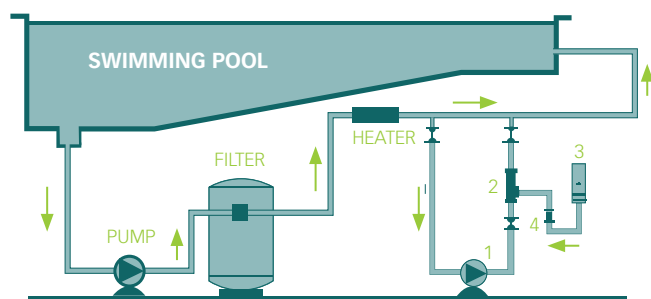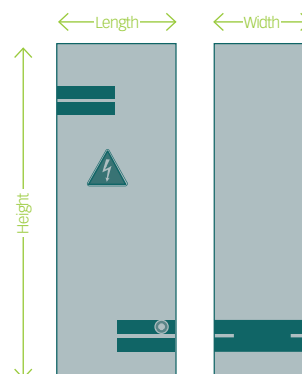

- 1 - BOOSTER PUMP
2 - OZONE INJECTOR
3 - OZONE GENERATOR
4 - NON-RETURN VALVE

**RECOMMENDED INSTALLATION
WITHOUT DEGASSING**

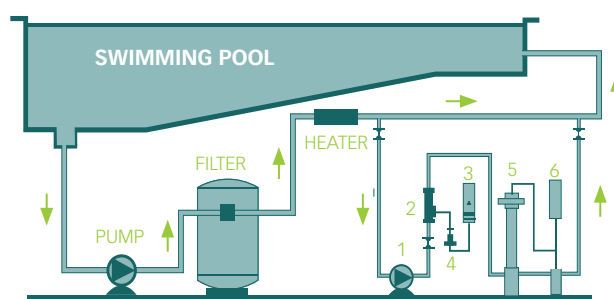

- 1 - BOOSTER PUMP
2 - OZONE INJECTOR
3 - OZONE GENERATOR
4 - NON-RETURN VALVE
5 - DEGASSER UNIT
6 - VENT DESTRUCTOR

**RECOMMENDED INSTALLATION
WITH DEGASSING**

CONTACT

TRIOPEN Ltd
Unit 14 Langlands Place
East Kilbride G75 0YF
Scotland, United Kingdom
Tel: + 44 (0) 13 55 220 598
Fax: + 44 (0) 13 55 570 058
www.triopen.com
info@triopen.com

your local distributor: