

# Mounting instructions "Forced Flow"

## Variant 1 (for variant 2, see page 2)


### Scope of delivery

#### Standard damper capacity 100 to 200 liter:

- 2 x pipe bends  $\varnothing$  18 mm
- 2 x connections
- 1 x ball valve  $\frac{1}{2}$ " with external threads

#### Standard damper capacity 300 to 5000 liter:

- 2 x pipe bends  $\varnothing$  28 mm
- 2 x connections
- 1 x ball valve 1" with external threads

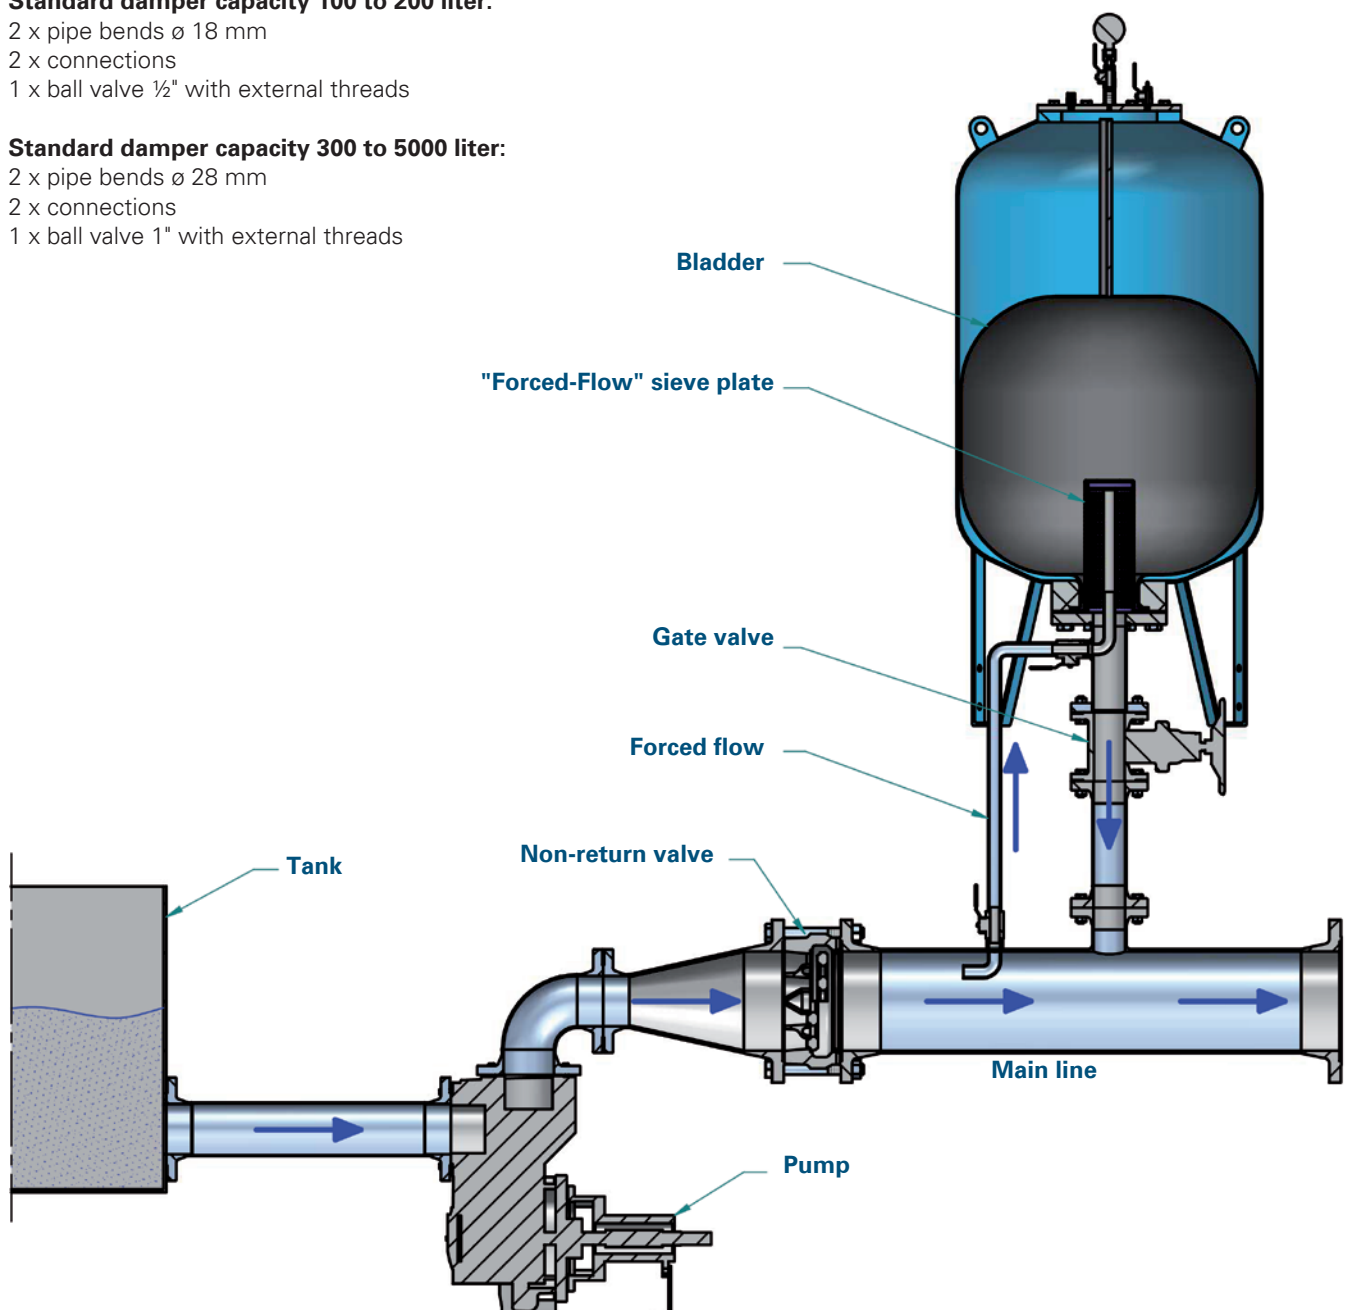

## Variant 2

### Scope of delivery

#### Standard damper capacity 100 to 200 liter:

- 2 x pipe bends ø 18 mm
- 2 x connections
- 1 x ball valve ½" with external threads

#### Standard damper capacity 300 to 5000 liter:

- 2 x pipe bends ø 28 mm
- 2 x connections
- 1 x ball valve 1" with external threads

