







Technical data

Environmental conditions	
Position of installation	For indoor usage, only for insulated cables
Ambient temperature	-10 ... +55 °C
Relative humidity	5 ... 85 % (no condensation)
Protection class	IP20
Application conditions	
Standard	IEC 61869-2
Thermal short time rated current	60 x I _n / 1 s
Thermal continuous current	100 %
Rated isolation level	0.72 / 3 / kV
Rated frequency	50 / 60 Hz
Insulation class	E (120 °C)
Cable feed through window	For conductors max. Ø 18 / 28 / 42 or 2 x 42 mm
Secondary conductor	... / 1 A: 0.5 mm ² ... / 5 A: 1.5 mm ²

KUW4/60



KUW4.2/60

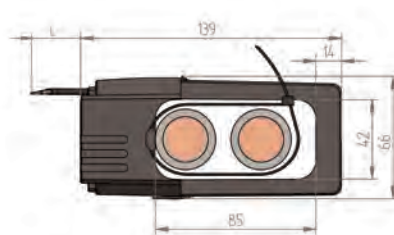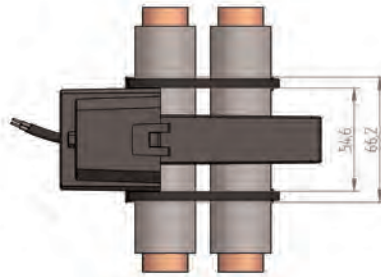

Basic Information for the use of current transformer can be found in chapter 10.