



CMOS I²C 2-WIRE BUS 1K/2K ELECTRICALLY ERASABLE PROGRAMMABLE ROM 128/256 X 8 BIT EEPROM

FEATURES :

- Power Supply Voltage
 - Single Vcc for Read and Programming (Vcc = 2.7 V to 5.5 V)
- Low Power (Isb = 2ua @ 5.5 V)
- I2C Bus, 2-Wire Serial Interface
- Support Byte Write and Page Write (8 Bytes)
- Automatic Page write Operation (maximum 10 ms)
 - Internal Control Timer
 - Internal Data Latches for 8 Bytes
- High Reliability CMOS Technology with EEPROM Cell
 - Endurance : 1,000,000 Cycles
 - Data Retention : 100 Years


DESCRIPTION:

The IC 24LC01/24LC02 is a serial 1K/2K EEPROM fabricated with 's proprietary, high reliability, high performance CMOS technology. It's 1K/2K of memory is organized as 128/256 x 8 bits. The memory is configured as 16/32 pages with each page containing 8 bytes. This device offers significant advantages in low power applications.

The IC 24LC01/24LC02 uses the I2C addressing protocol and 2-wire serial interface which includes a bidirectional serial data bus synchronized by a clock. It offers a flexible byte write and a faster 8-byte page write.

The IC 24LC01/24LC02 is assembled in either a 8-pin PDIP or 8-pin SOIC package. Pin #1 is the A0 device address input for the device. Pin #2 is the A1 device address input for the device. Pin #3 is the A2 device address input for the device, such that a total of eight 24LC01/24LC02 devices can be connected on a single bus. Pin #4 is the ground (Vss). Pin #5 is the serial data (SDA) pin used for bidirectional transfer of data. Pin #6 is the serial clock (SCL) input pin. Pin #7 is the write protect (WP) pin used to protect hardware data. Pin #8 is the power supply (Vcc) pin.

PIN DESCRIPTION

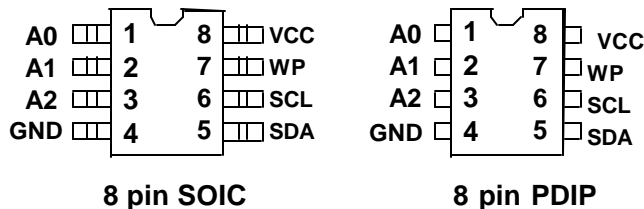

All data is serially transmitted in bytes (8 bits) on the SDA bus. To access the IC 24LC01/24LC02 (slave) for a read or write operation, the controller (master) issues a start condition by pulling SDA from high to low while SCL is high. The master then issues the device address byte which consists of 1010 (A2) (A1) (A0) (R/W). The most significant bits (1010) are a device type code signifying an EEPROM device. A0, A1, and A2 are the device address select bits which has to match the A0, A1, and A2 pin inputs on the device. The B[7] bit (or B[6] bit in the 24C01) is the most significant bit of the memory address. The read/write bit determines whether to do a read or write operation. After each byte is transmitted, the receiver has to provide an acknowledge by pulling the SDA bus low on the ninth clock cycle. The acknowledge is a handshake signal to the transmitter indicating a successful data transmission.

PIN DESCRIPTION

DEVICE ADDRESS (A0 & A1 & A2)

A0, A1, and A2 are device address inputs that enables a total of eight 24LC01/24LC02 devices to connect on a single bus. If the address input pin is left unconnected, it is interpreted as zero.

WRITE PROTECT (WP)

When the write protect input is connected to Vcc, the entire memory array is protected against write operations. For normal write operations, the write protect pin should be grounded. When the pin is left unconnected, WP is interpreted as zero.

SERIAL DATA (SDA)

SDA is a bidirectional pin used to transfer data in and out of the IC 24LC01/24LC02. The pin is an open-drain output. A pullup resistor must be connected from SDA to Vcc.

SERIAL CLOCK (SCL)

The SCL input synchronizes the data on the SDA bus. It is used in conjunction with SDA to define the start and stop conditions. It is also used in conjunction with SDA to transfer data to and from the IC 24LC01/24LC02.



DESCRIPTION (Continued):

For a write operation, the master issues a start condition, a device address byte, a memory address byte, and then up to 8 data bytes. The IC 24LC01/24LC02 acknowledges after each byte transmission. To terminate the transmission, the master issues a stop condition by pulling SDA from low to high while SCL is high.

For a read operation, the master issues a start condition and a device address byte. The IC 24LC01/24LC02 acknowledges, and then transmits a data byte, which is accessed from the EEPROM memory. The master acknowledges, indicating that it requires more data bytes. The IC 24C01/24C02 transmits more data bytes, with the memory address counter automatically incrementing for each data byte, until the master does not acknowledge, indicating that it is terminating the transmission. The master then issues a stop condition.

DEVICE OPERATION:

BIDIRECTIONAL BUS PROTOCOL:

The IC 24LC01/24LC02 follows the I2C bus protocol. The protocol defines any device that sends data onto the SDA bus as a transmitter, and the receiving device as a receiver. The device controlling the transfer is the master and the device being controlled is the slave. The master always initiates the data transfers, and provides the clock for both transmit and receive operations. The IC 24LC01/24LC02 acts as a slave device in all applications. Either the master or the slave can take control of the SDA bus, depending on the requirement of the protocol.

ACKNOWLEDGE:

All data is serially transmitted in bytes (8 bits) on the SDA bus. The acknowledge protocol is used as a handshake signal to indicate successful transmission of a byte of data. The bus transmitter, either the master or the slave (IC 24LC01/24LC02), releases the bus after sending a byte of data on the SDA bus. The receiver pulls the SDA bus low during the ninth clock cycle to acknowledge the successful transmission of a byte of data. If the SDA is not pulled low during the ninth clock cycle, the IC 24LC01/24LC02 terminates the data transmission and goes into standby mode.


START/STOP CONDITION AND DATA TRANSITIONS:

While SCL clock is high, a high to low transition on the SDA bus is recognized as a START condition which precedes any read or write operation. While SCL clock is high, a low to high transition on the SDA bus is recognized as a STOP condition which terminates the communication and places the IC 24LC01/24LC02 into standby mode. All other data transitions on the SDA bus must occur while SCL clock is low to ensure proper operation.

For the write operation, the IC 24LC01/24LC02 acknowledges after the device address byte, acknowledges after the memory address byte, and acknowledges after each subsequent data byte.

For the read operation, the IC 24LC01/24LC02 acknowledges after the device address byte. Then the IC 24C01/24C02 transmits each subsequent data byte, and the master acknowledges after each data byte transfer, indicating that it requires more data bytes. The IC 24LC01/24LC02 monitors the SDA bus for the acknowledge. To terminate the transmission, the master does not acknowledge, and then sends a stop condition.


Write Cycle Timing

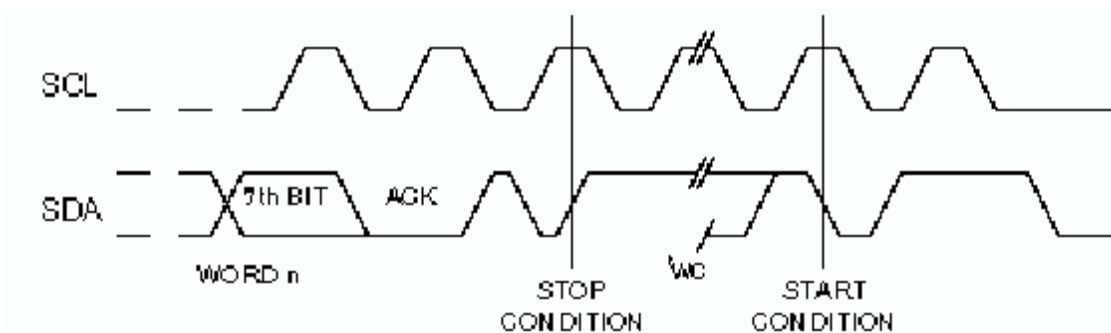


Note: The write cycle time t_{WC} is the time from a valid stop condition of a write sequence to the end of the internal clear / write cycle.




Data Valid

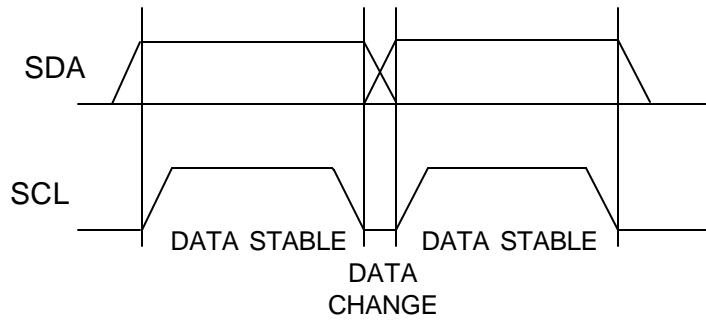

Start and Stop Definition

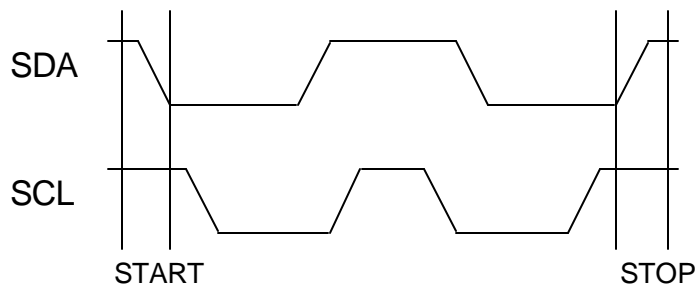

Output Acknowledge

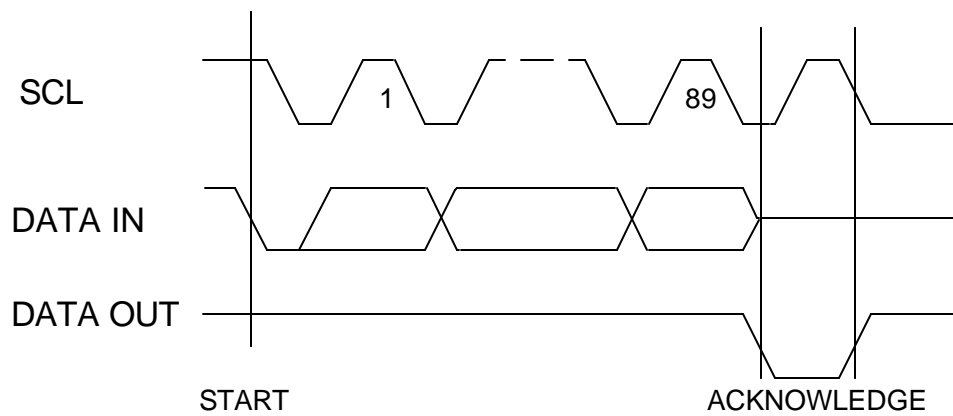



DEVICE ADDRESSING:

Following the start condition, the master will issue a device address byte consisting of 1010 (A2) (A1) (A0) (R/W) to access the selected IC 24LC01/24LC02 for a read or write operation. A0, A1, and A2 are the device address select bits which have to match the A0, A1, and A2 pin inputs on the 24LC01/24LC02 device. The B[7] bit (B[6] bit in the 24C01) is the most significant bit of the memory address. The (R/W) bit is a high (1) for read and low (0) for write. If A0, A1, or A2 are left unconnected, the IC 24LC01/24LC02 device shall interpret as V_{il} input(s).

DATA INPUT DURING WRITE OPERATION:

During the write operation, the IC 24LC01/24LC02 latches the SDA bus signal on the rising edge of the SCL clock.

DATA OUTPUT DURING READ OPERATION:

During the read operation, the IC 24LC01/24LC02 serially shifts the data onto the SDA bus on the falling edge of the SCL clock.

MEMORY ADDRESSING:

The memory address is sent by the master in the form of 2 bytes. Device address A2, A1, and A0 is included in the first byte. The remaining memory address bits B[7:0] are included in the second byte of the device address of the 24C02. The memory address byte can only be sent as part of a write operation. On the other hand, in the 24C01, the first byte is the same as in the 24C02; however, the second byte of the 24C01 contains remaining address bits B[6:0]. The B[7] bit in the 24C01 is treated as a 'don't care' bit.

BYTE WRITE OPERATION:

The master initiates the byte write operation by issuing a start condition, followed by the device address byte 1010 (A2) (A1) (A0) 0, followed by the memory address byte, followed by one data byte, followed by an acknowledge, then a stop condition. After each byte transfer, the IC 24C01/24C02 acknowledges the successful data transmission by pulling the SDA bus low. The stop condition starts the internal EEPROM write cycle, and all inputs are disabled until the completion of the write cycle.

PAGE WRITE OPERATION:

The master initiates the page write operation by issuing a start condition, followed by the device address byte 1010 (A2) (A1) (A0) 0, followed by the memory address byte, followed by up to 8 data bytes, followed by an acknowledge, then a stop condition. After each byte transfer, the IC 24LC01/24LC02 acknowledges the successful data transmission by pulling SDA low. After each data byte transfer, the memory address counter is automatically incremented by one. The stop condition starts the internal EEPROM write cycle only if the stop condition occurs in the clock cycle immediately following the acknowledge (10th clock cycle). All inputs are disabled until the completion of the write cycle.

POLLING ACKNOWLEDGE:

During the internal write cycle of a write operation in the IC 24LC01/24LC02, the completion of the write cycle can be detected by polling acknowledge. The master starts acknowledge polling by issuing a start condition, then followed by the device address byte 1010 (A2) (A1) (A0) 0. If the internal write cycle is finished, the IC 24LC01/24LC02 acknowledges by pulling the SDA bus low. If the internal write cycle is still ongoing, the IC 24LC01/24LC02 does not acknowledge because its inputs are disabled. Therefore, the device will not respond to any command. By using polling acknowledge, the system delay for write operations can be reduced. Otherwise, the system needs to wait for the maximum internal write cycle time, t_{WC}, given in the spec.

POWER ON RESET:


The IC 24LC01/24LC02 has a Power On Reset circuit (POR) to prevent data corruption and accidental write operations during power up. On power up, the internal reset signal is on and the IC 24LC01/24LC02 will not respond to any command until the VCC voltage has reached the POR threshold value.




24LC01/24LC02

PRODUCT INTRODUCTION


Device Address

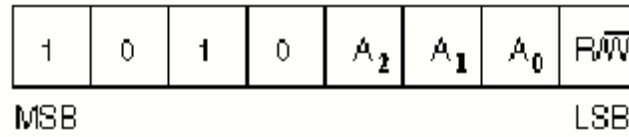

Byte Write

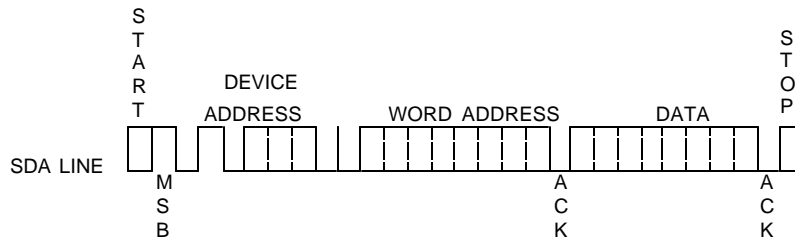

Page Write

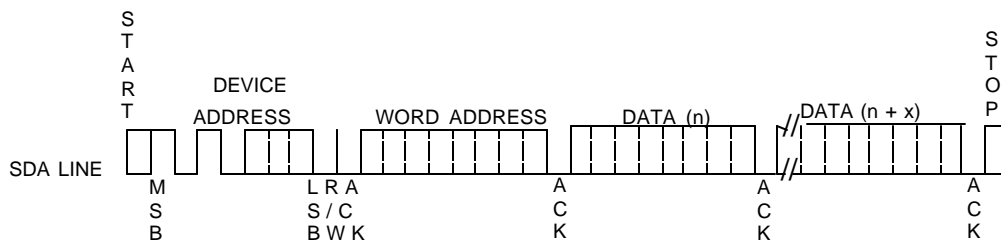



24LC01/24LC02

PRODUCT INTRODUCTION

CURRENT ADDRESS READ:

The internal memory address counter of the IC 24C01/24C02 contains the last memory address accessed during the previous read or write operation, incremented by one. To start the current address read operation, the master issues a start condition, followed by the device address byte 1010 (A2) (A1) (A0) 1. The IC 24LC01/24LC02 responds with an acknowledge by pulling the SDA bus low, and then serially shifts out the data byte accessed from memory at the location corresponding to the memory address counter. The master does not acknowledge, then sends a stop condition to terminate the read operation. It is noted that the memory address counter is incremented by one after the data byte is shifted out.

RANDOM ADDRESS READ:


The master starts with a dummy write operation (one with no data bytes) to load the internal memory address counter by first issuing a start condition, followed by the device address byte 1010 (A2) (A1) (A0) 0, followed by the memory address bytes. Following the acknowledge from the IC 24C01/24C02, the master starts the current read operation by issuing a start condition, followed by the device address byte 1010 (A2) (A1) (A0) 1. The IC 24LC01/24LC02 responds with

an acknowledge by pulling the SDA bus low, and then serially shifts out the data byte accessed from memory at the location corresponding to the memory address counter. The master does not acknowledge, then sends a stop condition to terminate the read operation. It is noted that the memory address counter is incremented by one after the data byte is shifted out.


SEQUENTIAL READ:

The sequential read is initiated by either a current address read or random address read. After the IC 24C01/24C02 serially shifts out the first data byte, the master acknowledges by pulling the SDA bus low, indicating that it requires additional data bytes. After the data byte is shifted out, the IC 24LC01/24LC02 increments the memory address counter by one. Then the IC 24LC01/24LC02 shifts out the next data byte. The sequential reads continues for as long as the master keeps acknowledging. When the memory address counter is at the last memory location, the counter will 'roll-over' when incremented by one to the first location in memory (address zero). The master terminates the sequential read operation by not acknowledging, then sends a stop condition.

Current Address Read

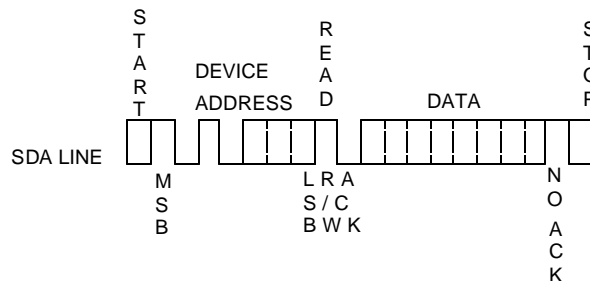

Random Read

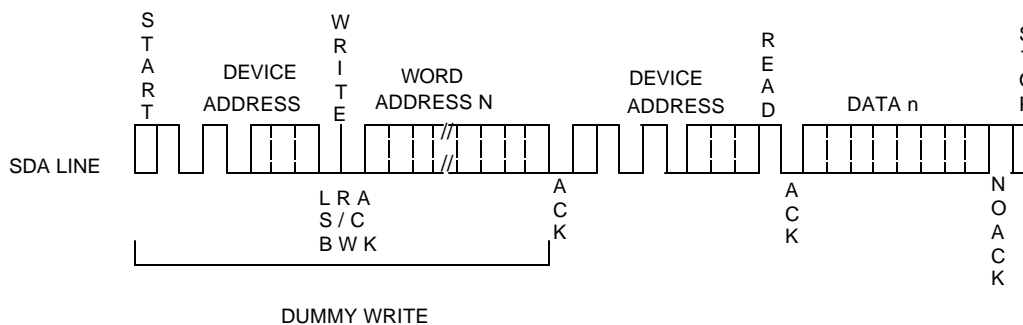




24LC01/24LC02

PRODUCT INTRODUCTION

Sequential Read

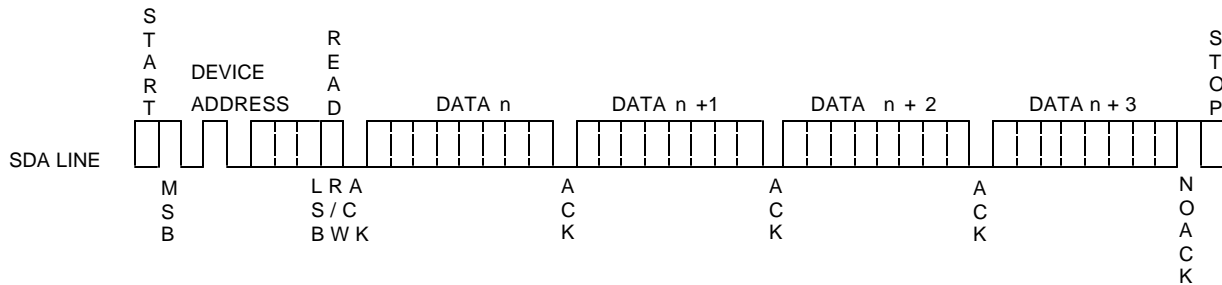

ABSOLUTE MAXIMUM RATINGS

TEMPERATURE

Storage: -65°C to 150°C

Under Bias: -55°C to 125°C

ALL INPUT OR OUTPUT VOLTAGES

with respect to V_{SS} +6 V to -0.3 V

* "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

RECOMMENDED OPERATING CONDITIONS

Temperature Range: Commercial: 0°C to 70°C

V_{CC} Supply Voltage: 2.7 to 5.5 Volts


Endurance: 1,000,000 Cycles/Byte
Data Retention: 100 Years

D.C. CHARACTERISTICS

Symbol	Parameter	Condition	Min	Max	Units
I _{CC1}	Active V _{CC} Current	READ at 100 KHZ	0.4	1.0	mA
I _{CC2}	Active V _{CC} Current	WRITE at 100 KHZ		3.0	mA
I _{SB}	Standby Current	V _{CC} = 2.7 v		0.5	uA
I _{IL}	Input Leakage Current	V _{CC} = 5.5 v V _{IN} =V _{CC} Max		2.0	uA
I _{OL}	Output Leakage Current			3	uA
V _{IL}	Input Low Voltage		-1.0	0.8	V
V _{IH}	Input High Voltage		V _{CC} x0.7	V _{CC} +0.5	V
V _{OL1}	Output Low	V _{CC} =4.5v I _{OL} =2.1 mA		0.4	V



Bus Timing

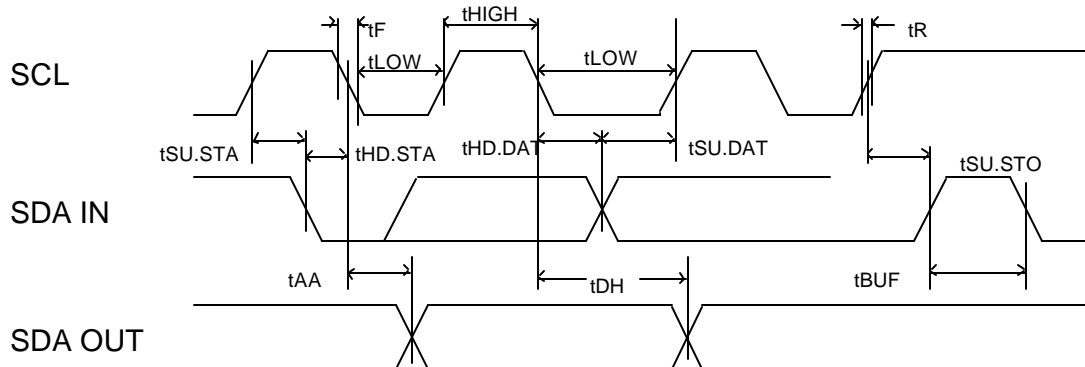

A.C. CHARACTERISTICS

Symbol	Parameter	2.7 volt		5.5 volt		Units
		Min	Max	Min	Max	
SCL	SCL Clock Frequency		100		400	kHZ
T	Noise Suppression Time (1)		100		50	ns
tLOW	Clock Low Period	4.7		1.2		us
tHIGH	Clock High Period	4.0		0.6		us
tAA	SCL Low to SDA Data Out	0.1	4.5	0.1	0.9	us
tBUF	Bus Free to New Start (1)	4.7		1.2		us
tHD.STA	Start Hold Time	4.0		0.6		us
tSU.STA	Start Set-up Time	4.7		0.6		us
tHD.DAT	Data-in Hold Time	0		0		us
tSU.DAT	Data-in Set-up Time	200		100		ns
tR	SCL and SDA Rise Time (1)		1.0		0.3	us
tF	SCL and SDA Fall Time (1)		300		300	ns
tSU.STO	Stop Set-up Time	4.7		0.6		us
tDH	Data-out Hold Time	100		50		ns
tWC	Write Cycle Time	10			10	ms

Note: 1 This parameter is characterized and not 100% tested.