

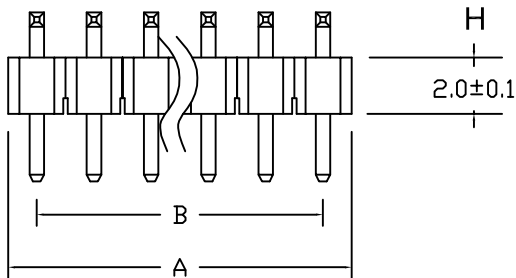


ÓÉ Foxit PDF Editor ±â¼-
pæÈ"ËÜÖÐ (c) by Foxit Software Company, 2004
½00ÁÖU/EA¹Ä½

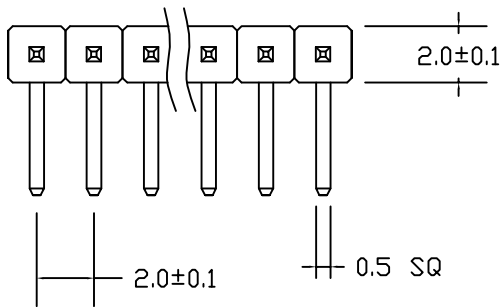

P.C.B LAYOUT

SPECIFICATIONS

Material:

Insulator:PBT (UL94V-0),Black

Contacts:Brass

Plating:Au or Sn over 50u'' Ni

Electrical Charactristics:


Contact Resistance:20mΩ Max.

Insulator Resistance:1000MΩ Min.

Withstanding Voltage:AC 1000V

Currernt Rating:1.5 AMP

Operating Temperature:-40℃ to +105℃

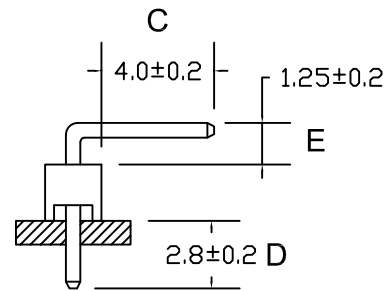

未注公差按公差分段要求

Position Dimension	1 Thru 40
A± 0.30	2.0* No. of Positions
B± 0.20	2.0 * No. of Contacts-2.0
H	1.0/1.5/2.0

MATERIAL(材质)		单位 MM	比例 按图纸缩放	日期 2013-06-14	深圳市百富特电子有限公司	
主体	PBT					
端子	黄铜镀金					
公差 分段	>10 ±0.30 <10 ±0.20 <3 ±0.10	制图	审查	核准	品名	2.0(H2.0)1*NP 90° 普弯
视角		刘建			料号	