

# Miniature Incremental Rotary Encoder

Shaft model





Max. speed: 12 000 rpm

Shaft: Ø 4/6 mmOutput: push-pull

Cable connection: 2 m

Pulse count: 50-1024 pulsesMax. pulse frequency: 160 kHz

Supply: 5-24 V<sub>DC</sub>

Max. temperature: +85°C

Protection type: IP 64





#### **Description**

KOBOLD rotary encoders are used to measure length, position, rotational speed and angle. They convert mechanical motion to electrical signals. Incremental rotary encoders output a frequency signal which can represent speed, length or position.

A rotatable disc, on which a grating is attached, is mounted between an LED and a receiver. The light emitted from the LED is modulated by the grating and hits the receiver, which outputs a sinusoidal signal that is proportional to the light received. The sinusoidal signal is processed by specially designed electronics. Standard control systems - including all KOBOLD counters - require digital, square-wave signals at the input. Thus the signal is conditioned in the rotary encoder and is output through different output circuits depending on the field of application.

#### Areas of application

- Mounting technology
- Feeders and handling machines for electronic components
- Medical engineering (e.g. stirring machines)
- Inserting plant, letter opening machines
- Inspection platforms
- Labelling machines
- Pipe inspection machines (camera control)

#### **Technical Details:**

Max. speed: 12 000 rpm

Moment of inertia

of rotor: approximately 0.1 x 10<sup>-6</sup> kgm<sup>2</sup>

Initial torque: < 0.001 Nm

Radial shaft loadability: 10 N Axial shaft loadability: 15 N

Shaft: Ø 4 mm or

Ø 6 mm stainless steel Flange connection: Ø 24 mm or Ø 30 mm Impact resistance: 1000 m/s², 6 ms

Vibration resistance: 100 m/s², 55 - 2000 Hz

Operating

temperature range: -20 to +85 °C

Working

temperature range: -20 to +90 °C

Output circuit: push-pull with or

without inversion short-circuit-proof

Electrical connection: 2 m cable axial or radial

Pulse count: 50-1024 pulses

Max. pulse frequency: 160 kHzSupply:  $5-24 \text{ V}_{DC}$ Current consumption: max. 50 mA

Permissible

Pulses per revolution: 50, 100, 200, 360,

500, 1000, 1024

Protection type: IP 64 (case)


Weight: approximately 0.06 kg


## Order details (Example: ZDI-AW 11 G 6 0050)

Model	Description	Flange/shaft	Output circuit	Electrical connection	Pulse count (always use 4 digits)
ZDI-AW	Incremental miniature rotary encoder - shaft model	11= Ø 24 mm/ Ø 4 mm 22= Ø 30 mm/ Ø 6 mm	G= push-pull without inversion H= push-pull with inversion	5= 2 m cable, radial (standard) 6= 2 m cable, axial (special)	0050, 0100, 0200, 0360, 0500, 1000, 1024



### **Dimensions**

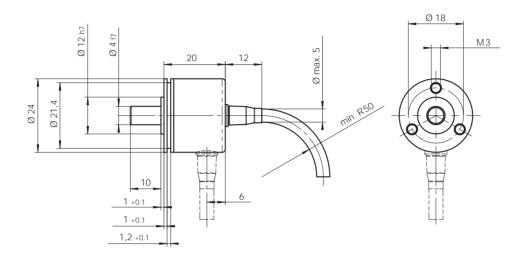

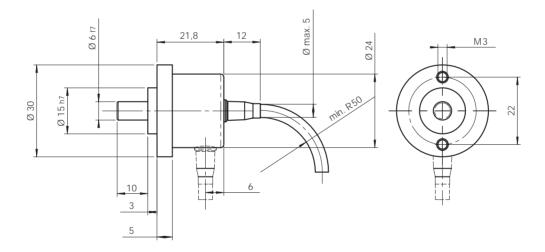



# Please refer to our brochure Z2...



...for control units and relays

4