

# 40KM DWDM SFP+ Optical Transceiver SFP+-10G-DWDM-40-XX

#### **Features**

- ◆ Compliant with SFF-8431,SFF-8432 and IEE802.3ae
- ♦ 10GBASE-ER, and 2G/4G/ 8G/10G Fiber Channel applications.
- Suitable for use in 100GHz channel spacing DWDM systems
- ♦ Cooled EML transmitter and PIN receiver
- ♦ link length up to 40km
- ♦ Low Power Dissipation 1.5W Maximum
- ◆ -5°C to 70°C Operating Case Temperature
- ♦ Single 3.3V power supply
- Diagnostic Performance Monitoring of module temperature, supply
  Voltages, laser bias current, transmit optical power, receive optical power
- ♦ RoHS6 compliant and lead free



#### **Applications**

- ◆ 10GBASE-ER (with/without FEC)
- ♦ 10G Fiber Channel

### **Description**

ZYTOM SFP+ER DWDM Transceiver is a "Limiting module", designed for 10GBASE-ER, and 2G/4G/8G/10G Fiber- Channel applications.

The transceiver consists of two sections: The transmitter section incorporates a colded EML laser. And the receiver section consists of a PIN photodiode integrated with a TIA. All modules satisfy class I laser safety requirements. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage.





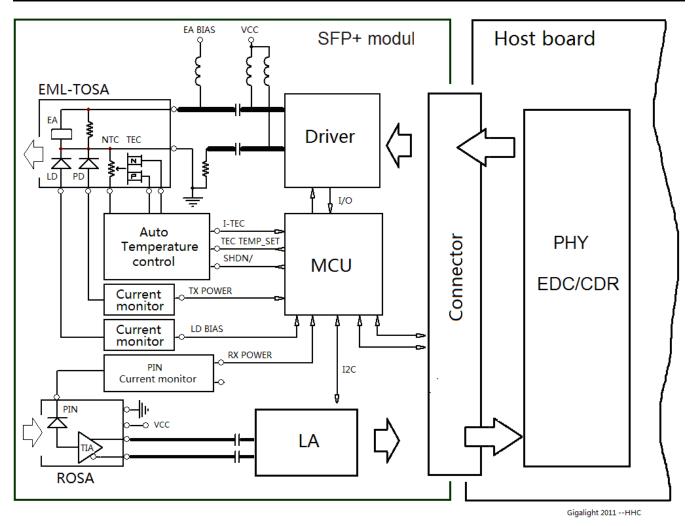


Figure 1. Module Block Diagram

**Absolute Maximum Ratings** 

Parameter	Symbol	Min	Max	Unit
Supply Voltage	Vcc	-0.5	3.8	V
Storage Temperature	Tst	-40	85	°C
Relative Humidity	Rh	0	85	%

**Operating Conditions** 

<b>U</b>					
Parameter	Symbol	Min	Typical	Max	Unit

Page 2 of 10 July 19 / 2013



Supply Voltage	Vcc	3.13	3.3	3.46	V
Supply current1]	Icc	-	360	450	mA
Operating Case temperature	Tca	-5	-	70	°C
Module Power Dissipation	Pm	-	1.2	1.5	W

**Transmitter Specifications - Optical** 

Parameter	Symbol	Min	Typical	Max	Unit
Center Wavelength-Start of Life [1]	С	c -25	С	c +25	pm
Center Wavelength-End of life [1]	С	c-100	С	c+100	pm
Spectral Width (-20dB)	Δλ20	-	-	0.3	nm
Average Optical Power	Ро	-1	-	+3	dBm
Side Mode Suppression Ratio	SMSR	30	-	-	dB
Optical Transmit Power (disabled)	PTX_DISABL	-	-	-30	dBm
Extinction Ratio	ER	8.2	-	-	dB
Relative Intensity Noise	RIN	-	-	-128	dB/Hz
Optical Return Loss Tolerance	Orl	-	-	21	dB

**Receiver Specifications - Optical** 

Parameter	Symbol	Min	Typical	Max	Unit
Input Operating Wavelength	λ	1260	-	1600	nm
Average receive power	Pavg	-15.8	-	-1.0	dBm
Receiver sensitivity in 9.95G~11.1Gbps(OMA)	Rsen1	-	-	-14.1	dBm
Stressed receiver sensitivity in 9.95G~11.1Gbps(OMA)	Rsen2	-	-	-11.3	dBm
Dispersion penalty(800ps/nm) PRBS 2^31-1@9.95~11.1Gbps	DP	-	-	2	dB
Reflectance	Rrx	-	-	-26	dB
LOS Asserted	Lsa	-28	-	-	dBm
LOS De-Asserted	Lda	-	-	-19	dBm
LOS Hysteresis	Lh	0.5	-	-	dB

#### Notes:

[1] Measured with conformance test signal for BER =  $10^{-12}$ . The stressed sensitivity values in the table are for system level BER measurements which include the effects of CDR circuits. It is recommended that at least 0.4 dB additional margin be allocated if component level measurements are made without the effects of CDR circuits.

**Transmitter Specifications - Electrical** 

Parameter	Symbol	Min	Typical	Max	Unit
-----------	--------	-----	---------	-----	------

Page 3 of 10 July 19 / 2013



Data Rate	Mra	-	10.3	11.1	Gbps
Input differential impedance	Rim	-	100	-	Ω
Differential data Input	VtxDIFF	120	-	850	mV
Transmit Disable Voltage	VD	2.0	-	Vcc3+0.3	V
Transmit Enable Voltage	Ven	0	-	+0.8	V
Transmit Disable Assert Time	Vn	-	-	100	us

Receiver Specifications – Electrical

Parameter	Symbol	Min	Typical	Max	Unit
Data Rate	Mra	-	10.3	11.1	Gbps
Differential Output Swing	Vout P-P	350	-	850	mV
Rise/Fall Time	Tr / Tf	24	-	-	ps
Loss of Signal –Asserted	VOH	2	-	Vcc3+0.3-	V
Loss of Signal –Negated	VOL	0	-	+0.4	V

**Digital Diagnostic Functions** 

Digital Diagnostic I unctions								
Parameter	Symbol	Min.	Max	Unit	Notes			
	Accuracy							
Transceiver Temperature	DMI_Temp	-3	+3	degC	Over operating temp			
TX Output optical power	DMI_TX	-3	+3	dB				
RX Input optical power	DMI_RX	-3	+3	dB	-3dBm to -12dBm range			
Transceiver Supply voltage	DMI_VCC	-0.08	+0.08	V	Full operating range			
Bias current monitor	DMI_Ibias	-10%	10%	mA				
	Dynamic	Range Accura	асу					
Transceiver Temperature	DMI_Temp	-5	70	degC				
TX Output optical power	DMI_TX	-1	+2	dBm				
RX Input optical power	DMI_RX	-18	0	dBm				
Transceiver Supply voltage	DMI_VCC	3.0	3.6	V				
Bias current monitor	DMI_Ibias	0	100	mA				

C-band λc Wavelength Guide


ITU Channel Product Code Frequency(THz) Wavelength	ITU Channel Product Code Frequency(THz) Wa	velength
--	--	----------

Page 4 of 10 July 19 / 2013



17	191.7	1563.86	40	194.0	1545.32
18	191.8	1563.05	41	194.1	1544.53
19	191.9	1562.23	42	194.2	1543.73
20	192.0	1561.42	43	194.3	1542.94
21	192.1	1560.61	44	194.4	1542.14
22	192.2	1559.79	45	194.5	1541.35
23	192.3	1558.98	46	194.6	1540.56
24	192.4	1558.17	47	194.7	1539.77
25	192.5	1557.36	48	194.8	1538.98
26	192.6	1556.55	49	194.9	1538.19
27	192.7	1555.75	50	195.0	1537.40
28	192.8	1554.94	51	195.1	1536.61
29	192.9	1554.13	52	195.2	1535.82
30	193.0	1553.33	53	195.3	1535.04
31	193.1	1552.52	54	195.4	1534.25
32	193.2	1551.72	55	195.5	1533.47
33	193.3	1550.92	56	195.6	1532.68
34	193.4	1550.12	57	195.7	1531.90
35	193.5	1549.32	58	195.8	1531.12
36	193.6	1548.51	59	195.9	1530.33
37	193.7	1547.72	60	196.0	1529.55
38	193.8	1546.92	61	196.1	1528.77
39	193.9	1546.12			

Page 5 of 10 July 19 / 2013 Rev. B

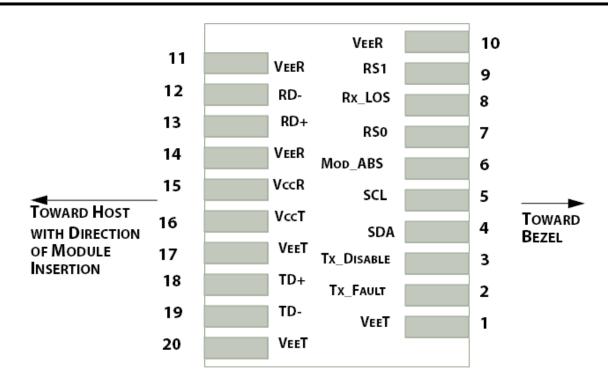

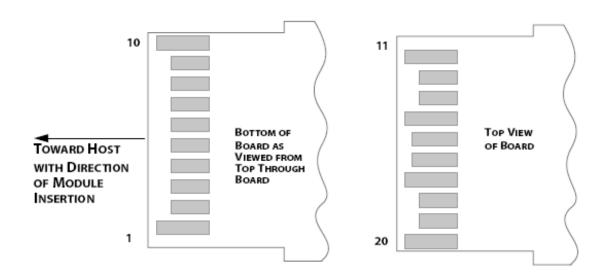


Figure 2. Electrical Pin-out Details

### **Pin Descriptions**

Pin	Symbol	Name/Description
1	VEET [1]	Transmitter Ground

Page 6 of 10 July 19 / 2013



2	Tx_FAULT [2]	Transmitter Fault	
3	Tx_DIS [3]	Transmitter Disable. Laser output disabled on high or open	
4	SDA [2]	2-wire Serial Interface Data Line	
5	SCL [2]	2-wire Serial Interface Clock Line	
6	MOD_ABS [4]	Module Absent. Grounded within the module	
7	RS0 [5]	Rate Select 0	
8	RX_LOS [2]	Loss of Signal indication. Logic 0 indicates normal operation	
9	RS1 [5]	Rate Select 1	
10	VEER [1]	Receiver Ground	
11	VEER [1]	Receiver Ground	
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver DATA out. AC Coupled	
14	VEER [1]	Receiver Ground	
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET [1]	Transmitter Ground	
18	TD+	Transmitter DATA in. AC Coupled	
19	TD-	Transmitter Inverted DATA in. AC Coupled	
20	VEET [1]	Transmitter Ground	

#### Notes:

- [1] Module circuit ground is isolated from module chassis ground within the module.
- [2].should be pulled up with 4.7k 10k ohms on host board to a voltage between 3.15Vand 3.6V.
- [3]Tx\_Disable is an input contact with a 4.7 k $\Omega$  to 10 k $\Omega$  pullup to VccT inside the module.
- [4]Mod\_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull this contact up to Vcc\_Host with a resistor in the range 4.7 k $\Omega$  to 10 k $\Omega$ . Mod\_ABS is asserted "High" when the SFP+ module is physically absent from a host slot.
- [5] RS0 and RS1 are module inputs and are pulled low to VeeT with > 30 k $\Omega$  resistors in the module.

Page 7 of 10 July 19 / 2013

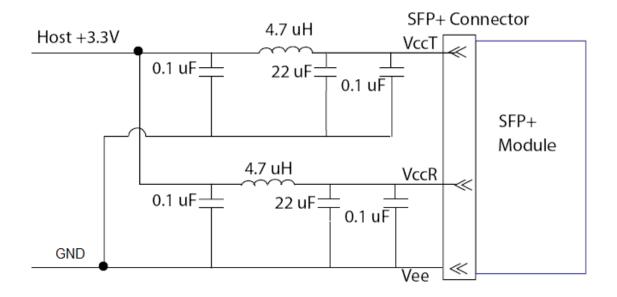


Figure 3. Host Board Power Supply Filters Circuit

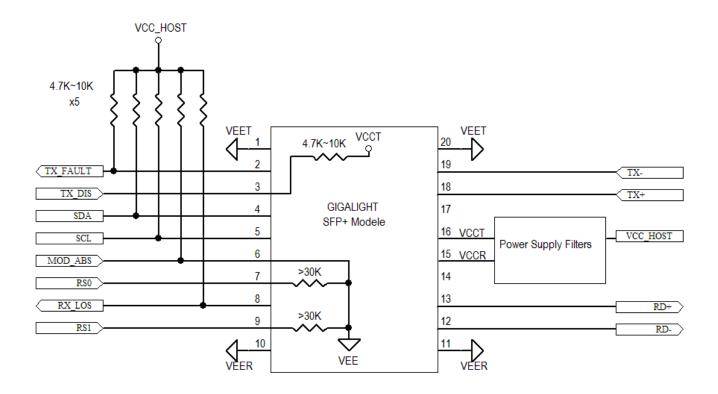


Figure 4. Host-Module Interface

Page 8 of 10 July 19 / 2013

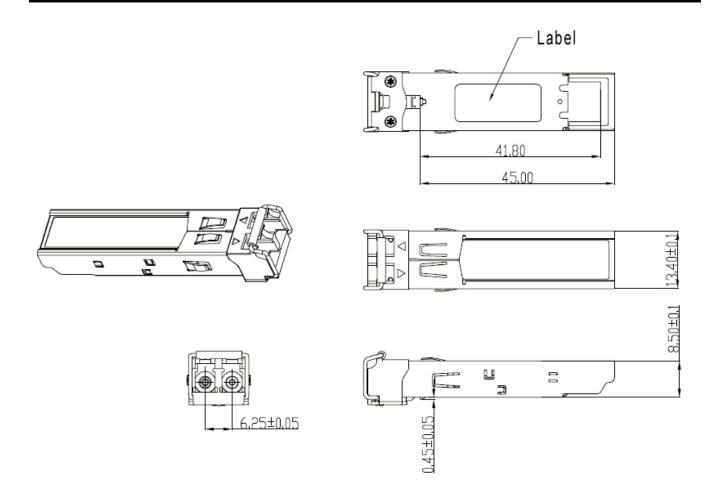


Figure 5. Mechanical Specifications

**Regulatory Compliance**ZYTOM SFP+ transceiver is designed to be Class I Laser safety compliant and is certified per the following standards:

Feature	Agency	Standard	Certificate / Comments
Laser Safety	FDA	CDRH 21 CFR 1040 annd Laser Notice No. 50	1120292-000
Product Safety	UL	UL and CUL EN60950-2:2007	E347511
Environmental protection	SGS	RoHS Directive 2002/95/EC	GZ1001008918/CHEM
EMC	WALTEK	EN 55022:2006+A1:2007 EN 55024:1998+A1+A2:2003	WT10093759-D-E-E

#### Ordering information

Part Number	Product Description
SFP+-10G-DWDM-40-XX	XX= ITU Grid 17~61, 10Gbps, DWDM SFP+ 40km, -5°C ~ +70°C

Page 9 of 10 July 19 / 2013 Rev. B



#### References

- 1. "Specifications for Enhanced Small Form Factor Pluggable Module SFP+", SFF-8431, Rev 4.1, July 6, 2009.
- 2. "Improved Pluggable Formfactor", SFF-8432, Rev 4.2, Apr 18,2007
- 3. IEEE802.3ae 2002
- 4. "Diagnostic Monitoring Interface for Optical Transceivers" SFF-8472, Rev 10.3, Dec 1,2007

#### **Important Notice**

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by ZYTOM before they become applicable to any particular order or contract. In accordance with the ZYTOM policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of ZYTOM or others. Further details are available from any ZYTOM sales representative.

Page 10 of 10 July 19 /