



CLEAR PVC PIPE & FITTINGS 透明管及管件產品



PVC透明管及管件，是全透明之管道系統，其具有內壁光滑、清晰可視之特性，因此無需其他特殊裝置，既可隨時有效觀察及監視流體之狀況，如在發生任何異常狀況時，亦可迅速且簡便的完成處理，因此PVC透明管及管件廣泛被應用在雙套管道系統。

PVC透明管及管件之規格是以SCH40為標準，尺寸範圍為：1/2" ~ 4"，其建議之工作溫度為：0°C~60°C。




KUNSHAN SHIEYU VALVE CO., LTD.

● 管材 PIPE

Unit: mm


公稱尺寸 Nom. Size (Inch)	O.D	I.D	T
1/2	21.3	17.30	2.0
3/4	26.7	21.70	2.5
1	33.4	28.40	2.5
1-1/4	38.0	30.00	3.0
1-1/2	48.3	42.30	3.0
2	60.3	53.30	3.5
2-1/2	73.0	65.00	4.0
3	88.9	79.90	4.5
4	114.3	104.30	5.0
6	168.3	157.30	5.5



● 平接頭 Couplings (SocxSoc)

Unit: mm

公稱尺寸 Nom. Size (Inch)	M	d1	d2	l	d	N	L
1/2	30.16	21.54	21.23	24.22	16	3.56	52
3/4	34.93	26.87	26.57	27.40	22	5.20	60
1	42.86	33.66	33.27	30.58	28	3.00	64
1-1/4	53.98	38.43	37.57	35.50	35	3.20	69
1-1/2	60.33	48.56	48.11	37.93	43	4.14	79
2	73.03	60.63	60.17	40.10	54	5.80	87
2-1/2	85.85	73.30	72.75	45.09	62	4.83	95
3	107.95	89.31	88.70	50.63	80	6.74	108
4	133.35	114.80	114.10	60.15	100	5.70	126




CLEAR PVC FITTINGS



90度彎頭 90° Elbows (SocxSoc)

Unit: mm


公稱尺寸 Nom.Size (Inch)	M	d1	d2	l	d	G
1/2	30.16	21.54	21.23	24.22	16	13.0
3/4	34.93	26.87	26.57	27.40	22	15.0
1	42.86	33.66	33.27	30.58	28	18.0
1-1/4	53.98	38.43	37.57	35.50	35	23.0
1-1/2	60.33	48.56	48.11	37.93	43	26.0
2	73.03	60.63	60.17	41.10	54	32.0
2-1/2	85.85	73.30	72.75	45.09	62	35.0
3	107.95	89.31	88.70	50.63	80	46.5
4	133.35	114.80	114.10	60.15	100	59.0



45度彎頭 45° Elbows (SocxSoc)

Unit: mm

公稱尺寸 Nom.Size (Inch)	M	d1	d2	l	d	J
1/2	30.16	21.54	21.23	24.22	16	6.5
3/4	34.93	26.87	26.57	27.40	22	8.0
1	42.86	33.66	33.27	30.58	28	8.0
1-1/4	53.98	38.43	37.57	35.50	35	10.0
1-1/2	60.33	48.56	48.11	37.93	43	12.0
2	73.03	60.63	60.17	41.10	54	16.0
2-1/2	85.85	73.30	72.75	45.09	62	18.0
3	107.95	89.31	88.70	50.63	80	19.5
4	133.35	114.80	114.10	60.15	100	26.0

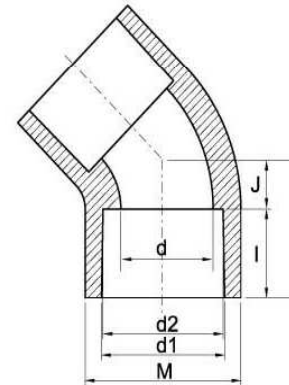

正三通 Tees (SocxSocxSoc)

Unit: mm

公稱尺寸 Nom.Size (Inch)	M	d1	d2	l	d	G	L
1/2	30.16	21.54	21.23	24.22	16	13.0	74.44
3/4	34.93	26.87	26.57	27.40	22	15.0	84.40
1	42.86	33.66	33.27	30.58	28	18.0	97.16
1-1/4	53.98	38.43	37.57	35.50	35	20.0	110.24
1-1/2	60.33	48.56	48.11	37.93	43	26.0	127.90
2	73.03	60.63	60.17	41.10	54	32.0	146.20
2-1/2	85.85	73.30	72.75	45.09	62	35.0	160.20
3	107.95	89.31	88.70	50.63	80	46.5	194.30
4	133.35	114.80	114.10	60.15	100	59.0	238.30

